

Product Brochure



2026



Impey

Designed for beautiful bathrooms.
Trusted for accessible living.

welcome

**Designed for beautiful bathrooms,
trusted for accessible living**

At Impey, we believe great showering design should never ask people to choose between style, safety and performance.

As the UK's market-leading wetroom brand, Impey has spent more than 25 years shaping the way level-access showering is designed, made and experienced. We pioneered the first wetroom floor former with a built-in gradient, helping define the modern wetroom for both healthcare and residential settings. Today, our products support projects across private homes, hospitality, specification and care environments, combining elegant design with practical innovation and lasting reliability.

What sets Impey apart is not simply what we make, but how we think. We design with care. We innovate with purpose. We manufacture with precision. And we support our customers with the technical expertise, product knowledge and service needed to turn ambitious ideas into successful showering spaces.

For homeowners, that means bathrooms that feel calm, refined and future-ready. For specifiers, installers and healthcare professionals, it means proven solutions that deliver confidence, dignity and dependable performance. For every audience, it means the reassurance of working with a brand that helped pioneer the category and continues to lead it.



This is Impey

Beautifully considered showering,
grounded in innovation, quality and care.

Impossibilities made possible, especially for you

A heritage story shaped by care, determination and a desire to make everyday life better. Founded in Somerset in 1995 by Bruce Grave, Impey was built on a determination to remove barriers and improve everyday life through better design.

At a time when accessible showering was too often seen as purely functional, Impey changed expectations and defined the market, creating solutions that combined performance, independence and style.

Impey saw the need to do things differently.

It was not enough to create products that simply worked. They had to feel right for real homes and real people.

Practicality mattered, but so did pride, confidence and the feeling of being cared for.

Impey pioneered level-access showering for healthcare settings and created the wider wetroom market. That spirit still defines Impey today.

Through every innovation, every product and every improvement, the goal has remained the same.

Impey has always put people first.

Every innovation has been driven by the same idea - making spaces work better, feel better and perform better for all who use them. This spirit still defines everything we do today.



“
Showering should be accessible, dignified
and enjoyable for everyone.”


Impey founder, Bruce Grave

The Impey brand journey

Making lives better, one showering space at a time.




1995
Impey is founded in Somerset by Bruce Grave. A name that captures the brand's meaning and purpose; **IMPOSSIBILITIES MADE POSSIBLE. ESPECIALLY FOR YOU.**

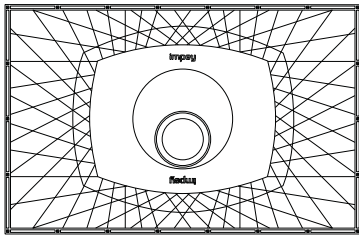

2004
The development of the Aqua-Dec transforms the tiled wetroom market and marks a major step forward for the brand.



2013
Impey WaterGuard™ is launched, bringing advanced waterproofing performance to installers. Today, WaterGuard™ remains one of its kind and a world-class leading tanking membrane.

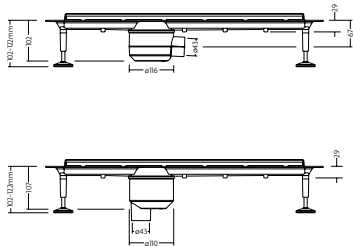

2014
Universal drainage components are introduced across standard and Linear floor, making wetroom installation simpler and more efficient.



Today
Impey stands as the UK's recognised market-leading wetroom manufacturer, trusted for innovation, quality and a commitment to improving lives through design-led accessible showering.

Up next!
Significant launches coming soon – follow us on social media to keep up to date.



Early years
Impey pioneers' level-access showering for vinyl floors, helping more people enjoy safer, more independent living at home.



2010
Impey strengthens its position, continuing to grow as a market leader. Building on Impey's reputation for trust, innovation and care.



2019
Innovative Linear drain design wins at the **Architects' Journal Specification Awards**, recognising Impey's continued leadership in design and product innovation.



Vinyl Central Drain
Coming soon - The Impey Vinyl Central Drain – a market-first stainless steel drain solution for vinyl wetroom floors, available with either a brushed stainless steel top or a Vinyl Insert top.



600,000+
Impey wetrooms installed throughout the UK and Europe

1 MILLION+
square metres of waterproof tanking installed

30 YEARS+
UK's recognised market-leading wetroom manufacturer

Keep up to date - follow us on social media



Our values




Driven by purpose. Defined by people

We design with care, innovate with intent, and deliver with precision. Because every detail matters when it comes to your space.



Design without compromise

At Impey, we believe great design should work for everyone. Beautiful spaces. Intelligent engineering. Total confidence.



Always moving forward

Smarter solutions. Seamless installation. Better outcomes.



Built to last. Proven to perform

Engineered for reliability, manufactured in the UK, trusted every single day.



Design for everyone

Freedom, dignity, and independence - without compromise.




Made for simplicity

Precision-engineered systems that make every step easier.



Responsibility built into every solution

Thoughtfully designed, carefully manufactured and continuously improved to support people, places and the future.

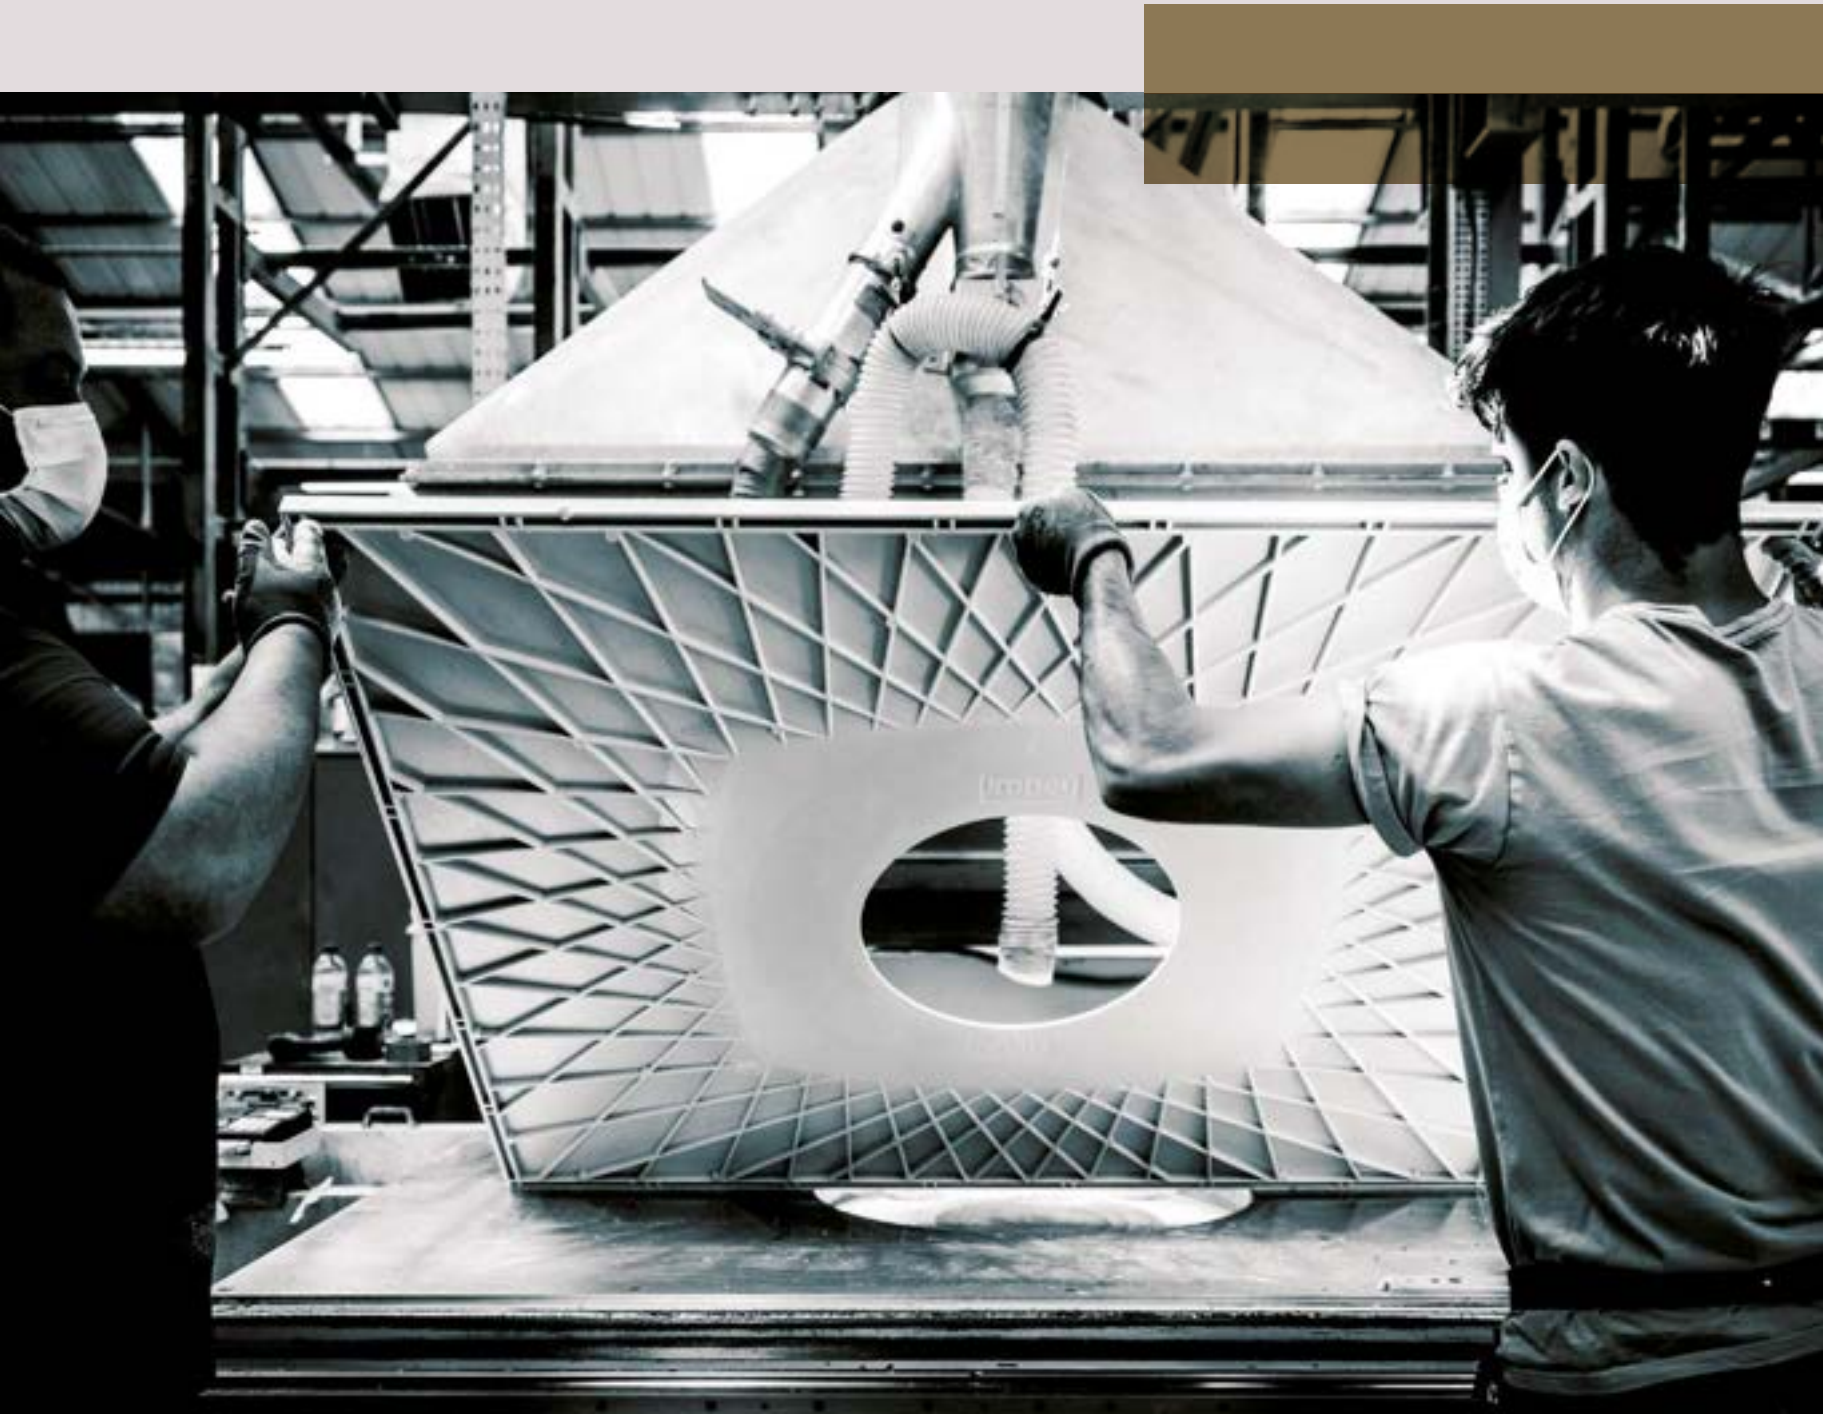

Proud UK-based manufacturer

As a UK-based manufacturer, we are proud to employ a locally based workforce at our manufacturing site in Bridgnorth, Shropshire, and our offices in Ilton, Somerset.

At our Bridgnorth factory, we bring together design, engineering, testing and modern manufacturing processes to produce high-quality showering solutions efficiently, responsibly and with care.

As part of Coram UK, Impey is committed to making better choices across product design, manufacturing and operations. From durable products and efficient processes to reduced waste, improved packaging and responsible resource use, we are working to lower our impact while maintaining the quality, reliability and care our customers expect.

Our in-house design, engineering and continuous improvement teams support every stage of this work. They help drive new materials, tooling, processes and product development, while ensuring compliance through our dedicated testing facility.

“
Quality products, efficient processes and continuous improvement, all shaped by care for people, places and the future.



Impey cares

Innovation, care and confidence built into every solution

Impey was founded on a simple idea: accessible showering should work better. That belief still drives us today.

We innovate with purpose, developing products that solve real installation and accessibility challenges with clarity and precision.

We work collaboratively with Occupational Therapists, local authorities, housing providers, architects, installers, merchants and developers, so our solutions respond to the needs of the people who rely on them.

We also take responsibility for how our products are designed, made and delivered, with a focus on durability, efficient manufacturing, reduced waste and continuous improvement.

And we apply insight at every stage, combining technical knowledge, sector experience and responsible decision-making to deliver products that perform in the real world.

Most importantly, we put people first. We understand that behind every specification, installation or adaptation is a person who needs a safer, more comfortable and more independent way to shower. That is why we approach every product with care, conscientious attention to detail and a commitment to lasting quality.



This is Impey _____
Care that puts people first. Quality you can trust.

Support at every step

We do more than manufacture products. We help our customers deliver better showering environments with confidence.

Whether the requirement is a luxury wetroom, a practical bathroom adaptation or a large-scale specification project, Impey supports customers with products and expertise shaped around real-world demands. Our range is backed by technical guidance, specification support, CAD drawings, installation resources, training and aftersales help, making it easier to move from concept to completion with clarity.

As a UK manufacturer, we bring together design, engineering, testing and continuous improvement to maintain high standards of consistency, safety and performance. The result is a portfolio of inclusive showering solutions trusted across sectors, and a team committed to helping every project work as it should.



This is Impey

Accessible showering, expertly designed for every user, every installer and every environment.

Bespoke Services

Tailored showering solutions for specialist spaces

Every project has its own requirements. From care and retirement environments to hotels, hospitality settings and complex residential specifications, Impey supports customers with bespoke showering solutions designed around the space, the user and the installation.

Our in-house design, engineering and technical teams work closely with customers to develop practical, reliable solutions for real project demands. Whether the requirement is for bespoke wetroom floors, tailored drainage, vinyl or tiled floor compatibility, CAD support or specification guidance, we help bring each project together with clarity and confidence.

As a UK manufacturer, we combine technical expertise with responsive project support, helping customers move from brief to finished installation more smoothly. Our experience across accessible showering, wetroom design and specialist environments means every bespoke solution is shaped with care, precision and long-term performance in mind.


“
We combine technical expertise with responsive project support, helping customers move from brief to finished installation more smoothly

Bespoke support can include:

- Bespoke wetroom floors and drainage
- Vinyl and tiled floor solutions
- Design, engineering and testing expertise
- CAD, DWG and BIM support
- Technical field support
- Project and customer support teams
- Specification guidance
- Award winning designs
- Best in class wetroom tanking solutions
- High quality sustainable materials
- Competitive pricing
- CPD training
- Flexible delivery support



Bespoke linear drainage

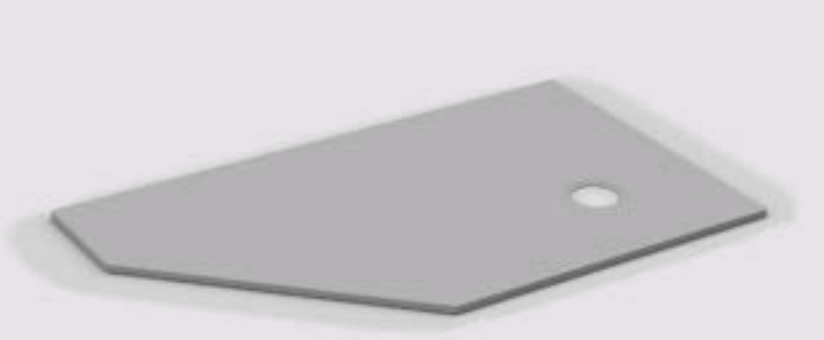

Bespoke wetroom floor former



Bespoke bathroom floor design

Awards

- Impey KBB Product Innovation Awards 2005
- Impey Accessible Showering ‘Best In Show’ – 2012
- iF Design Award - Geesa Haiku - 2012
- Impey Cares - CSR Campaign - 2013
- iF Design Award - Geesa Tone - 2015
- Architects Journal ‘bespoke linear wetroom’ - 2019
- iF Design Award - Geesa Frame - 2019
- Build-It-Awards - EasyFit Wetroom Former - 2019
- Build-It-Awards - Aqua-Grade Wetroom Former - 2021



This is Impey

Bespoke showering solutions, shaped with care, precision and confidence.



Contents

The Bathroom Collection

Wetroom Floor Formers & Drainage	Page 24
Waterproofing & Underfloor Heating	Page 62
Wetroom Glass Screens & Doors	Page 70
GEESA Bathroom Accessories	Page 80

The Adaptive Collection

Wetroom Floor Formers & Drainage	Page 108
Shower Trays & Drainage	Page 122
Half Height Doors, Curtains, Rails, Glass Screens & Doors	Page 140
Shower Seats & Benches	Page 166
Showers & Pumps	Page 176
Grabrails, Handrails & Accessories	Page 190
Healthcare Toilet and Bathroom Accessories	Page 204

Your space. Your way.

Designed around how you live

A beautiful bathroom should do more than look impressive. It should feel effortless to use, thoughtfully planned and built to last. Impey creates elegant, contemporary wetroom spaces designed around how you live, bringing together refined design, trusted performance and decades of innovation.

Clean lines, level-access design and considered detailing work in harmony with dependable drainage, precision engineering and technical expertise to create spaces that feel open, spacious and comfortable every day. Each solution is shaped by real homes and real needs, delivering bathrooms that are as practical as they are beautifully resolved.

For homeowners, that means inspiration with certainty - spaces that are inspiring to create and effortless to enjoy, with the reassurance of Impey's expertise in accessible showering. Behind every product is pioneering engineering, trusted UK manufacturing and deep technical understanding, supporting everything from design-led family bathrooms to premium ensembles and future-ready renovations.

Impey brings every vision to life with confidence, creating showering spaces that are made to be lived in and enjoyed for years to come.



This is Impey

Effortless style. Everyday comfort. Complete confidence.



Wetroom Floor Formers & Drainage

One brand. One complete floor former family

For more than 25 years, Impey has been shaping the future of level-access showering. From pioneering the first EasyFit floor former with a built-in gradient to expanding the range with contemporary linear solutions, our Dec family has been developed to make wetrooms easier to specify, easier to install and more reliable to use.

LINEAR FLOOR FORMERS & DRAINAGE

		Aqua-Dec Linear 1	Page 30
		Aqua-Dec Linear 2	Page 32
		Aqua-Dec Linear 3	Page 34
		Aqua-Dec Linear 4	Page 36
		Aqua-Grade Linear	Page 38
		Tiled Linear Wetroom Drainage	Page 42
		Tiled Linear Wetroom Drain Tops	Page 44

EASYFIT, SOLIDFIT & AQUA-GRADE FLOOR FORMERS & DRAINAGE

		Aqua-Dec EasyFit	Page 46
		SolidFit Floor Formers	Page 50
		Aqua-Grade	Page 52
		Tiled Wetroom Drainage	Page 54
		Tiled Wetroom Drain Tops	Page 56
		Vinyl Central Drain	Page 60



Suitable for timber floors



Suitable for concrete floors

Innovation in Every Dec

Why Impey leads the way

Impey defined the modern wetroom by introducing a smarter way to create level-access showering. Our EasyFit Dec was developed to simplify installation while delivering the dependable drainage performance that specifiers, installers and end users can trust.

That innovation set the foundation for the Impey floor former range. EasyFit quickly became the proven choice for versatile wetroom design, combining practical on-site flexibility with the reassurance of a system engineered for long-term performance.

As wetroom design evolved, so did our range. Building on the success of EasyFit, we developed a broader family of Decs to answer different layout, drainage and design requirements. That included the introduction of our linear floor formers, giving customers more choice for contemporary spaces while maintaining the same Impey standards of quality, reliability and installation confidence.

Today, the Impey Dec family brings together trusted performance with flexible design. Whether the priority is adaptability, aesthetic preference or project-specific installation needs, every Dec is engineered to support reliable level-access wetrooms across a wide range of spaces.

“

Our EasyFit Dec was developed to simplify installation while delivering the dependable drainage performance that specifiers, installers and end users can trust.



We even do wetrooms for our best friends.

Aqua-Dec EasyFit


The original innovation that changed wetroom installation

EasyFit was developed to give installers maximum flexibility on site, while making it simpler to achieve a precise, reliable wetroom floor.



With its adaptable format and installer-friendly design, EasyFit helps reduce complexity without reducing performance. It is engineered to be straightforward to position, easier to work with and dependable in the finished installation. For projects where versatility matters, EasyFit is the go-to choice.

Why EasyFit stands out:

- Designed to make installation easier and more intuitive
- Built for reliable level-access performance
- Adaptable to a wide range of wetroom layouts
- Ideal where flexibility on site is important
- Part of a complete Impey wetroom system

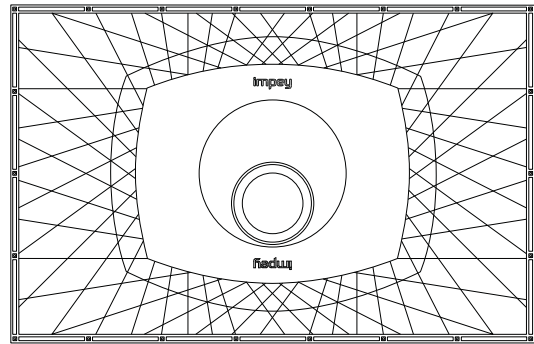

Build It Awards 2019
Best Drainage or Plumbing Product

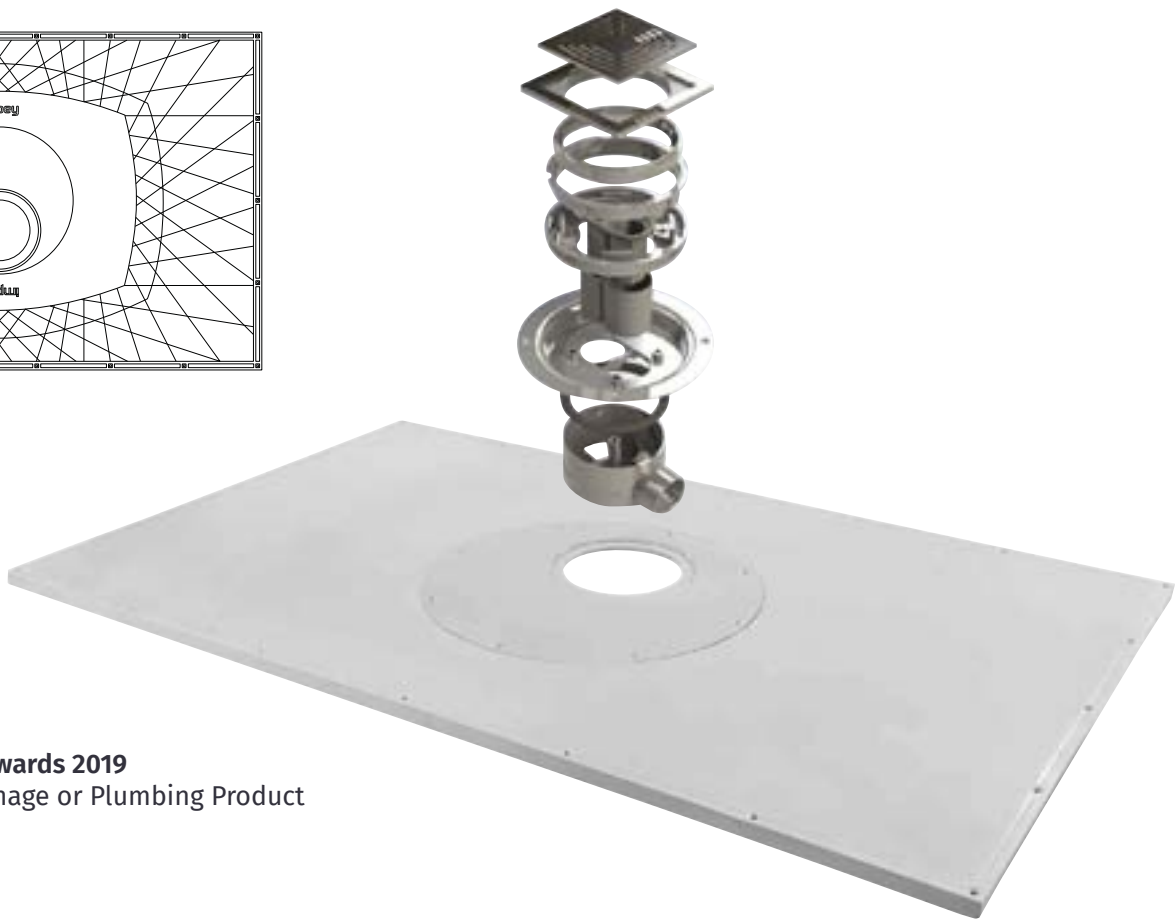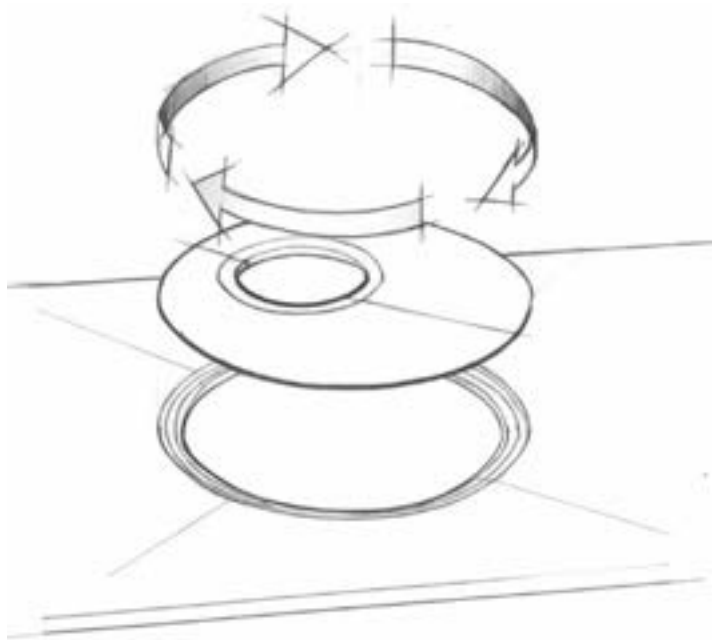

A complete family of Decs

Designed to deliver quality wetrooms across a wide range of spaces

EasyFit is part of something bigger; a complete family of Impey floor formers developed to solve different installation challenges while maintaining the same commitment to quality, drainage performance and ease of specification.

From contemporary linear drainage to robust former options for varying project needs, each Dec has a clear role within the range. Together, they give customers the freedom to choose the best-performing solution for the space, rather than forcing the space to fit the product.

Choose from the Impey floor former family:

Aqua-Dec Linear 1

For clean, contemporary linear drainage layouts.



Aqua-Dec Linear 2

For linear wetrooms where layout simplicity and flexibility are key.



Aqua-Dec Linear 3

For alternative linear drainage positioning and wider design choice.



Aqua-Dec Linear 4

For projects requiring a different linear format within the same trusted Impey system.



Aqua-Grade Linear

For underfloor wetroom applications where a robust solid-floor solution is needed.



Aqua-Dec EasyFit

For maximum adaptability and easier fitting across a wide range of installations.



SolidFit Floor Formers

For dependable performance where a solid, practical former solution is required.



Aqua-Grade

For underfloor wetroom applications where a robust solid-floor solution is needed.



From the first built-in gradient floor former to today's complete family of Decs, Impey continues to lead through purposeful innovation. That means better choice for specifiers, easier installation for fitters and reliable performance for every finished wetroom.

More choice. Easier fitting. Proven performance. That's why Impey remains the brand leader in wetroom floor formers.

Aqua-Dec Linear 1™

Clean lines, minimal tile cuts

Aqua-Dec Linear 1 features a **single gradient** directing water towards a slim linear drain positioned close to the wall. This design reduces grout lines and avoids diagonal tile cuts, creating a clean, modern finish.


Ideal for **corner and alcove installations**, it integrates seamlessly into the surrounding floor for a refined, uncluttered look. Please note where the raised edge(s) meet a wall, the wetroom former must be rebated into the wall(s).

Available in 3 sizes, all Aqua-Dec Linear floor formers have a 1 in 40 gradient on average and a maximum flow rate of **35-40 l/m**.


Key features

- Ideal for corner and alcove installations
- Single gradient for simple tiling layouts
- Minimal grout lines and tile cuts
- 22mm thick
- 800mm linear drain
- Linear drain 50mm from the wall
- Fixed-size former for consistent performance
- Suitable for timber or concrete floors
- Underboarding with 18mm plyboard required
- Two available sump positions to help avoid pipework and joists*

*Please refer to dimensions B and C on the diagram below

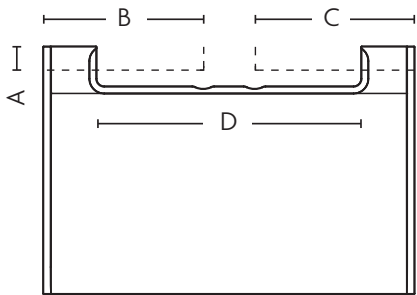

Code	Length	Width	Drain	Drain centre point			
				A	B	C	D
AD1L1280	1200mm	800mm	800mm	76mm	517mm	517mm	854mm
AD1L1210	1200mm	1000mm	800mm	76mm	517mm	517mm	854mm
AD1L1212	1200mm	1200mm	800mm	76mm	517mm	517mm	854mm

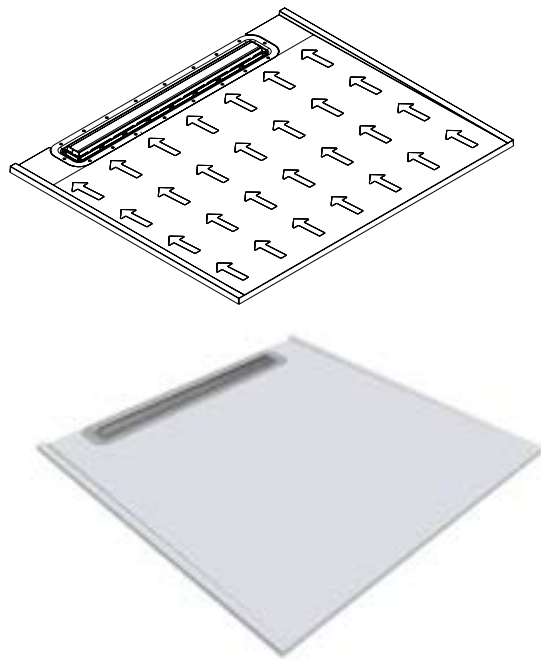

Please note all Impey wetroom floor formers and drains are now sold seperately. Please refer to pages 40-45 to view our compatible drain options.



Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

Aqua-Dec Linear 2™

Alcove-ready, simple installation

Aqua-Dec Linear 2 is designed for **corner or alcove installations**, using two gradients to direct water efficiently towards the drain without requiring diagonal tile cuts.


Now trimmable, it offers additional flexibility on site while maintaining a clean, structured tile layout. Please note where the the raised edge(s) meet a wall, the wetroom former must be rebated into the wall(s).

Available in 4 sizes, all Aqua-Dec Linear floor formers have a 1 in 40 gradient on average and a maximum flow rate of 35-40 l/m.


Key features

- Ideal for corner or alcove installations
- Two gradients leading to the drain
- No diagonal tile cuts required
- 22mm thick
- 600mm linear drain
- Drain positioned 244mm from the wall
- Trimmable (see trimming guidance)
- Suitable for timber or concrete floors
- Underboarding with 18mm plyboard required
- Two available sump positions to help avoid pipework and joists*

*Please refer to dimensions B and C on the diagram below

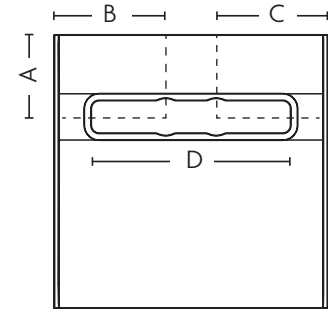

Code	Length	Width	Drain	Drain centre point			
				A	B	C	D
AD2L9090	900mm	900mm	600mm	270mm	367mm	367mm	654mm
AD2L1010	1000mm	1000mm	600mm	270mm	367mm	367mm	654mm
AD2L1290	1200mm	900mm	600mm	270mm	367mm	367mm	654mm
AD2L1490	1400mm	900mm	600mm	270mm	367mm	367mm	654mm

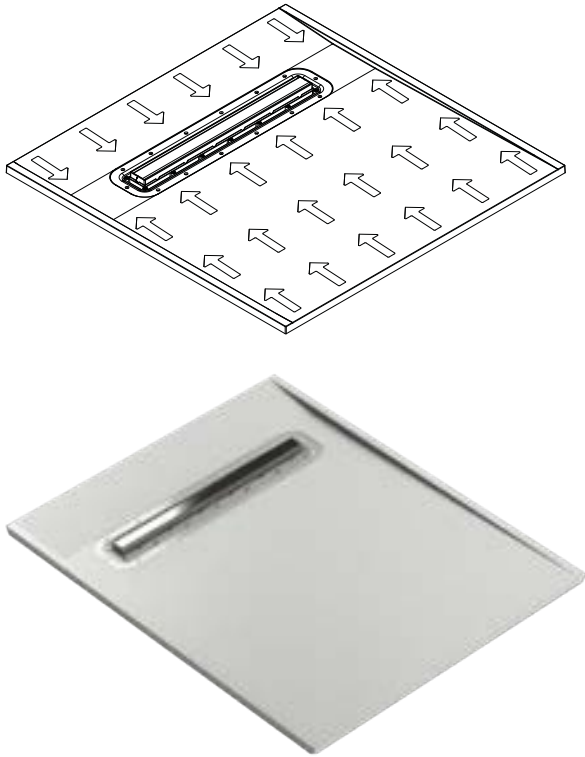

Please note all Impey wetroom floor formers and drains are now sold seperately. Please refer to pages 40-45 to view our compatible drain options.



Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

Aqua-Dec Linear 3™

Designed for open-plan spaces

Aqua-Dec Linear 3 uses **three gradients** to guide water towards the drain, allowing it to work seamlessly within walk-through and alcove open plan layouts.


Its trimmable design makes it particularly useful where dimensions need fine adjustment, while still delivering strong, reliable drainage performance.

Available in 6 sizes, all Aqua-Dec Linear floor formers have a 1 in 40 gradient on average and a maximum flow rate of 35-40 l/m.

Key features


- Ideal for walk-through and alcove installations
- Three gradients for effective water flow
- 22mm thick
- 800mm linear drain
- Linear drain 50mm from the wall
- Two diagonal tile cuts
- Trimmable (see trimming guidance)
- Suitable for timber or concrete floors
- Underboarding with 18mm plyboard required
- Two available sump positions to help avoid pipework and joists*

*Please refer to dimensions B and C on the diagram below

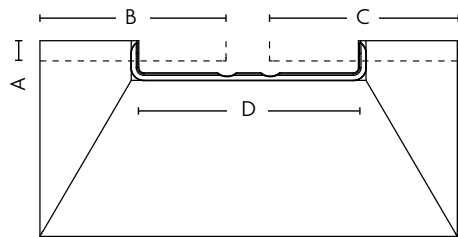

Please note all Impey wetroom floor formers and drains are now sold seperately.
Please refer to pages 40-45 to view our compatible drain options.

Code	Length	Width	Drain	Drain centre point			
				A	B	C	D
AD3L1290	1200mm	900mm	800mm	76mm	517mm	517mm	854mm
AD3L1580	1500mm	800mm	800mm	76mm	667mm	667mm	854mm
AD3L1590	1500mm	900mm	800mm	76mm	667mm	667mm	854mm
AD3L1675	1600mm	750mm	800mm	76mm	717mm	717mm	854mm
AD3L1880	1800mm	800mm	800mm	76mm	817mm	817mm	854mm
AD3L1890	1800mm	900mm	800mm	76mm	817mm	817mm	854mm

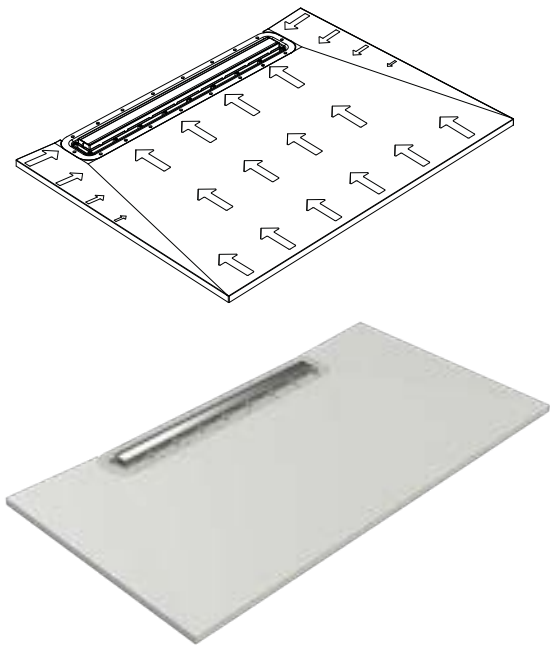

Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

Aqua-Dec Linear 4™

Maximum flexibility, distinctive design

Aqua-Dec Linear 4 is the most versatile option in the Linear range. With **four gradients** and multiple drain width options, it adapts easily to walk-in, walk-through, alcove and corner installations.

Its balanced design naturally draws attention to the linear drain, making it a strong visual feature within the space.

Available in 9 sizes, all Aqua-Dec Linear floor formers have a 1 in 40 gradient on average and a maximum flow rate of 35-40 l/m.



Key features


- Suitable for walk-in, walk-through, corner and alcove layouts
- Four gradients leading to the drain
- 22mm thick
- 600mm or 800mm linear drain options
- Linear drain 194mm from the wall
- Trimmable (see trimming guidance)
- Suitable for timber or concrete floors
- Underboarding with 18mm plyboard required
- Two available sump positions to help avoid pipework and joists*

*Please refer to dimensions B and C on the diagram below



Please note all Impey wetroom floor formers and drains are now sold seperately. Please refer to pages 40-45 to view our compatible drain options.

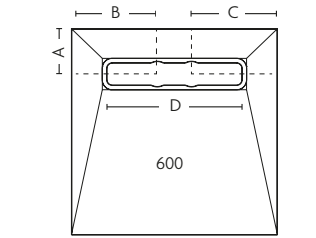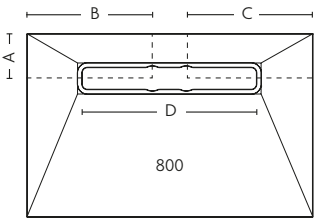					Drain centre point			
Code	Length	Width	Drain		A	B	C	D
AD4L9090	900mm	900mm	600mm		220mm	367mm	367mm	654mm
AD4L1010	1000mm	1000mm	600mm		220mm	417mm	417mm	654mm
AD4L1290	1200mm	900mm	800mm		220mm	517mm	517mm	854mm
AD4L1212	1200mm	1200mm	800mm		220mm	517mm	517mm	854mm
AD4L1490	1800mm	900mm	800mm		220mm	517mm	517mm	854mm
AD4L1690	1800mm	900mm	800mm		220mm	617mm	617mm	854mm
AD4L18105	1800mm	1050mm	800mm		220mm	634mm	634mm	854mm
AD4L2010	2000mm	1000mm	800mm		220mm	817mm	817mm	854mm
AD4L2012	2000mm	100mm	600mm		220mm	917mm	917mm	654mm

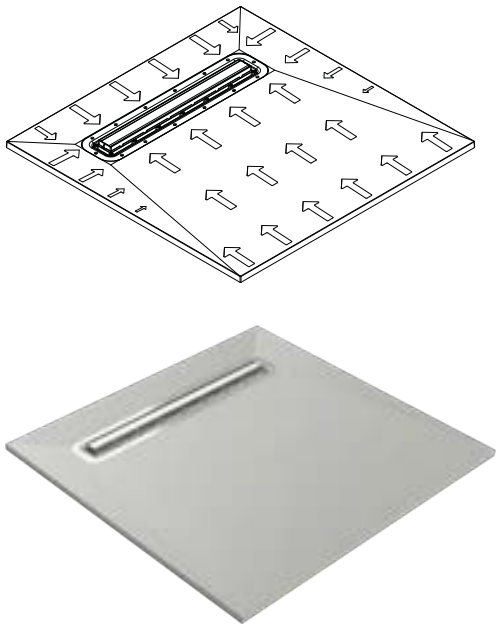

Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

Aqua-Grade Linear

Colour-coded modular sections

Aqua-Grade Linear offers a fast, simple solution for creating the perfect wetroom floor gradient. Suitable for solid concrete floors with a tiled floor finish only. Aqua-Grade Linear can be installed directly onto PIR insulation boards using the insulation mounting feet.

The colour-coded modular sections click together effortlessly to form a matrix, which is then filled with screed to achieve an accurate and reliable fall.

Available in 24 sizes, Aqua-Grade Linear floor formers offer exceptional design flexibility to suit a wide range of installations. Each former features an average gradient of 1 in 40 and a maximum flow rate of 40 l/min, ensuring efficient drainage performance.


Aqua-Grade Linear provides a quick and easy way to create the ideal wetroom floor gradient for concrete solid floors.

Key features





- Precise and quick to install
- Ideal for new-build projects
- Can be installed directly onto insulation boards*
- Guarantees a perfect wetroom floor gradient every time
- Eliminates the risk of water pooling

*when using insulation mounting feet.

Code SCR/IMP

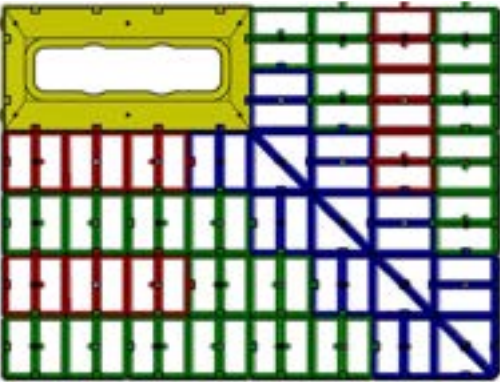

Please note all Impey wetroom floor formers and drains are now sold seperately. Please refer to pages 40-45 to view our compatible drain options.

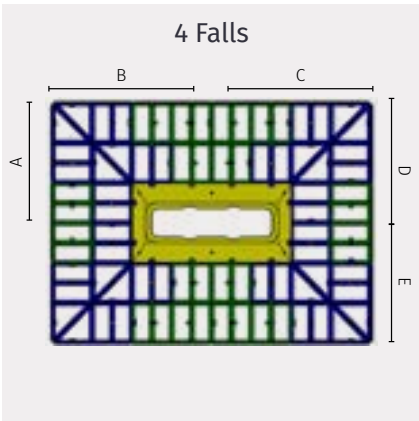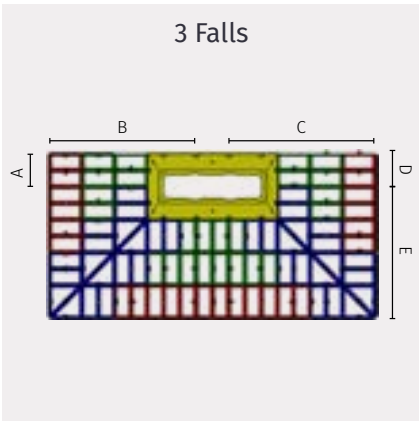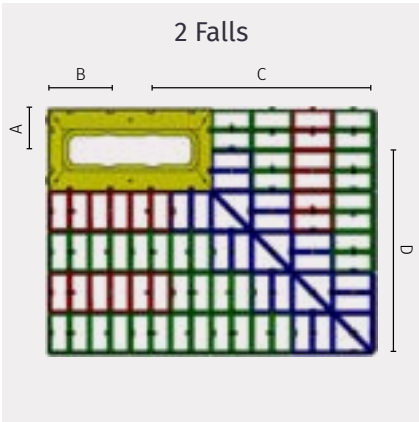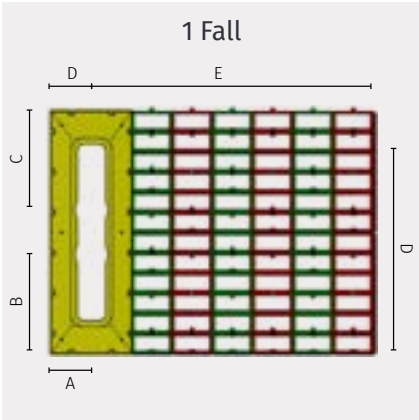

Falls	Drain	Code	Length	Width	Depth	A	B	C	D	E
1 Fall	600mm	AG60L9090/1F	900mm	900mm	62.5mm	150mm	367mm	367mm	150mm	750mm
1 Fall	800mm	AG80L105105/1F	1050mm	1050mm	67.8mm	150mm	442mm	442mm	150mm	900mm
1 Fall	600mm	AG60L12090/1F	1200mm	900mm	73mm	150mm	367mm	367mm	150mm	1050mm
1 Fall	800mm	AG80L120105/1F	1200mm	1050mm	73mm	150mm	442mm	442mm	150mm	1050mm
1 Fall	600mm	AG60L13590/1F	1350mm	900mm	78.2mm	150mm	367mm	367mm	150mm	1200mm
1 Fall	800mm	AG80L135105/1F	1350mm	1050mm	78.2mm	150mm	442mm	367mm	150mm	1200mm
1 Fall	600mm	AG60L15090/1F	1500mm	900mm	83.5mm	150mm	442mm	367mm	150mm	1350mm
1 Fall	800mm	AG80L150105/1F	1500mm	1050mm	83.5mm	150mm	442mm	442mm	150mm	1350mm

Falls	Drain	Code	Length	Width	Depth	A	B	C	D	E
2 Falls	400mm	AG40L12090/2F	1200mm	900mm	62.5mm	150mm	217mm	817mm	750mm	
2 Falls	600mm	AG60L13575/2F	1350mm	750mm	57.3mm	150mm	367mm	817mm	600mm	
2 Falls	400mm	AG40L135105/2F	1350mm	1050mm	67.8mm	150mm	217mm	967mm	1050mm	
2 Falls	800mm	AG80L15075/2F	1500mm	750mm	57.3mm	150mm	442mm	892mm	600mm	
2 Falls	600mm	AG60L15090/2F	1500mm	900mm	52mm	150mm	367mm	967mm	750mm	
2 Falls	400mm	AG40L150120/2F	1500mm	1200mm	57.3mm	150mm	217mm	1117mm	1050mm	
2 Falls	600mm	AG60L165105/2F	1650mm	1050mm	67.7mm	150mm	367mm	1117mm	900mm	

Falls	Drain	Code	Length	Width	Depth	A	B	C	D	E
3 Falls	400mm	AG40L15075/3F	1500mm	750mm	57.3mm	150mm	667mm	667mm	150mm	600mm
3 Falls	600mm	AG60L18075/3F	1800mm	750mm	57.3mm	150mm	817mm	817mm	150mm	600mm
3 Falls	400mm	AG40L18090/3F	1800mm	900mm	62.5mm	150mm	817mm	817mm	150mm	750mm
3 Falls	800mm	AG80L19575/3F	1950mm	750mm	57.3mm	150mm	892mm	892mm	150mm	600mm

Falls	Drain	Code	Length	Width	Depth	A	B	C	D	E
4 Falls	400mm	AG40L12090/4F	1200mm	900mm	52mm	517mm	450mm	450mm	517mm	600mm
4 Falls	600mm	AG60L15090/4F	1500mm	900mm	52mm	667mm	450mm	450mm	667mm	600mm
4 Falls	400mm	AG40L150120/4F	1500mm	1200mm	57.3mm	667mm	600mm	600mm	667mm	750mm
4 Falls	800mm	AG80L16590/4F	1650mm	900mm	51.9mm	742mm	450mm	450mm	742mm	600mm
4 Falls	600mm	AG60L180120/4F	1800mm	1200mm	57.3mm	817mm	600mm	600mm	817mm	600mm

For advice and technical support, please contact our Technical Team on **01460 256080**. For installation guidance, please refer to the fitting instructions included in the pack or **scan the QR code opposite** to view our installation video.



Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

Linear Floor Former and Drain Compatibility Guide

Selecting the correct Linear drain for your Linear floor former is simple with this compatibility chart. Use the table below to identify which 400mm, 600mm or 800mm Linear drain options are compatible with each floor former size, ensuring the correct specification for every wetroom installation.



For advice and support please contact the Impey technical team on **01460 256080** or visit **[impeyshowers.com](https://www.impeyshowers.com)**



		Linear Drain Size		
Linear Former Range	Linear Former Size (mm)	400mm	600mm	800mm
Linear 1	1200 x 800			●
	1200 x 1000			●
	1200 x 1200			●
Linear 2	900 x 900		●	
	1000 x 1000		●	
	1200 x 900		●	
	1400 x 900		●	
Linear 3	1200 x 900			●
	1500 x 800			●
	1500 x 900			●
	1600 x 750			●
	1800 x 800			●
	1800 x 900			●
Linear 4	900 x 900		●	
	1000 x 1000		●	
	1200 x 900			●
	1200 x 1200			●
	1400 x 900			●
	1600 x 900			●
	1800 x 1050			●
	2000 x 1000			●
	2000 x 1200		●	
Aqua Grade Linear 1 Fall	900 x 900		●	
	1050 x 1050			●
	1200 x 900		●	
	1200 x 1050			●
	1350 x 900		●	
	1350 x 1050			●
	1500 x 900		●	
Aqua Grade Linear 2 Falls	1500 x 1050			●
	1200 x 900	●		
	1350 x 750		●	
	1350 x 1050	●		
	1500 x 750			●
	1500 x 900		●	
	1500 x 1200	●		
Aqua Grade Linear 3 Falls	1650 x 1050		●	
	1500 x 750	●		
	1800 x 750		●	
	1800 x 900			●
Aqua Grade Linear 4 Falls	1950 x 750			●
	1200 x 900	●		
	1500 x 900		●	
	1500 x 1200	●		
	1650 x 900			●
	1800 x 1200		●	

Aqua-Dec Linear Drainage

Drainage specification

Aqua-Dec Linear offers a complete drainage solution engineered for performance, flexibility and design freedom. Available in 400mm, 600mm and 800mm apertures to suit your Linear wetroom floor former.

The drain outlet is offset allowing the drain to be rotated 180° at installation, the outlet is also fully rotatable allowing 360° waste positioning to avoid any potential obstacles such as joists and pipework.

All systems are tested to relevant standards, delivering dependable flow rates of 35–40l/min depending on configuration.

Key features

- 400mm, 600mm and 800mm finished drain top options
- Horizontal and vertical gravity outlet options
- 180° rotatable drain channel to avoid pipework and joists
- 360° rotatable outlet for flexible pipe alignment
- Integrated membrane clamp for a secure, watertight seal
- 50mm water seal prevents odours escaping from the drainage system
- Easy-clean design with specially designed hook and removable dip tube and bucket
- Tested in accordance with EN 1253




For advice and support please contact the Impey technical team on **01460 256080** or visit **impeyshowers.com**

400mm Linear Drain

Compatible Drain Options:


- **Element** – Brushed Stainless Steel  Adjustable drain height 6-26mm.
- **Tiled Insert** – 13mm fixed height.



600mm Linear Drain

Compatible Drain Options:


- **Element** – Brushed Stainless Steel, Brushed Gold & Brushed Black.    Adjustable drain height 6-26mm.
- **Tiled Insert** – 13mm or 24mm fixed height.
- **Mirage** - Polished Stainless Steel & Black Metallic Glass.   13mm fixed height.
- **Designer** - Connect Brushed Stainless Steel & Morse Brushed Stainless Steel.   Adjustable drain height 6-26mm.

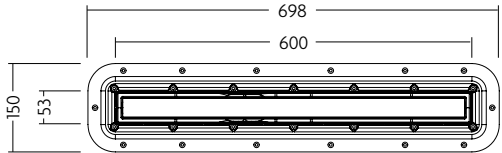

800mm Linear Drain


Compatible Drain Options:

- **Element** – Brushed Stainless Steel, Brushed Gold & Brushed Black.    Adjustable drain height 6-26mm.
- **Tiled Insert** – 13mm or 24mm fixed height.
- **Mirage** - Polished Stainless Steel & Black Metallic Glass.   13mm fixed height.
- **Designer** - Connect Brushed Stainless Steel & Morse Brushed Stainless Steel.   Adjustable drain height 6-26mm.

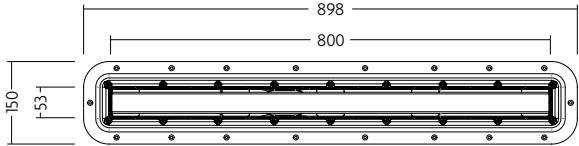


For our range of Aqua-Dec Linear Drain Options please see pages xx. Sketches not to scale.

Horizontal Outlet

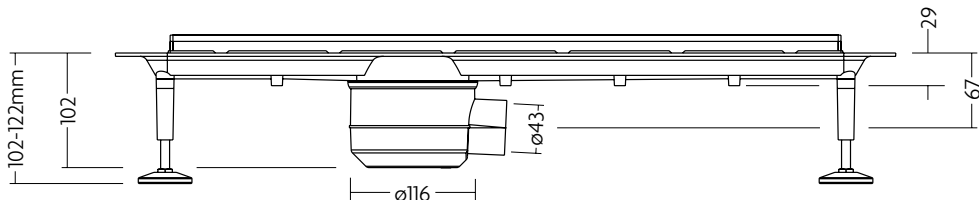

Vertical Outlet

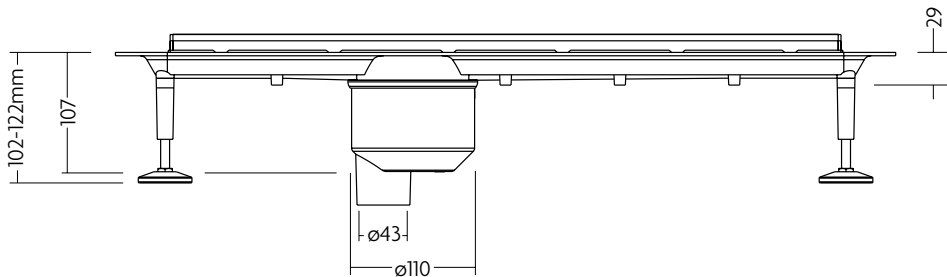

Aqua-Dec Linear Drainage

Designed to complement your space

Impey offers a range of linear drain tops to personalise your wetroom, from discreet tiled inserts to statement colours and finishes. Each drain top is manufactured from 304-grade stainless steel and is available in adjustable or fixed heights to integrate cleanly with the floor finish.

Designed to elevate the visual impact of the drainage feature while maintaining performance consistency.

Linear Element

The Impey Linear Element collection is available in Brushed Stainless Steel, Brushed Gold and Brushed Black. These brushed finishes offer subtle, contemporary styling, with adjustable height for a precise fit. Advanced PVD coating* introduces greater choice in colour and finish, making it easier to coordinate with brassware and accessories.



Brushed
Stainless Steel



Brushed
Gold



Brushed
Black

Linear Tiled Insert

Our Linear Tiled Inserts create a near-invisible finish for a clean, minimalist look. Available with a 13mm or 24mm fixed height from the Linear dec to the top of the tiling frame.




Linear Tiled Insert

*Please note - coloured finishes are not covered under our Lifetime Warranty.

Mirage

The Mirage range is available in Black Metallic Glass, with a subtle shimmer, or Polished Stainless Steel for a timeless contemporary finish. These refined, reflective drain tops have a 13mm fixed height from the Linear dec to the top of the tiling frame.

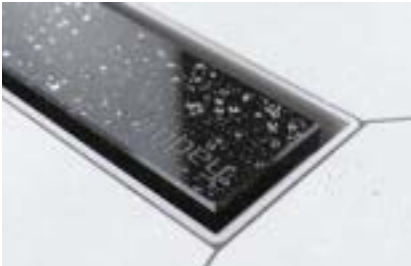

Black Metallic Glass



Polished Stainless Steel

Designer

The Impey Designer range features stainless steel drain tops in Connect and Morse patterns. Adjustable drain height from 6-26mm.



Connect
Brushed



Morse
Brushed

Linear Element	Waste	Drain	Code Horizontal	Code Vertical
Brushed Stainless Steel	Gravity	400mm	LNR40SBSS/H	LNR40SBSS/V
Brushed Stainless Steel	Gravity	600mm	LNR60SBSS/H	LNR60SBSS/V
Brushed Stainless Steel	Gravity	800mm	LNR80SBSS/H	LNR80SBSS/V
Brushed Gold	Gravity	600mm	LNR60SBSS-01/H	LNR60SBSS-01/V
Brushed Gold	Gravity	800mm	LNR80SBSS-01/H	LNR80SBSS-01/V
Brushed Black	Gravity	600mm	LNR60SBSS-02/H	LNR60SBSS-02/V
Brushed Black	Gravity	800mm	LNR80SBSS-02/H	LNR80SBSS-02/V

Tiled Insert	Waste	Drain	Code Horizontal	Code Vertical
13mm	Gravity	400mm	LNR40T13/H	LNR40T13/V
13mm	Gravity	600mm	LNR60T13/H	LNR60T13/V
13mm	Gravity	800mm	LNR80T13/H	LNR80T13/V
24mm	Gravity	600mm	LNR60T24/H	LNR60T24/V
24mm	Gravity	800mm	LNR80T24/H	-


Mirage	Waste	Drain	Code Horizontal	Code Vertical
Polished Stainless Steel	Gravity	600mm	LNR60SPSS/H	LNR60SPSS/V
Polished Stainless Steel	Gravity	800mm	LNR80SPSS/H	LNR80SPSS/V
Black Metallic Glass	Gravity	600mm	LNR60BMG/H	LNR60BMG/V
Black Metallic Glass	Gravity	800mm	LNR80BMG/H	LNR80BMG/V

Designer	Waste	Drain	Code Horizontal	Code Vertical
Connect Brushed Stainless Steel	Gravity	600mm	LNR60CONBSS/H	LNR60CONBSS/V
Connect Brushed Stainless Steel	Gravity	800mm	LNR80CONBSS/H	LNR80CONBSS/V
Morse Brushed Stainless Steel	Gravity	600mm	LNR60MORBSS/H	LNR60MORBSS/V
Morse Brushed Stainless Steel	Gravity	800mm	LNR80MORBSS/H	LNR80MORBSS/V

Please note – The Impey and GEESA Brushed Gold finish is equivalent to the Brushed Brass finish commonly recognised in the UK market.



Aqua-Dec EasyFit™



Award-winning innovation that revolutionised the UK wetroom market

- Patented 360° drain positioning for complete freedom on site
- Designed to help avoid joists and services
- A smarter way to create a level-access wetroom
- 22mm thick, designed as a direct replacement for standard floorboards
- Trimmable - most customisable on the market
- Suitable for timber or concrete floors
- Suitable for tiled and vinyl finishes
- Available in a wide range of sizes
- Complete the system with WaterGuard for a Lifetime Watertight Guarantee



Build It Awards 2019
Best Drainage or Plumbing Product

Reliable performance, easier fitting



Aqua-Dec EasyFit™

One floor former, designed to adapt

Aqua-Dec EasyFit is Impey’s most versatile floor former, designed to suit **almost any wetroom configuration**. Its patented **360° rotating central drain** allows installers to work around joists, services and structural constraints with ease.

Designed as a direct replacement for standard floorboards, EasyFit sits flush within timber or recessed into concrete floors — creating a level-access wetroom suitable for both tiled and vinyl finishes.


EasyFit delivers consistent performance without locking the design into a fixed layout — making it ideal for new build, refurbishment and adaptation projects.

Available in 12 sizes, all Aqua-Dec EasyFit floor formers have a 1 in 40 gradient on average and a maximum flow rate of **36 l/m**.



Key features

- Four pre-formed drainage gradients
- Central 360° rotating drain plate with built-in gradient
- 22mm thick to match standard floorboards
- Tested to support loads of up to 300kg (47 stone)
- Lightweight, strong construction
- Trimmable up to smooth central area, see datasheet
- Suitable for tiled or vinyl floors
- Suitable for timber or concrete floors
- No under boarding required for joists centres of 415mm or less*
- Can be cut with a diamond cutting blade

* Underboarding with 18mm plyboard required for joist centres greater than 415mm

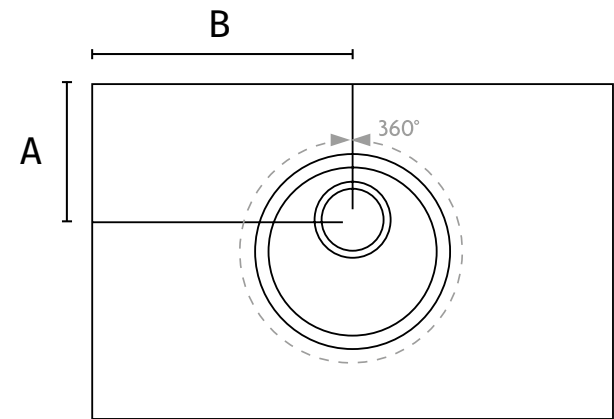

Award winning 360° rotating drain that revolutionised the wetroom market in the UK.

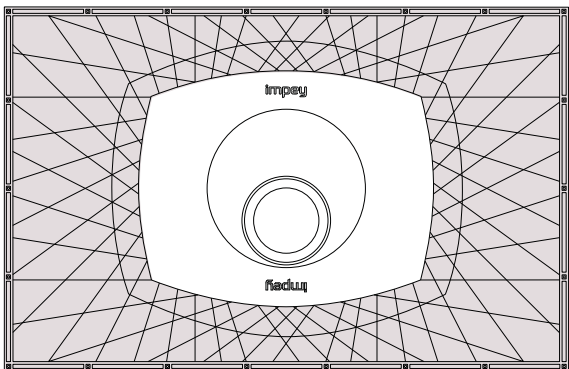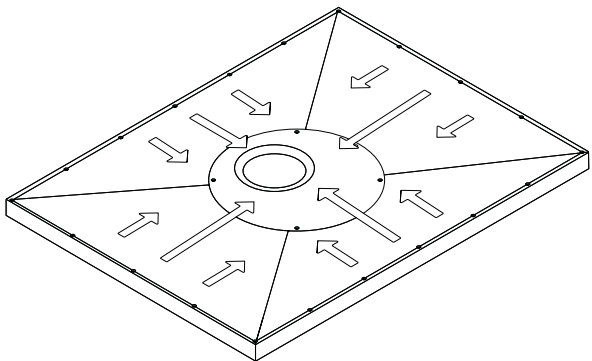

Trimmable area is shown in grey.

Lightweight, strong construction

Central 360° rotating drain plate

i Please note all Impey wetroom floor formers and drains are now sold seperately.
Please refer to pages 54-59 to view our compatible drain options.

22mm thick to match standard floorboards

Code	Length	Width	Adjustable Drain Plate	
			A	B
ADE8080GRY	800mm	800mm	320mm to 480mm	320mm to 480mm
ADE9090GRY	900mm	900mm	370mm to 530mm	370mm to 530mm
ADE1010GRY	1000mm	1000mm	420mm to 580mm	420mm to 580mm
ADE1275GRY	1200mm	750mm	295mm to 455mm	520mm to 680mm
ADE1290GRY	1200mm	900mm	370mm to 530mm	520mm to 680mm
ADE1212GRY	1200mm	1200mm	520mm to 680mm	520mm to 680mm
ADE1380GRY	1300mm	800mm	320mm to 480mm	570mm to 730mm
ADE1490GRY	1400mm	900mm	370mm to 530mm	620mm to 780mm
ADE1580GRY	1500mm	800mm	320mm to 480mm	670mm to 830mm
ADE1512GRY	1500mm	1200mm	520mm to 680mm	670mm to 830mm
ADE1775GRY	1700mm	750mm	295mm to 455mm	770mm to 930mm
ADE18590GRY	1850mm	900mm	370mm to 530mm	845mm to 1005mm



Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK



Build It Awards 2019 Best Drainage or Plumbing Product

SolidFit™ Floor Former

Reliable, adaptable, built for every space

The SolidFit™ Wetroom System combines a high-performance floor former, advanced drainage and proven waterproofing to deliver safe, durable, level-access showering in both residential and commercial environments. SolidFit™ brings together strength, flexibility and installation simplicity, backed by trusted product innovation and national technical support.


The SolidFit™ former delivers long-life performance with smart installer-led features. SolidFit™ can be installed on timber floors (with under-boarding) or recessed into solid floors, making it ideal for adaptations, refurbishments, new builds and care environments.

Key features

- 22mm profile for true level-access
- Simple, fast installation
- 4-way built-in gradient for fast drainage
- Cut-to-size installation flexibility
- Solid construction for high-load environments
- Works with both tiled and vinyl floors
- Offset/central waste design for easy pipe alignment
- 50mm perimeter for secure enclosure sealing
- Suitable for concrete and wooden floors



For advice and support,
please contact our
Technical Team on
01460 256080 or visit
impeyshowers.com

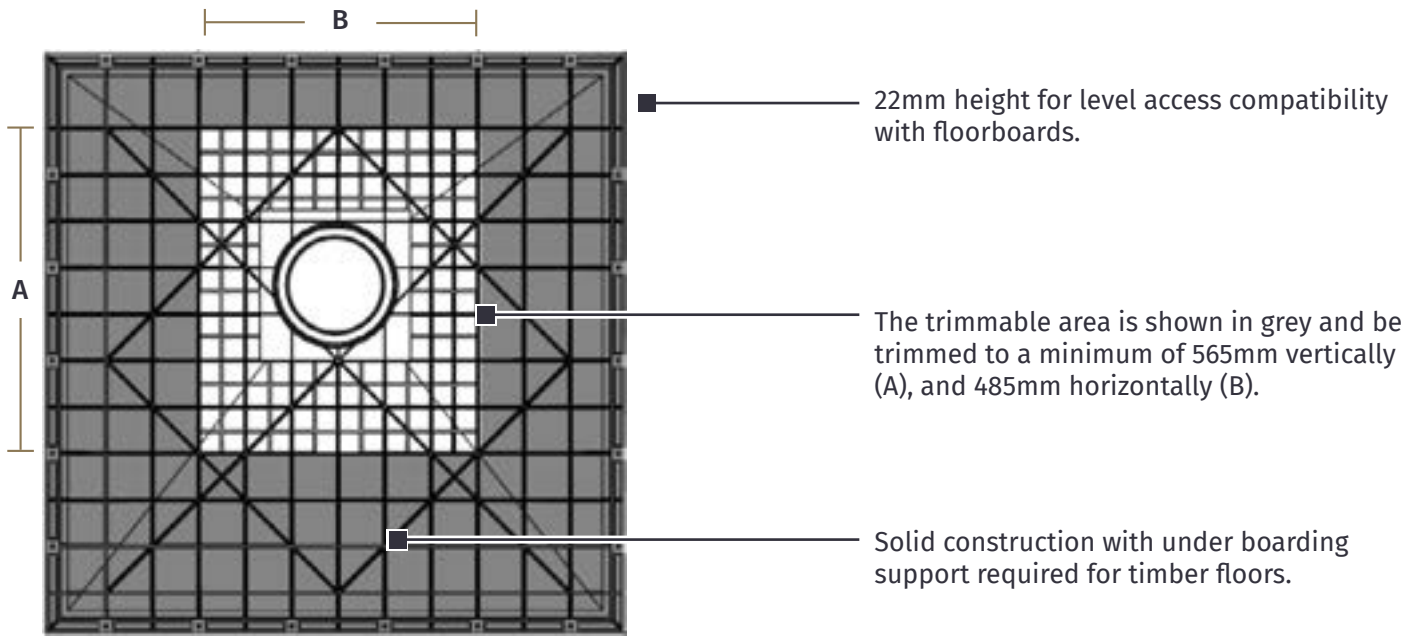

Please note all Impey wetroom floor formers and drains are now sold separately. Please refer to pages 54-59 to view our compatible drain options.



Code	Length	Width	Trimmable Area	
			A	B
SFF1010GRY	1000mm	1000mm	565mm	485mm
SFF1212GRY	1200mm	1200mm	565mm	485mm
SFF1382GRY	1300mm	820mm	565mm	485mm
SFF1582GRY	1500mm	820mm	565mm	485mm



Lifetime Watertight Guarantee when completed with Impey WaterGuard™



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Aqua-Grade

Colour-coded modular sections

Aqua-Grade offers a fast, simple solution for creating the perfect wetroom floor gradient. Suitable for concrete floors with a tiled floor finish only. Aqua-Grade can be installed directly onto PIR insulation boards using the insulation mounting feet.

The colour-coded modular sections click together effortlessly to form a matrix, which is then filled with screed to achieve an accurate and reliable fall.

Available in 10 sizes, Aqua-Grade floor formers offer exceptional design flexibility to suit a wide range of installations. Each former features an average gradient of 1 in 40 and a maximum flow rate of 36 l/min, ensuring efficient drainage performance.

Aqua-Grade provides a quick and easy way to create the ideal wetroom floor gradient for concrete solid floors.




Key features

- Precise and quick to install
- Ideal for new-build projects
- Can be installed directly onto insulation boards*
- Guarantees a perfect wetroom floor gradient every time
- Eliminates the risk of water pooling




Aqua-Grade provides a quick and easy way to create the ideal wetroom floor gradient for concrete solid floors.

*when using insulation mounting feet.

Code SCR/IMP

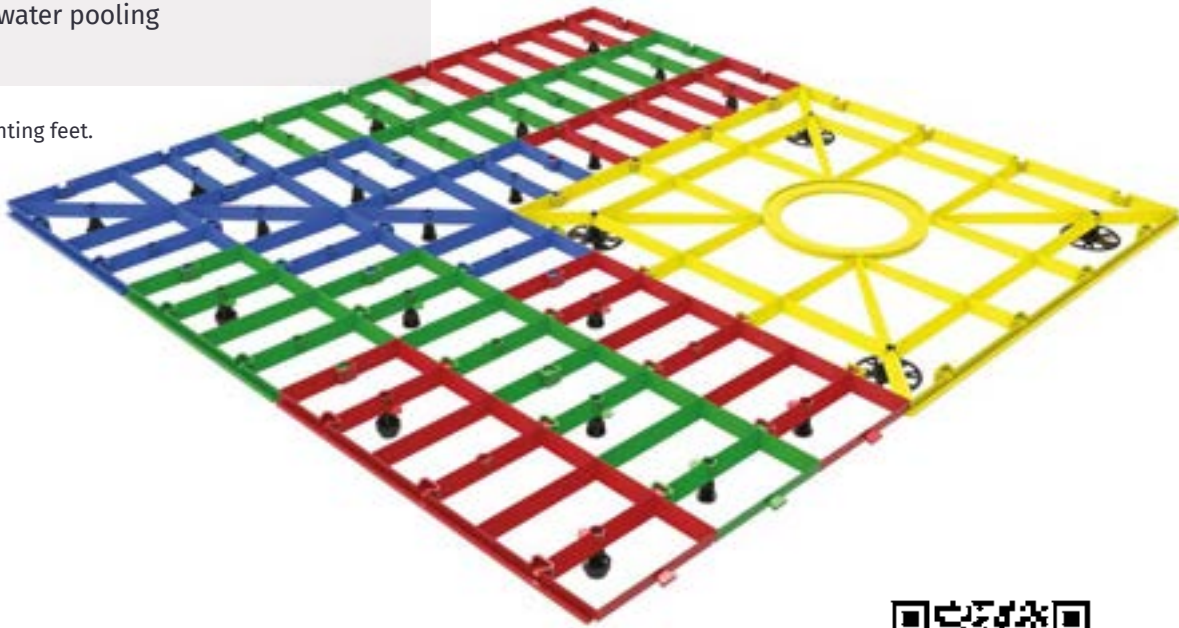

For advice and technical support, please contact our Technical Team on **01460 256080**.
For installation guidance, please refer to the fitting instructions included in the pack or **scan the QR code opposite** to view our installation video.

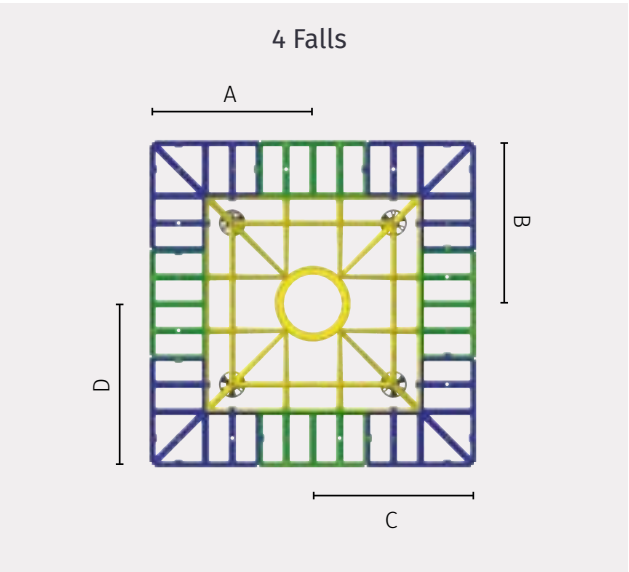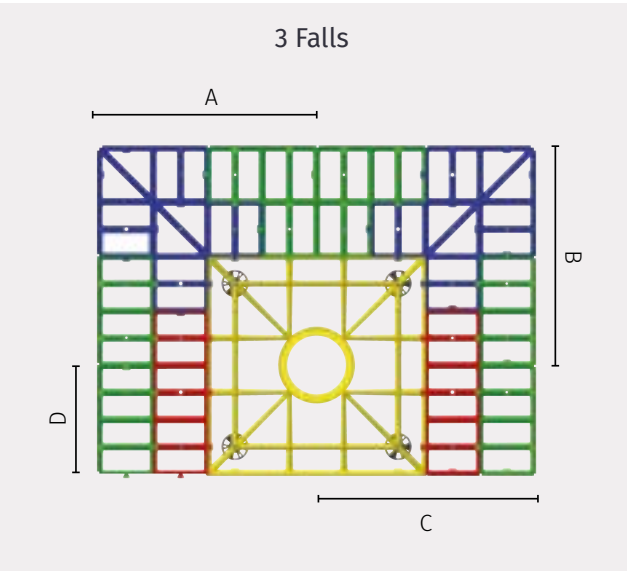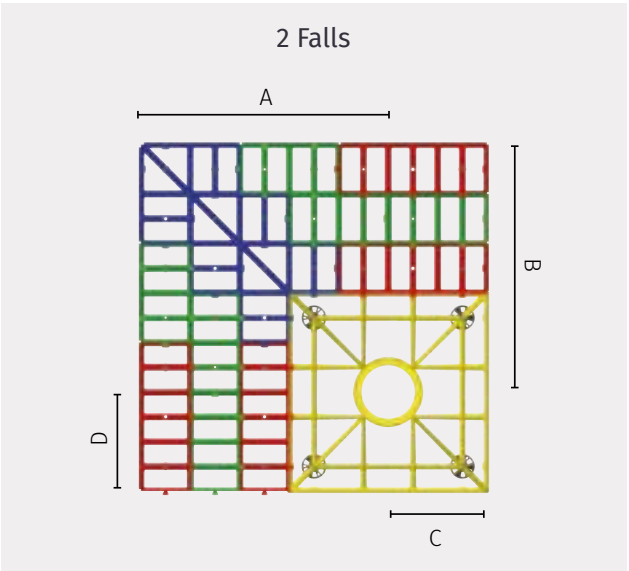

Please note all Impey wetroom floor formers and drains are now sold separately.

Please refer to pages 54-59 to view our compatible drain options.

Falls	Code	Length	Width	Level Grade Depth	A	B	C	D
2 Falls	AG105105/2F	1050mm	1050mm	59.9mm	750mm	750mm	300mm	300mm
2 Falls	AG120120/2F	1200mm	1200mm	65.1mm	900mm	900mm	300mm	300mm
2 Falls	AG135135/2F	1350mm	1350mm	70.3mm	1050mm	1050mm	300mm	300mm
2 Falls	AG150150/2F	1500mm	1500mm	75.6mm	1200mm	1200mm	300mm	300mm
3 Falls	AG12090/3F	1200mm	900mm	54.6mm	600mm	600mm	300mm	600mm
3 Falls	AG150105/3F	1500mm	1050mm	59.9mm	750mm	750mm	300mm	750mm
3 Falls	AG180120/3F	1800mm	1200mm	65.1mm	900mm	900mm	300mm	900mm
4 Falls	AG9090/4F	900mm	900mm	49.4mm	450mm	450mm	450mm	450mm
4 Falls	AG120120/4F	1200mm	1200mm	54.6mm	600mm	600mm	600mm	600mm
4 Falls	AG150150/4F	1500mm	1500mm	59.9mm	750mm	750mm	750mm	750mm



Lifetime Guarantee



Manufactured in the UK

Tiled Wetroom Drainage

Universal Trap for wetrooms


Effective drainage is essential to the performance of any wetroom. Impey drainage solutions are designed to work seamlessly with our floor formers, providing reliable water management across a wide range of installation requirements.

Impey floor formers are available with a choice of Gravity, Pumped and Slimline drainage options, helping you select the right solution for your site conditions.

Impey drainage solutions are designed to integrate seamlessly with all our floor formers, delivering reliable water management across a wide range of installation scenarios.



For advice and support,
please contact our
Technical Team on
01460 256080 or visit
impeyshowers.com

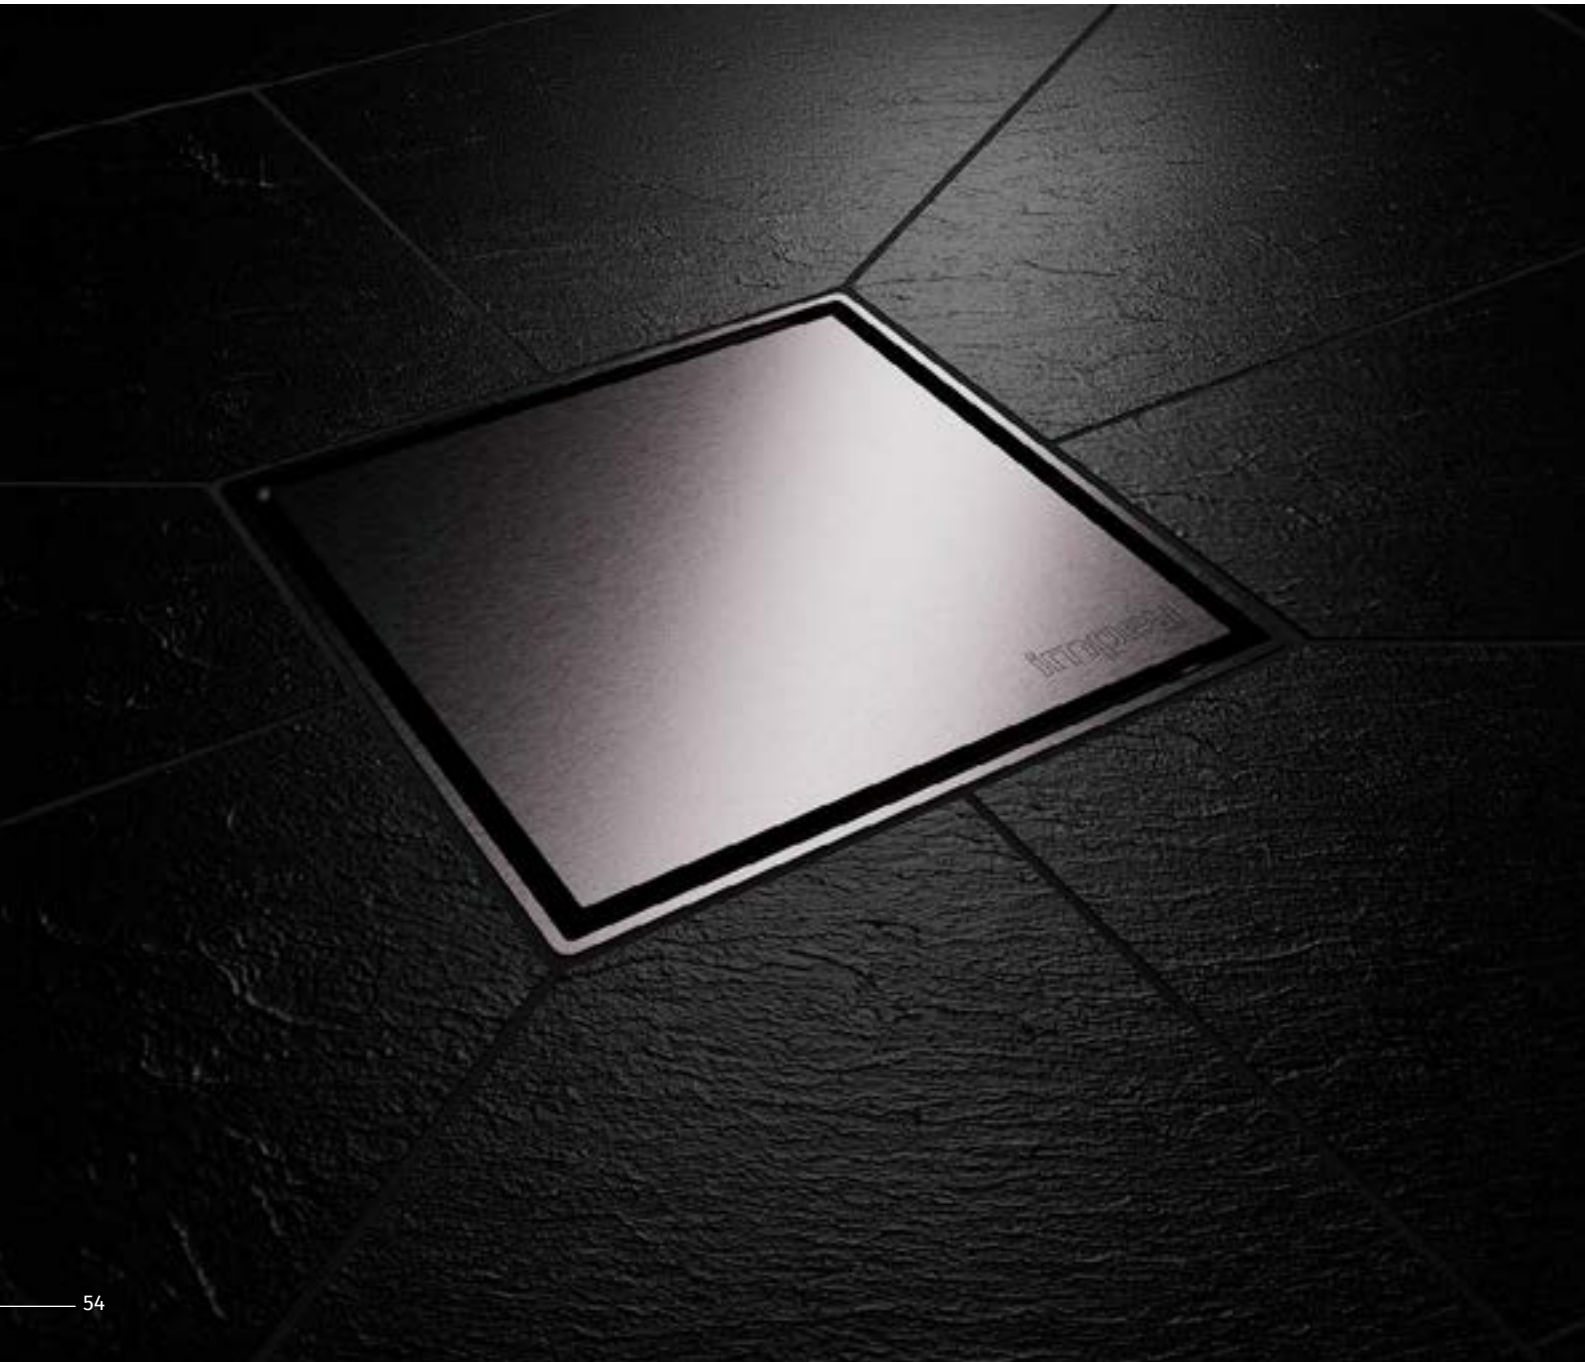

Paragon Pattern
Slot drain top



Quad tiling frame



Removable bucket
• Complete cleaning



Dip tube
• 50mm water seal
• Building regulations conformity



Waterguard clamping ring
• Secures Waterguard



Bowl
• Easy installation 2 piece tray



Sump seal



360° rotating sump
• Available in vertical or horizontal



43mm solvent weld outlet

With Paragon Slot stainless steel
patterned drain top
[UTT01/H](#)


Tiled Wetroom Drainage

Drainage solutions for wetrooms and a variety of shower room scenarios. We provide a comprehensive range of drain types to suit your installation requirements.

Impey’s three main drainage types are:

- Gravity drainage
- Slim+ drainage
- Pumped drainage


Our Gravity, Slim+ and Pumped drains come with a choice of drain top designs and finishes to suit your individual style of wetroom or bathroom.

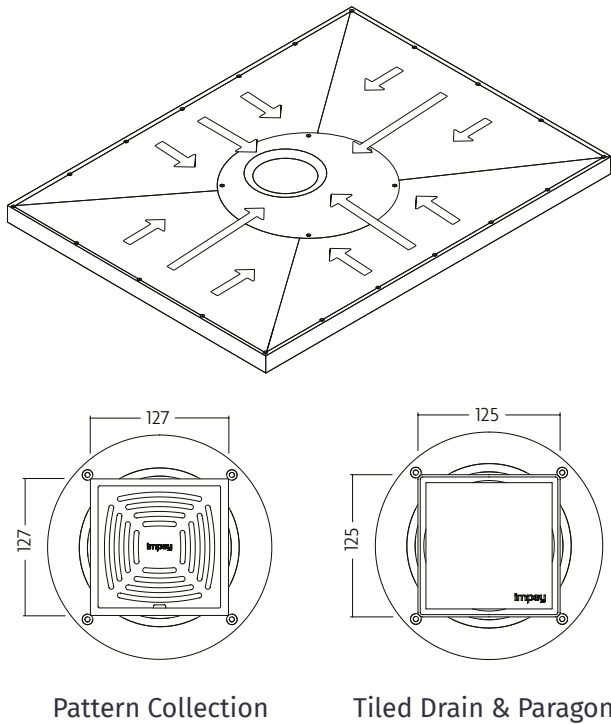

Slim+ Drain

Designed for restricted depth floor structures

- Watertight seal clamp designed to secure WaterGuard membrane
- Patented height adjustment technology between 6-26mm to suit various tile depths
- Flow rate up to 32l/min
- Easy cleaning with specially designed hook and hair trap

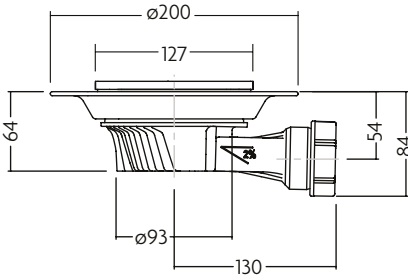

Compatible Drain Options:


- Pattern collection

Gravity Drain


Compatible with all Aqua-Dec floor formers

- Watertight seal clamp designed to secure WaterGuard membrane.
- Patented height adjustment technology between 6-26mm to suit various tile depths in our Paragon Pattern range. Height adjustment for our Tiled Insert and Paragon colour range is 14-24mm.
- Flow rate of 36l/min depending on the drain top.
- 50mm water seal prevents odours escaping from the drainage system
- 43mm solvent weld pipe connection
- Easy cleaning with specially designed hook and removable dip tube and bucket

Horizontal Outlet

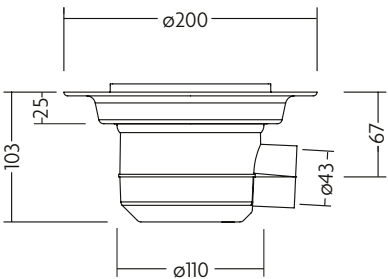


Vertical Outlet

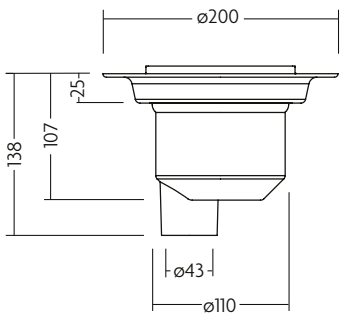

Pumped Drain

Ideal for unbreachable floors

- Watertight seal clamp designed to secure WaterGuard membrane
- Patented height adjustment technology between 6-26mm to suit various tile depths
- Flow rate of 12l/min
- Easy cleaning with specially designed hook
- Must be used with a shower waste pump; where gravity drainage is not an option
- Fully compatible with our Whale pumps.



Impey also supports other drain variants. Please contact our Technical team on 01460 256080 or visit impeyshowers.com

*Please note for vinyl installations, there is no height adjustment. For our range of Aqua-Dec Linear Drain Tops, please see next page. Sketches not to scale.

Paragon

Created for minimalism and customisation, our solid stainless-steel drain tops are **available in a brushed and polished finish**, as well as in our range of colours with PVD coating. Ideally suited to a 10mm tile, but not compatible with mosaic tiles.

Compatible with Gravity drainage. Drains are voluntarily tested to EN 1253.

Brushed


Stainless-steel


Gold


Black

Polished


Stainless-steel



Paragon Pattern

Solid stainless-steel patterned drain tops, available in 5 patterns and in brushed and polished finish. The Pattern collection has a height adjustment of 6-26mm.

Compatible with Gravity, Slim+ and pumped drainage.


Slot


Fibre


Grid


Identity


Stamp

Tiled Insert

The Impey Tiled Insert has a height adjustment of 14-24mm. Ideally suited to a tile thickness of 10mm. Not compatible with mosaic tiles.





Build It Awards 2022

Best Drainage or Plumbing Product

SHORTLISTED

Vinyl Flooring

Our vinyl flooring gravity drainage is available with a choice of chrome or grey ABS plastic cover cap. For our full range of vinyl drain options, refer to page 118.



Paragon Brushed	Waste	Code Horizontal	Code Vertical
Stainless Steel	Gravity	QUADPARB/H	QUADPARB/V
Gold	Gravity	QUADPARB-01/H	QUADPARB-01/V
Black	Gravity	QUADPARB-02/H	QUADPARB-02/V

Paragon Polished	Waste	Code Horizontal	Code Vertical
Stainless Steel	Gravity	QUADPARP/H	QUADPARP/V

Pattern	Waste	Code Horizontal	Code Vertical
Slot	Gravity	QUAD01BSS/H	QUAD01BSS/V
Fibre	Gravity	QUAD02BSS/H	QUAD02BSS/V
Grid	Gravity	QUAD03BSS/H	QUAD03BSS/V
Identity	Gravity	QUAD04BSS/H	QUAD04BSS/V
Stamp	Gravity	QUAD05BSS/H	QUAD05BSS/V

Pattern Slim+	Waste	Code Horizontal	Code Vertical
Slot	Gravity Slim+	SLW2T01/H	-
Fibre	Gravity Slim+	SLW2T02/H	-
Grid	Gravity Slim+	SLW2T03/H	-
Identity	Gravity Slim+	SLW2T04/H	-
Stamp	Gravity Slim+	SLW2T05/H	-

Pumped	Waste	Code Horizontal	Code Vertical
Slot	Pumped	DSS201/H	-
Fibre	Pumped	DSS202/H	-
Grid	Pumped	DSS203/H	-
Identity	Pumped	DSS204/H	-
Stamp	Pumped	DSS205/H	-

Tiled Insert	Waste	Code Horizontal	Code Vertical
Tiled Insert	Gravity	QUADT14/H	QUADT14/V

Please note – The Impey and GEESA Brushed Gold finish is equivalent to the Brushed Brass finish commonly recognised in the UK market.



Use Impey WaterGuard™ waterproof membrane to complete the system and receive our Lifetime Watertight Guarantee



All Drain Tops are made using UK manufactured 304 grade stainless steel

Impey Vinyl Central Drain

A market-first stainless steel drain solution for vinyl wetroom floors

The first drain of its kind, the new **Impey Vinyl Central Drain** brings a premium stainless steel design to vinyl wetroom floors. Available in two top options, with a **brushed stainless steel top** or a **Vinyl Insert top**.

Designed to raise the standard for vinyl drainage, it combines Impey’s trusted clamping technology with a beautifully engineered stainless steel detail, giving installers a proven high-performance drainage solution and customers a cleaner, more refined finish.

Vinyl Central Drain offers a cleaner, more design-led finish for customers who want the practicality of vinyl without compromising the look of their wetroom. For healthcare environments, it delivers the quality, durability and ease of maintenance expected from Impey, with a smooth, accessible finish suited to everyday use.

Key features

- Market-first brushed stainless steel ring with vinyl insert option
- Brushed stainless steel drain solution for vinyl wetroom floors
- Quick and easy to install
- Seamless vinyl floor finish
- Premium brushed stainless steel detail
- Solid 3mm stainless steel top option
- Tried and tested Impey clamping technology
- Solvent-welded assembly
- Suitable across the full range of 2mm wetroom vinyl flooring products
- Easy vertical lift-out access for cleaning
- Designed to help prevent vinyl lifting over time
- Patent pending

Two premium finish options

Brushed Stainless Steel

A 3mm brushed stainless steel top with a premium circular brushed finish, designed to complement the geometry shape.

Vinyl Insert Brushed Stainless Steel Ring


A brushed stainless steel ring frames the Vinyl Insert, creating a seamless appearance across the wetroom floor whilst neatly concealing the edge of the vinyl.



Brushed Stainless Steel



Vinyl Insert Brushed Stainless Steel Ring

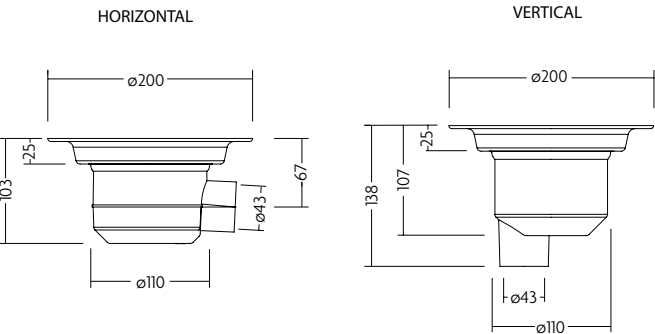

COMING
SOON

Designed around trusted Impey performance

The Impey Vinyl Central Drain uses the same proven clamping approach installers know and trust, helping to create a secure reliable finish, suitable across the full range of 2mm wetroom vinyl flooring products.

The top assembly lifts vertically in and out for straightforward cleaning and maintenance, while the stable cap design supports everyday use, including wheelchair movement across the drain.

Brushed Stainless Steel



Product	Waste	Code Horizontal	Code Vertical
Brushed Stainless Steel	Gravity	UTVSS/H	UTVSS/V
Vinyl Insert Brushed Stainless Steel Ring	Gravity	UTVI/H	UTVI/V

Vinyl Insert Brushed Stainless Steel Ring



Manufactured in the UK



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**



Waterproofing & Underfloor Heating

Waterproofing and underfloor heating help create wetrooms that feel comfortable, perform reliably and stand the test of time. Working beneath the finished surface, they protect the structure of the room, enhance comfort underfoot and support the long-term performance of the complete installation. Impey's solutions are designed to integrate seamlessly with our wetroom systems, delivering confidence from first fix to final finish.

WATERPROOFING

WaterGuard Waterproofing

Page 64

UNDERFLOOR HEATING

Aqua-Mat Underfloor Heating

Page 68

WaterGuard™ Waterproofing

The foundation of a watertight wetroom

WaterGuard™ is Impey’s complete waterproofing solution for tiled wetrooms, featuring a world-class tanking membrane that remains unique in the market.

Designed to work seamlessly with Impey tiled floor formers, WaterGuard™ combines dependable waterproofing with decoupling performance in a slim, self-adhesive 1mm membrane. Fast to install, no drying time, clean to work with and built for long-term reliability, it is ideal for residential and commercial environments.

Key features

- Continuous waterproof barrier
- Decoupling layer to help reduce tile and grout movement
- Protects floors and walls from water and humidity
- Suitable for tiled wetrooms
- Compatible with large format tiles up to 30kg/m²
- Self adhesive
- No drying time required
- Compatible with Aqua-Mat™ underfloor heating up to 60°C
- Certified to DIN EN ISO 9001
- Chemical-free installation



How WaterGuard™ works

A complete system designed to seal the whole wetroom.

WaterGuard™ is designed to protect every vulnerable area within the wetroom, from the floor area itself to joints, corners and service penetrations. Used correctly, it creates a sealed surface ready for tiling and backed by long-term system reliability.

6 easy steps for a watertight wetroom

- 1 Prepare substrate with primer provided, please note formers do not need to be primed
- 2 Protect internal and external corners with preformed corner pieces
- 3 Use jointing tape to seal around the perimeter of the room and wherever two pieces of membrane meet
- 4 Seal service penetrations with WaterGuard™ pipe collars
- 5 Apply WaterGuard™ membrane across the full wetroom floor and specified wall areas
- 6 Apply butyl joint sealant to all joints
- 7 Tile over to complete the system

Coverage guidance

Here’s our quick guide for how to achieve best results with WaterGuard™ coverage.

Mandatory

Floor coverage

Tank the entire wetroom floor to activate the Lifetime Watertight Guarantee. This is the **red zone** illustrated below.

Recommended


Floor + wet area walls

Tank the floor and shower area walls for extended wet zone protection. This is the **red and blue zone** illustrated below.

Highly recommended

Complete coverage

Tank **the full floor** and all walls for maximum protection in high-use and care environments. Adds thermal and acoustic benefits.

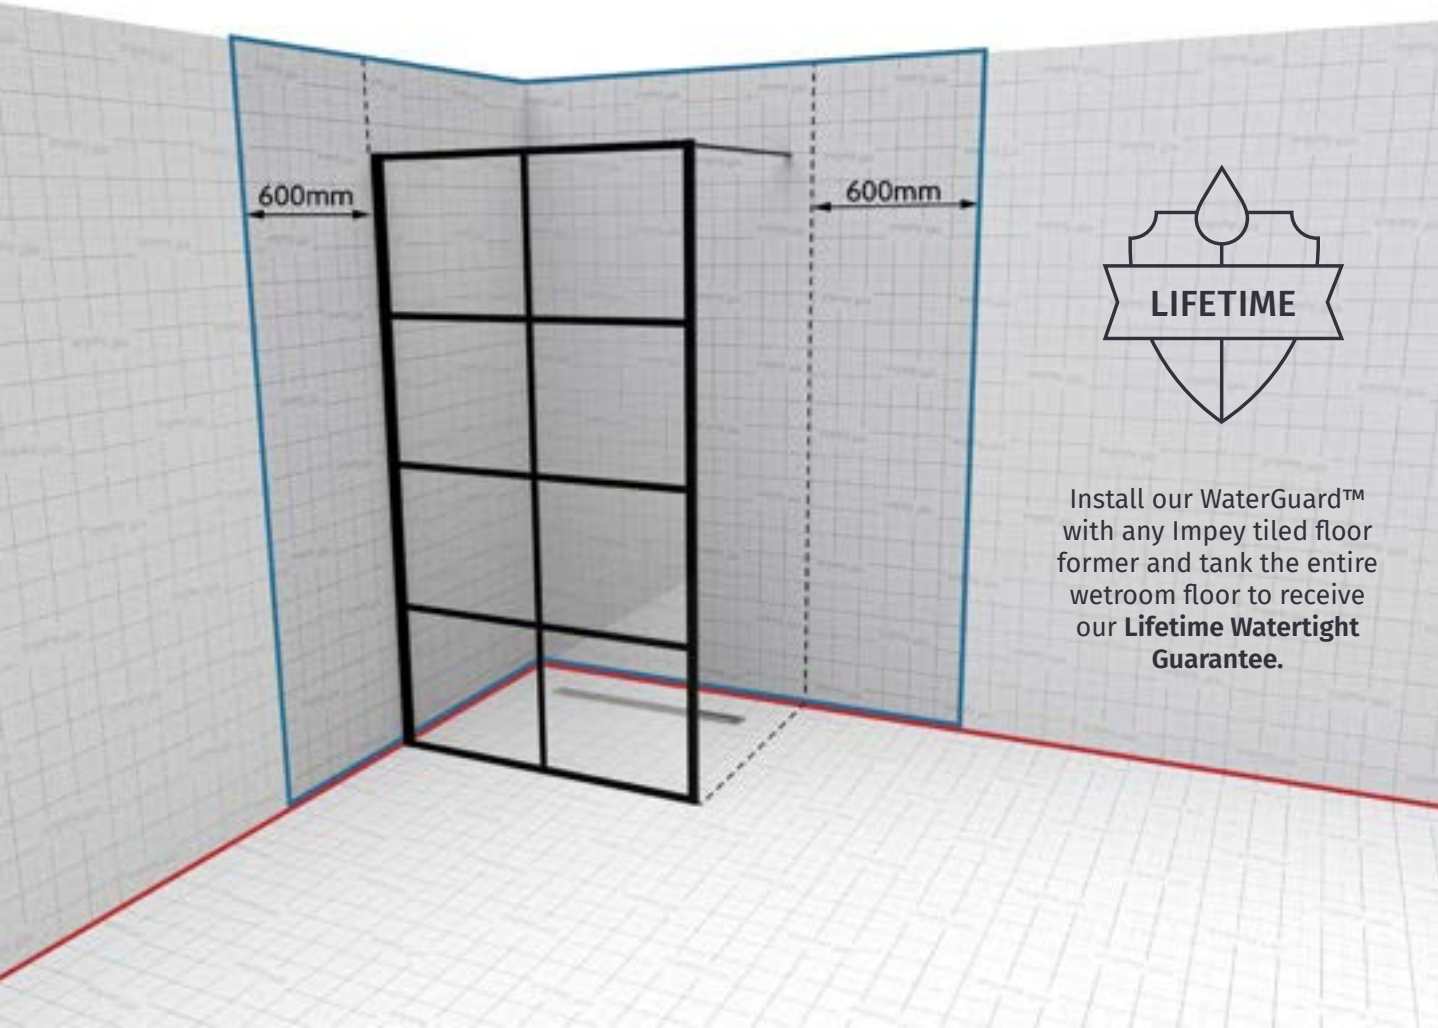

Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

WaterGuard™ Kits

Ready-configured options for different room sizes and layouts

WaterGuard™ is available in a range of pre-configured kits to simplify ordering and ensure the correct components are on hand for installation.

From floor-only applications to full wall-and-floor tanking, each kit is designed to support a consistent installation standard.

Part of a complete Impey system, WaterGuard™ integrates seamlessly with:

- Impey tiled floor formers
- Impey drainage systems
- Aqua-Mat™ underfloor heating

When used together, these elements create a wetroom system that is easier to install, easier to specify and built for long-term reliability.



WaterGuard™ Kit options

Product	Code	Contents
5m² Floor kit	WG5	5m² Impey Waterguard membrane, 500ml BAL primer, 15m jointing tape, 5x internal corners, 1x external corner, Butyl sealant
10m² Floor kit	WG10	10m² Impey Waterguard membrane, 500ml BAL primer, 2x 10m jointing tape, 5x internal corners, 1x external corner, Butyl sealant
10m² Wall kit	WG10W	10m² Impey Waterguard membrane, BAL primer, 10m jointing tape, Butyl sealant
15m² Wall & Floor kit	WG15WF	5m² Impey Waterguard membrane, 10m² Impey Waterguard membrane, 2x 500ml BAL primer, 15m jointing tape, 10m jointing tape, 5x internal corners, 1x external corner, 2x Butyl sealant
20m² Wall & Floor kit	WG20WF	2x 10m² Impey Waterguard membrane, 2x 500ml BAL primer, 3x 10m jointing tape, 5x internal corners, 1x external corner, 2x Butyl sealant



For advice and support, please contact our Technical Team on 01460 256080 or visit impeyshowers.com

WaterGuard™ Accessories

Everything needed to complete the system correctly

WaterGuard™ Accessories

WaterGuard™ accessories are designed to work together to make specification simpler, installation more consistent and long-term performance more dependable.

- Jointing tape seals membrane overlaps and 1m sheet joints for a continuous watertight finish
- Internal corners provide a secure, reliable seal at internal wall junctions
- External corners protect exposed detailing points from water ingress
- Butyl joint sealant reinforces critical joints and connection points
- BAL primer prepares the substrate for secure and consistent adhesion
- Pipe collars create a reliable seal around pipe penetrations, one of the most vulnerable areas in any wetroom installation

Product	Code
10m Jointing tape	WGJT10
Internal corner	WGIPC
External corner	WGEPC
Butyl joint sealant	WGJS
500ml BAL primer	WGPR




WaterGuard™ Pipe Collars

WaterGuard™ Pipe Collars are designed to seal around existing and new pipework while maintaining the integrity of the waterproofing layer. The self-adhesive square bonds securely to the wall, while the flexible centre membrane grips around pipe diameters from 12mm to 146mm for a dependable watertight seal.

Optional short feature bullets for collars

- Seals pipe penetrations from 12mm to 146mm
- Self-adhesive for fast installation
- Ready for tiling with no waiting period
- Compatible with WaterGuard™ membrane and Impey tanking kits

Product	A	Code
WaterGuard Pipe Collar Small	Pipe size 12-22mm	WGPCS
WaterGuard Pipe Collar Medium	Pipe size 31-50mm	WGPCM
WaterGuard Pipe Collar Large	Pipe size 93-146mm	WGpcl

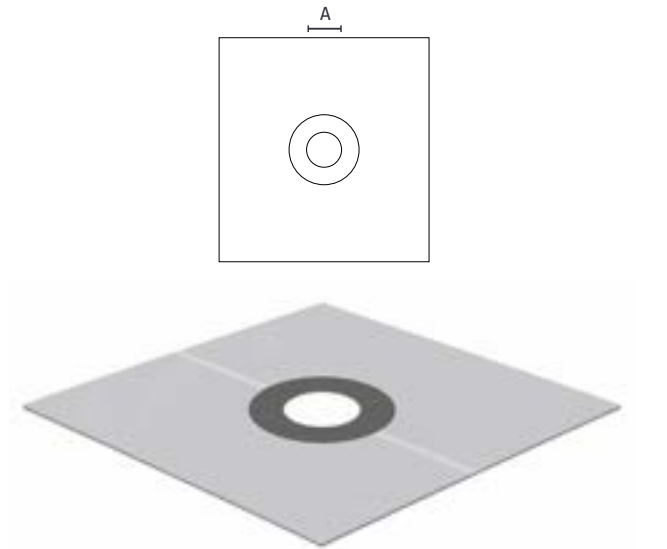

Lifetime Watertight Guarantee when completed with Impey WaterGuard™



Manufactured in the UK

Aqua-Mat™ Underfloor Heating

Reliable warmth, intelligent control, complete comfort

Aqua-Mat™ underfloor heating is designed to enhance the performance and comfort of your wetroom. Providing fast heat-up and dry times and consistent warmth underfoot, it completes the installation with a premium finish.

Fully compatible with all Impey wetroom systems, Aqua-Mat™ delivers efficient performance and dependable reliability. Manufactured to stringent European standards and supported with a 12 year guarantee.

Key features

- Compatible with all Impey floor formers and WaterGuard™
- Even, responsive heat distribution
- Rapid floor drying times
- 500mm wide
- Suitable for timber and concrete floors
- Energy-efficient



Choose your Heating Output

Aqua-Mat™ 100W

Ideal for standard insulation levels and balanced heat performance. Suitable for timber floors.

Size	Code	Heating Load Watts
1.0m ²	AM1.0/V2	100
1.5m ²	AM1.5/V2	150
2.0m ²	AM2.0/V2	200
2.5m ²	AM2.5/V2	250
3.0m ²	AM3.0/V2	300
3.5m ²	AM3.5/V2	350
4.0m ²	AM4.0/V2	400
5.0m ²	AM5.0/V2	500
6.0m ²	AM6.0/V2	600
7.0m ²	AM7.0/V2	700
8.0m ²	AM8.0/V2	800
9.0m ²	AM9.0/V2	900
10.0m ²	AM10.0/V2	1000
12.0m ²	AM12.0/V2	1200

Aqua-Mat™ 150W

Designed for higher heat output requirements or areas with increased heat loss. Suitable for concrete floors.

Size	Code	Heating Load Watts
1.5m ²	AM1.5/150V2	225
2.0m ²	AM2.0/150V2	300
3.0m ²	AM3.0/150V2	450
3.5m ²	AM3.5/150V2	525
4.0m ²	AM4.0/150V2	600
5.0m ²	AM5.0/150V2	750
6.0m ²	AM6.0/150V2	900
9.0m ²	AM9.0/150V2	1350

Choose your Digital Thermostat

Amber DT-Two

- Large colour touch screen
- 7-day, 4-period programming
- Floor temperature limiting function
- Sensor offset to personalise your heating preferences
- Frost protection and holiday mode
- Available in white
- 2 year warranty



Description	Code
Amber DT-Two in white	DT2

Amber DT-Two WiFi

- Wi-Fi connectivity and Smart Control integration
- Large colour touch screen
- 7-day, 4-period programming
- Floor temperature limiting function
- Sensor offset to personalise your heating preferences
- Frost protection and holiday mode
- Available in white or black
- 2 year warranty



Description	Code
Amber DT-Two WiFi in black	DT2BLACKWIFI
Amber DT-Two WiFi in white	DT2WHITEWIFI



For advice and support please contact the Impey technical team on 01460 256080 or visit www.impeyshowers.com



Wetroom Glass Screens & Doors

Wetroom glass screens and doors bring structure, style and functionality to the showering space. They help shape a layout that feels open, refined and easy to use, while delivering the performance needed for everyday life. Impey's range is designed to combine clean contemporary design with dependable practicality, offering the flexibility to suit a wide variety of interiors and installation requirements.

Soho Wetroom Screens & Doors

Page 72

Premier 8 Wetroom Screens

Page 76

Supreme Glass Shower Panels

Page 78

Soho® Wetroom Screens & Doors

Industrial styling, engineered performance

Inspired by urban industrial design, the Soho® collection combines bold aesthetics with high-performance engineering. High quality aluminium powder-coated frame in matte black, paired with 8mm toughened safety glass. The exposed external framing enhances its architectural character while maintaining easy-clean internal surfaces. Ideally designed for wetroom floor installations, Soho® screens and doors deliver a completely level-access solution. Our Soho® screens can also be fitted on shower trays, when fitted without side panels.

Key features

- All panels are 2100mm height
- 8mm toughened safety glass (conforms to EN12150 & EN12600)
- Matte black aluminium frame
- Hidden hinges and seals
- Soft open and close sliding mechanism
- Quick-release sliding door system
- CE certified
- 10 year guarantee



For advice and support,
please contact our
Technical Team on
01460 256080 or visit
impeyshowers.com



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Soho® Wetroom Screens & Doors

Configuration flexibility

Designed to adapt to a wide range of spatial configurations, Soho® enables specifiers and installers to achieve a cohesive, design-led finish without compromising performance.







The Soho® range supports a variety of installation layouts including:

- Alcove installations, 3 wall
- Corner installations, 2 wall
- Single wall walk-in/walk-through layouts

Please note:


When installing a sliding door and side panel, the AH24-SP-KIT side panel connection profile is required.

For walk through panel installations an additional AH24-BAR100 bracing bar is required.

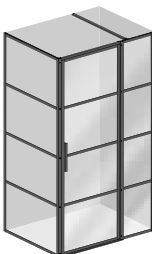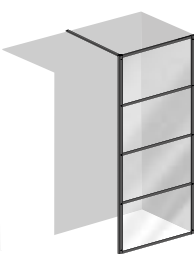	Hinged	Sliding	Walk-in/Walk-through
Alcove (3 wall)	 • Hinged door  • Hinged door with in-line panel	 • Sliding door	 • Horizontal panel
Corner (2 wall)	 • Hinged door  • Hinged door with in-line panel • Side panel	 • Sliding door • Side panel • Additional profile	 • Horizontal panel  • Vertical panel
Single wall		 • Sliding door • Side panels (x2) • Additional profiles (x2)	 • Horizontal panel • Additional bracing bar  • Vertical panel • Additional bracing bar



Product	Width	Handing	Code	Adjustment range
Hinged door	800mm	Left	AH24SC01-80 LEFT	790mm to 810mm
	800mm	Right	AH24SC01-80 RIGHT	790mm to 810mm
	900mm	Left	AH24SC01-90 LEFT	890mm to 910mm
	900mm	Right	AH24SC01-90 RIGHT	890mm to 910mm
Hinged door with in-line panel	1200mm	Left	AH24SC01-120 LEFT	1190mm to 1210mm
	1200mm	Right	AH24SC01-120 RIGHT	1190mm to 1210mm
	1400mm	Left	AH24SC01-140 LEFT	1390mm to 1410mm
	1400mm	Right	AH24SC01-140 RIGHT	1390mm to 1410mm
Sliding door	1200mm	Left	AH24SL01-120-LEFT	1190mm to 1210mm
	1200mm	Right	AH24SL01-120-RIGHT	1190mm to 1210mm
	1400mm	Left	AH24SL01-140-LEFT	1390mm to 1410mm
	1400mm	Right	AH24SL01-140-RIGHT	1390mm to 1410mm
Side panel	800m	-	AH24SP02-80	790mm to 810mm
	900mm	-	AH24SP02-90	890mm to 910mm
Walk-in/walk-though panel horizontal pattern	900mm	-	AW24SC01-N1-90	873mm to 887mm
	1000mm	-	AW24SC01-N1-100	973mm to 987mm
Walk-in/walk-though panel vertical pattern	1200mm	-	AW24SC01-N1-120	1173mm to 1187mm
	1400mm	-	AW24SC01-N1-140	1373mm to 1387mm
Additonal accessories	Bracing bar 1000mm (trimmable)		AH24-BAR100	-
	Angled tie bar kit only (no bracing bar)		AH24-BA01-KIT	-
	Ceiling bracing bar		AH24-BC01-KIT	-
	Side panel connection profile (for use with sliding door only)		AH24-SP-KIT	-



Premier 8 Wetroom Screen

Stylish, spacious wetroom design

The Premier 8 Wetroom Screen provides a sleek, modern solution for creating an open and spacious showering area. Its minimalist design draws the eye, enhancing the feeling of space while clearly defining the showering zone.

Manufactured from 8mm toughened safety glass with a stay-clean finish, the 2000mm high screen delivers long-lasting durability, easy maintenance and a premium appearance.


Designed for easy access

Premier 8 Wetroom Screens help create a barrier-free showering environment. For comfortable access, a minimum entrance width of 500mm is recommended, ensuring the wetroom remains both practical and easy to use.

Key features

- 8mm toughened safety glass for strength and durability
- Stay-clean glass coating to reduce maintenance
- 2000mm screen height for effective splash protection
- Chrome support options including straight and angled bracing bars
- Compatible with a wide range of wetroom floor former installations

Configurations

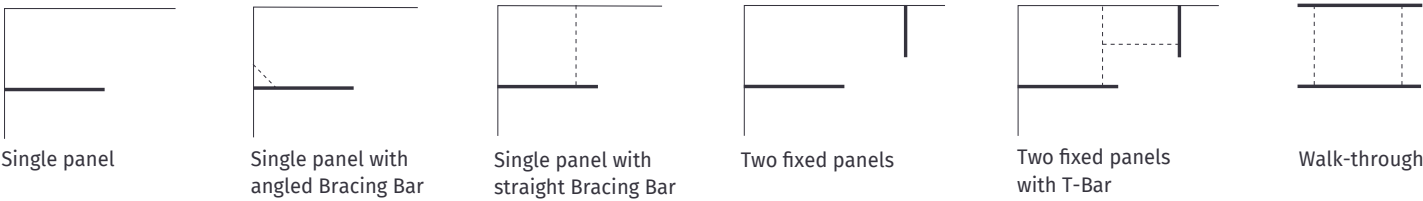

Please note: No adjustment possible in the walk-through configuration. 700mm, 800mm and 900mm glass panels are not sold with a bracing bar. Additional bracing bar required for 1000mm, 1100mm and 1200mm walk through configurations.

Glass Panel		
Width	Code	Adjustment range
800mm	SP80C	780mm - 800mm
900mm	SP90C	880mm - 900mm
1000mm	SP10C	980mm - 1000mm
1100mm	SP11C	1080mm - 1100mm
1200mm	SP12C	1180mm - 1200mm

Additional Accessories	
Description	Code
Bracing Bar 1200mm	SPAB
Glass Screen T Bar	SPTB



Supreme Glass Shower Panels

Luxury design with practical performance

Supreme Glass Shower Panels create a clean, contemporary showering space while maintaining the accessibility and practicality required for both wetrooms and shower trays.

The glass panel is supported by a chrome aluminium column, creating a strong and elegant structure while maintaining a minimal visual footprint.

Supreme Glass Panels can be configured to suit a wide range of shower layouts, including walk-in and walk-through designs. Suitable for both domestic and healthcare environments.

Key features


- Minimalist frameless appearance
- 2000mm high glass panel for improved splash protection
- 8mm toughened safety glass
- Easy clean coating - Aqua-Shield
- Telescopic pole, height adjustment 2027mm to 2700mm
- TigerFix adhesive floor fixing, no drilling required
- Fast, clean installation, easily removable
- Pre-drilled wall profile with 20mm adjustment
- All fixings and seals included
- CE compliant to BS EN 14428

Configurations


Walk-through*



Single panel corner



Two panels corner**



Single panel alcove



* Requires purchase of additional pole. ** Recommended 500mm for ease of access.

Floor to Ceiling Pole Screen

Width	Code	Adjustment range
700mm	ISS70CUC	716mm - 736mm
800mm	ISS80CUC	816mm - 836mm
900mm	ISS90CUC	916mm - 936mm
1000mm	ISS10CUC	1016mm - 1036mm
1200mm	ISS12CUC	1216mm - 1236mm

Additional Accessories

Description	Code
Floor to ceiling pole - walk through configuration	IASCT2000
Full height vinyl floor coving profile	ICEP2000



10
YEARS

10 Year Guarantee



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**



Aqua-Shield
Easy Clean Finish



Geesa Bathroom Accessories

Impey is proud to own the Geesa range. Since 1885, Geesa has specialised in bathroom accessories.

What started as attention to detail has grown into a design-led brand with Dutch roots. We focus on materials, proportion and performance — creating accessories that elevate the bathroom without overpowering it.

Geesa products are specified worldwide — in private homes, hotels and high-traffic environments such as cruise ships. Every piece is engineered for durability, ease of installation and long-term use.

Designed with purpose: considered aesthetics, robust construction and intelligent functionality.



Frame	Page 82
Leev	Page 86
Shift	Page 88
Nemox	Page 94
Opal	Page 100

Discover the full Geesa collection

The collections featured in this brochure represent just a selection of the Geesa range available through Impey. Scan the QR code to explore our complete portfolio of bathroom accessories, finishes and design collections.

Scan to view the full Geesa range.



Frame

Multifunctional design, architectural presence

Frame combines storage and function in a single, clean-lined structure. Shelving, basket and holders integrate seamlessly to create refined, space-efficient solutions.

Awarded the iF Design Award, Frame balances visual simplicity with practical innovation. Available in Black, Black/Chrome and White/Chrome.



Frame Black

Powder-coated matt black over solid brass construction. The metal frame and colourfast inlays create a cohesive, architectural look.



Shower Basket
Code [918801-06-06](#)



Bathroom Shelf
Code [918804-06-06](#)



Toilet Brush & Holder
Code [918811-06-06](#)



Toilet Roll Holder with black shelf
Code [918824-06-06](#)



For advice and support please contact the Impey technical team on **01460 256080** or visit www.impeyshowers.com

Frame Black/Chrome

Polished chrome paired with black detailing. A strong visual statement that integrates effortlessly with contemporary chrome brassware.



Shower Basket
Code [918801-02-06](#)



Bathroom Shelf
Code [918804-02-06](#)



Toilet Brush & Holder
Code [918811-02-06](#)



Toilet Roll Holder with black shelf
Code [918824-02-06](#)

Frame White/Chrome

Crisp white inlays set within a chrome frame. A clean, understated option that complements modern sanitaryware.



Shower Basket
Code [918801-02](#)



Bathroom Shelf
Code [918804-02](#)



Toilet Brush & Holder
Code [918811-02](#)



Toilet Roll Holder with white shelf
Code [918824-02](#)



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Leev

Modular storage, clean structure

Leev is built around minimalist design. Available in Black, a minimalist shelf system designed to adapt, combine and expand.
Recognised with the Good Industrial Design Award, Leev delivers flexibility with a strong architectural character.



Bathroom Shelf with Toilet Roll Holder with cover
Code [918208-06-280](#)



Bathroom Shelf with Toilet Roll Holder without cover
Code [918209-06-280](#)



Bathroom Shelf with Toilet Roll Holder without cover double
Code [918212-06-280](#)



Bathroom Shelf with Towel Hook & Soap Dispenser
Code [918216-06-280](#)



For advice and support please contact the Impey technical team on **01460 256080** or visit www.impeyshowers.com

Shift

Iconic geometry, subtle distinction

Shift is defined by its signature angular form — a parallel rectangle rotated by 20 degrees. The result is distinctive yet restrained.

This square-profile collection delivers understated luxury with precise detailing and a confident presence. Available in Brushed Gold, Black, Brushed Stainless Steel and Chrome.



Shift Black

Matt black enhances the sculptural form, creating depth and definition in modern interiors.



Toilet Roll Holder right hand
Code 919909-06-R



Double Toilet Roll Holder black with matt black marble effect shelf
Code 919948-06-M6



Toilet Brush & Holder black lid & brush
Code 919911-06-06



Medium Towel Hook
Code 919967-06




For advice and support please contact the Impey technical team on **01460 256080** or visit www.impeyshowers.com

Shift Chrome


Polished chrome delivers a crisp, timeless look with a sophisticated finish.



Toilet Roll Holder right hand
Code [919909-02-R](#)

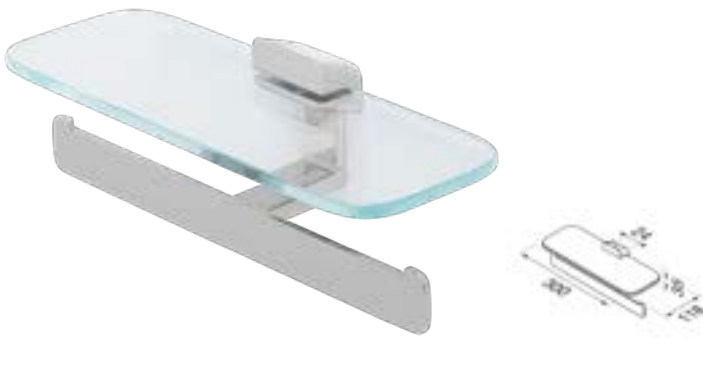

Double Toilet Roll Holder with shelf
Code [919948-02](#)

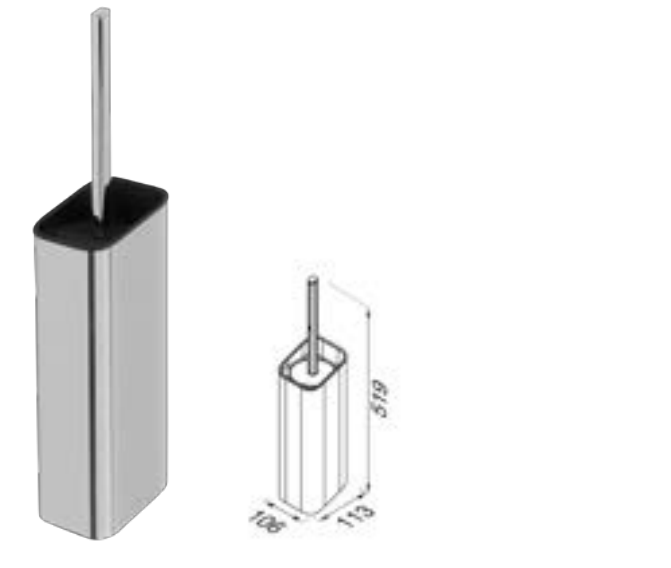

Toilet Brush & Holder black lid & brush
Code [919911-02-06](#)




Medium Towel Hook
Code [919967-02](#)

Shift Brushed Gold


Warm metallic tones with a brushed finish for a refined, statement aesthetic. The GEESA Brushed Gold finish is equivalent to the Brushed Brass finish commonly recognised in the UK market.



Toilet Roll Holder right hand
Code [919909-07-R](#)

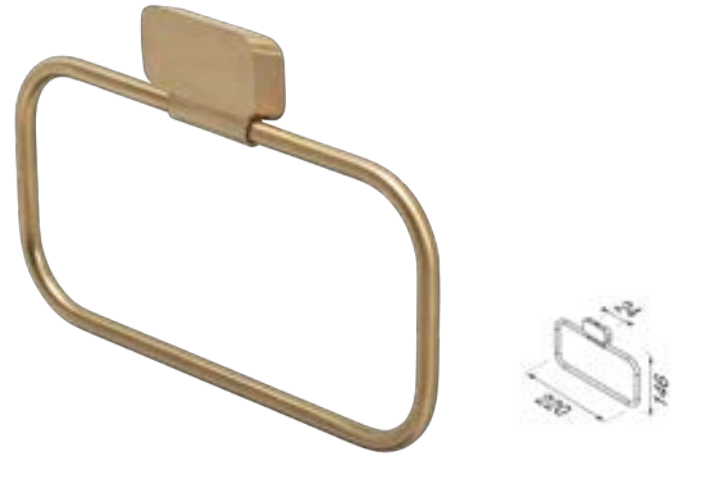

Towel Ring
Code [919904-07](#)

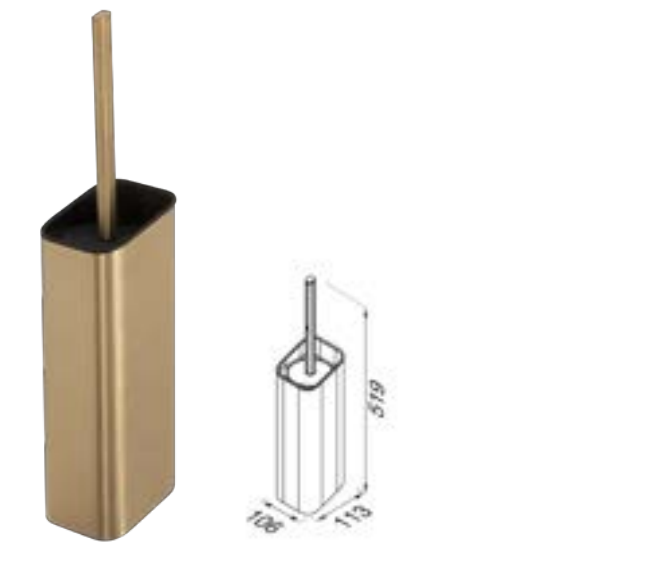

Toilet Brush & Holder black lid & brush
Code [919911-07-06](#)



Medium Towel Hook
Code [919967-07](#)




For advice and support please contact the Impey technical team on **01460 256080** or visit www.impeyshowers.com

Shift Brushed Stainless Steel

A durable, tactile finish that emphasises the purity of the design.



Toilet Roll Holder right hand
Code [919909-05-R](#)

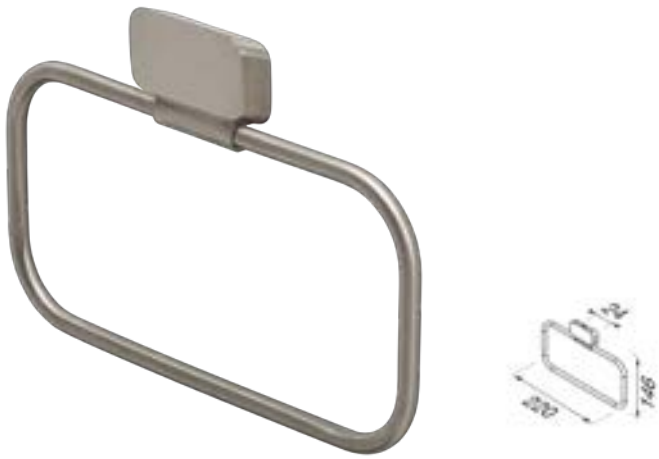

Towel Ring
Code [919904-05](#)



Toilet Brush & Holder black lid & brush
Code [919911-05-06](#)



Medium Towel Hook
Code [919967-05](#)



Nemox

Refined simplicity, complete versatility

Nemox is built on balanced, rounded forms and functional clarity. A comprehensive collection suited to both residential and commercial applications.
Available in Black, Chrome, Brushed Stainless Steel and Brushed Gold.



Nemox Black

Bold contrast and defined lines for confident bathroom schemes.



Soap Holder with glass
Code 916503-06



Towel Ring
Code 916504-06



Toilet Roll Holder without cover
Code 916509-06



Toilet Brush & Holder black brush head
Code 916511-66



Towel Hook
Code 916513-06



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Nemox Chrome

The original Nemox finish. Polished, versatile and widely specified.



Soap Holder with glass
Code 916503-02



Towel Ring
Code 916504-02



Toilet Roll Holder without cover
Code 916509-02



Toilet Brush & Holder black brush head
Code 916511-06



Towel Hook
Code 916545-02

Nemox Brushed Stainless Steel

Durable and practical, with a finish that reinforces the timeless form.



Soap Holder with glass
Code 916503-05



Towel Ring
Code 916504-05



Toilet Roll Holder without cover
Code 916509-05



Toilet Brush & Holder black brush head
Code 916511-05



Towel Hook
Code 916545-05



For advice and support please contact the Impey technical team on 01460 256080 or visit www.impeyshowers.com

Nemox Brushed Gold

Subtle warmth with a premium brushed surface — designed to complement contemporary and classic interiors. The GEESA Brushed Gold finish is equivalent to the Brushed Brass finish commonly recognised in the UK market.



Soap Holder with glass
Code 916503-07



Toilet Roll Holder with cover
Code 916508-07



Toilet Roll Holder without cover
Code 916509-07



Toilet Brush & Holder black brush head
Code 916511-07



Towel Hook
Code 916513-07



Opal

Elementary forms, elevated detail

Opal explores the relationship between circular and rectangular geometry. Clean shapes are paired with a distinctive floating cover detail.

The result is playful yet refined — suitable for both residential and hospitality environments. Available in Black, Brushed Metal Black, Brushed Gold, Brushed Stainless Steel and Chrome.



Opal Black

Bold contrast and defined lines for confident bathroom schemes.



Soap Holder
Code [917203-06](#)




Toilet Roll Holder without cover
Code [917209-06](#)



Toilet Brush & Holder
Code [917211-06](#)



Double Towel Hook
Code [917215-06](#)



Opal Brushed Metal Black

Textured brushed metal black introduces depth and an industrial edge while retaining a refined, architectural feel.



Soap Holder
Code [917203-09](#)



Toilet Roll Holder without cover
Code [917209-09](#)



Toilet Brush & Holder
Code [917211-09](#)



Double Towel Hook
Code [917215-09](#)

Opal Brushed Stainless Steel

Brushed stainless steel delivers a durable, tactile finish that enhances Opal's clean lines with subtle sophistication.



Soap Holder
Code [917203-05](#)



Toilet Roll Holder without cover
Code [917209-05](#)



Toilet Brush & Holder
Code [917211-05](#)



Double Towel Hook
Code [917215-05](#)



For advice and support please contact the Impey technical team on **01460 256080** or visit www.impeyshowers.com

Opal Chrome


Polished chrome offers a bright, timeless surface that highlights the floating detail and integrates effortlessly with modern brassware.



Soap Holder
Code [917203-02](#)



Toilet Roll Holder without cover
Code [917209-02](#)

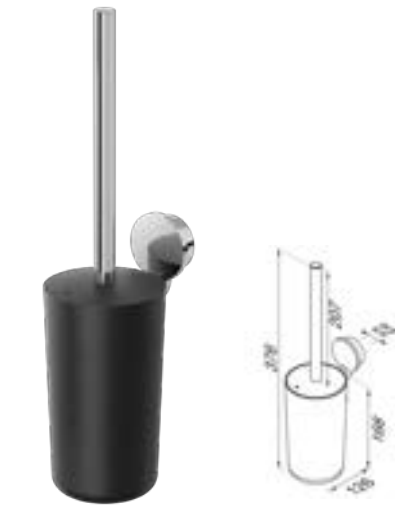

Toilet Brush & Holder
Code [917211-02](#)



Double Towel Hook
Code [917215-02](#)

Opal Brushed Gold

A warm brushed gold tone that adds understated luxury and softens the clean, circular forms. The GEESA Brushed Gold finish is equivalent to the Brushed Brass finish commonly recognised in the UK market.



Soap Holder
Code [917203-07](#)




Toilet Roll Holder without cover
Code [917209-07](#)



Toilet Brush & Holder
Code [917211-07](#)



Double Towel Hook
Code [917215-07](#)



Comfort and care.

Spaces that support independence, safety, and wellbeing

Impey was founded on the belief that accessible showering could be better designed, better made and better experienced. That belief still drives everything we do.

For healthcare, adaptations and supported living environments, Impey represents more than product choice. It is specialist knowledge, proven performance and leadership in level-access showering. We pioneered the first wetroom floor former with a built-in gradient, setting a new standard for safe, effective wetroom design and helping establish the modern category.

Today, our healthcare range is trusted by occupational therapists, local authorities, housing providers, contractors and specifiers who need solutions that work first time and continue to perform over the long term. From drainage and flooring to half-height doors, trays, seats and support products, every detail is developed to support safer showering, easier installation, easier maintenance and greater dignity for the end user.

This is why Impey stands at the premium end of the market. Not because we make adaptive showering feel institutional, but because we elevate it. We bring together technical rigour, purposeful innovation and considered design to help create environments that are safe, dependable and worthy of the people who use them.



This is Impey _____
Accessible showering solutions built for confidence, comfort and care.



Wetroom Floor Formers & Drainage

In healthcare and supported living environments, wetroom designs must work hard every day. Supporting safe, efficient showering that stands up to frequent use and makes installation and maintenance as straightforward as possible. Impey's wetroom floor formers and drainage solutions are developed for these demands, delivering reliable level-access performance, practical installation, flexibility and the confidence required in care-focused settings where safety, hygiene and long-term durability matter most.

EASYFIT, SOLIDFIT & LEVEL-GRADE FLOOR FORMERS & DRAINAGE

		Level-Dec EasyFit	Page 110
		SolidFit Wetroom System	Page 112
		Level Grade	Page 114
		Vinyl Wetroom Floor Drainage	Page 116



Suitable for timber floors



Suitable for concrete floors

Level-Dec EasyFit

A product specifically designed for vinyl installations

The patented **Level-Dec EasyFit** wetroom floor former from Impey has been continuously refined to deliver outstanding performance and reliability. Engineered to simplify installation, servicing, and long-term care, Level-Dec EasyFit supports vinyl flooring to create a **durable, longer-lasting wetroom solution**. Level-Dec EasyFit floor formers provide one of the **easiest and most dependable ways to achieve the correct gradient** for efficient water drainage in wetroom floors.


Key features

- Suitable for wooden and concrete subfloors
- Quickest and easiest floor formers to install on the market
- No under-boarding required*
- Can be cut with a diamond cutting blade
- Simple to drill, allowing additional screw fixing points where required


*For joists with centre spacing up to 415mm

Code	Length	Width	A	B
LDE8080GRY	800mm	800mm	320mm to 480mm	320mm to 480mm
LDE9090GRY	900mm	900mm	370mm to 530mm	370mm to 530mm
LDE1010GRY	1000mm	1000mm	420mm to 580mm	420mm to 580mm
LDE1275GRY	1200mm	750mm	295mm to 455mm	520mm to 680mm
LDE1290GRY	1200mm	900mm	370mm to 530mm	520mm to 680mm
LDE1212GRY	1200mm	1200mm	520mm to 680mm	520mm to 680mm
LDE1380GRY	1300mm	800mm	320mm to 480mm	570mm to 730mm
LDE1490GRY	1400mm	900mm	370mm to 530mm	620mm to 780mm
LDE1580GRY	1500mm	800mm	320mm to 480mm	670mm to 830mm
LDE1512GRY	1500mm	1200mm	520mm to 680mm	670mm to 830mm
LDE1775GRY	1700mm	750mm	295mm to 455mm	770mm to 930mm
LDE18590GRY	1850mm	900mm	370mm to 530mm	845mm to 1005mm

1:40 gradient across the whole surface down to the drain

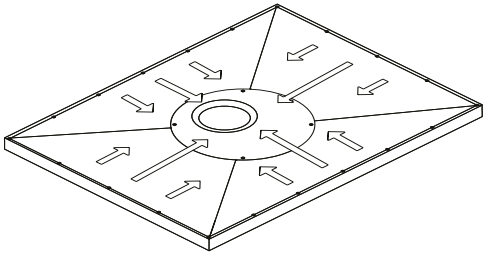


Registered design - EU Registration number 001 377 002, 001 346 621.

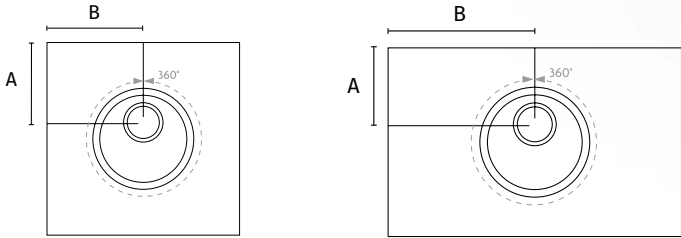

Trimmable up to smooth central area, see datasheet.

Please note all Impey wetroom floor formers and drains are now sold separately. Please refer to page 118 to view our compatible drain options.

Award-winning 360° rotating drain enables complete flexibility for outlet positioning to avoid joists and facilitate connection to existing drainage systems
Patented design (GB 2 431 341)

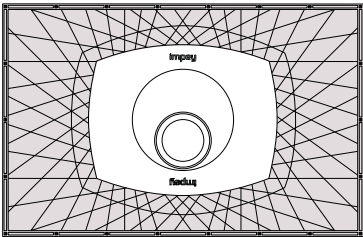

Trimmable area shown in grey.

Strong and rigid design with underside spoke pattern for increased rigidity, supporting up to 300kg

The 22mm depth aligns with commonly specified flooring materials, ensuring a consistent level-access finish



Lifetime Guarantee



Manufactured in the UK

SolidFit™ Floor Former

Reliable, adaptable, built for every space

The SolidFit™ Wetroom System combines a high-performance floor former, advanced drainage and proven waterproofing to deliver safe, durable, level-access showering in both residential and commercial environments. SolidFit™ brings together strength, flexibility and installation simplicity, backed by trusted product innovation and national technical support.


The SolidFit™ former delivers long-life performance with smart installer-led features. SolidFit™ can be installed on timber floors (with under-boarding) or recessed into solid floors, making it ideal for adaptations, refurbishments, new builds and care environments.

Key features

- 22mm profile for true level-access
- Simple, fast installation
- 4-way built-in gradient for fast drainage
- Cut-to-size installation flexibility
- Solid construction for high-load environments
- Works with both tiled and vinyl floors
- Offset/central waste design for easy pipe alignment
- 50mm perimeter for secure enclosure sealing
- Suitable for concrete and wooden floors



For advice and support,
please contact our
Technical Team on
01460 256080 or visit
impeyshowers.com

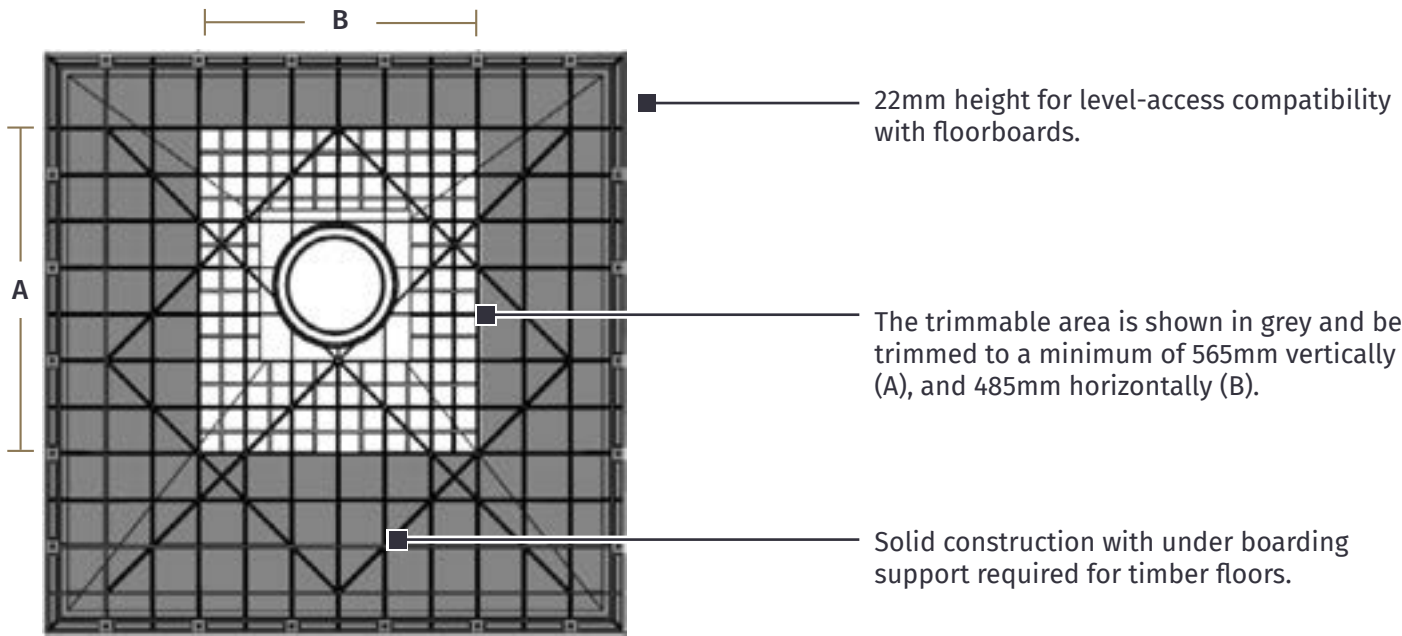

Please note all Impey wetroom floor formers and drains are now sold seperately. Please refer to page 118 to view our compatible drain options.



Code	Length	Width	Trimmable Area	
			A	B
SFF1010GRY	1000mm	1000mm	565mm	485mm
SFF1212GRY	1200mm	1200mm	565mm	485mm
SFF1382GRY	1300mm	820mm	565mm	485mm
SFF1582GRY	1500mm	820mm	565mm	485mm



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Level Grade

Colour-coded modular sections

Level-Grade offers a fast, simple solution for creating the perfect wetroom floor gradient. Suitable for concrete floors with a vinyl floor finish only. Level-Grade can be installed directly onto PIR insulation boards using the insulation mounting feet.

The colour-coded modular sections click together effortlessly to form a matrix, which is then filled with screed to achieve an accurate and reliable fall.

Available in 8 sizes, Level-Grade floor formers offer exceptional design flexibility to suit a wide range of installations. Each former features an average gradient of 1 in 40 and a maximum flow rate of 36 l/min, ensuring efficient drainage performance.

Level-Grade provides a quick and easy way to create the ideal wetroom floor gradient for concrete solid floors.




Key features

- Precise and quick to install
- Ideal for new-build projects
- Can be installed directly onto insulation boards*
- Guarantees a perfect wetroom floor gradient every time
- Eliminates the risk of water pooling




Level-Grade provides a quick and easy way to create the ideal wetroom floor gradient for concrete solid floors.

*when using insulation mounting feet.

Code SCR/IMP

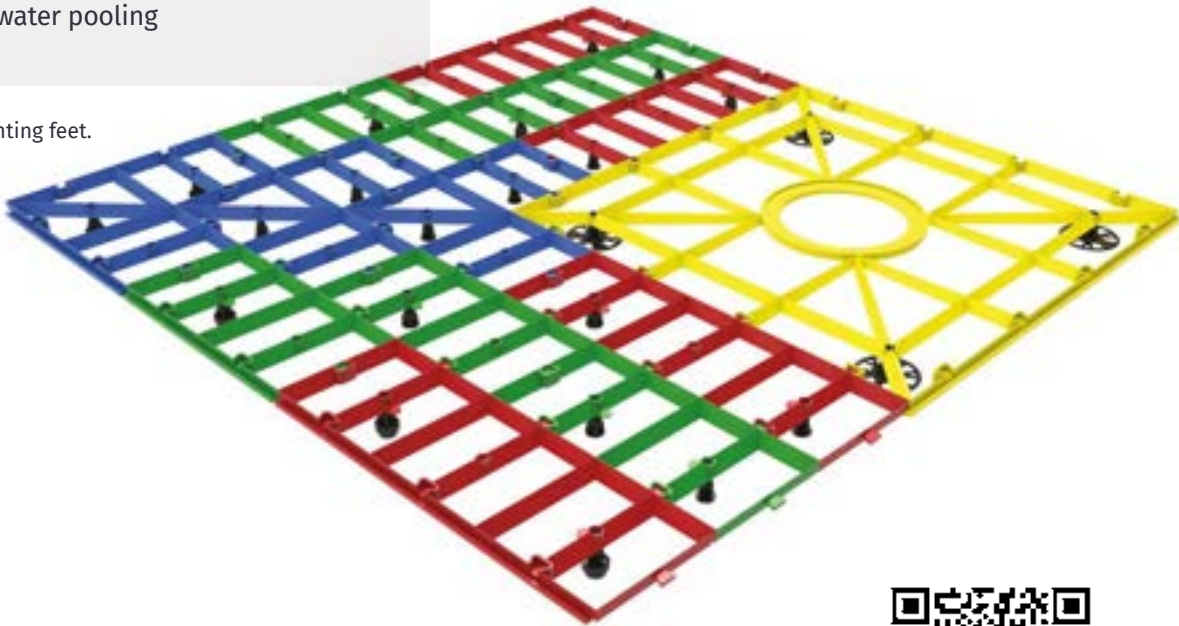

For advice and technical support, please contact our Technical Team on **01460 256080**.
For installation guidance, please refer to the fitting instructions included in the pack or **scan the QR code opposite** to view our installation video.

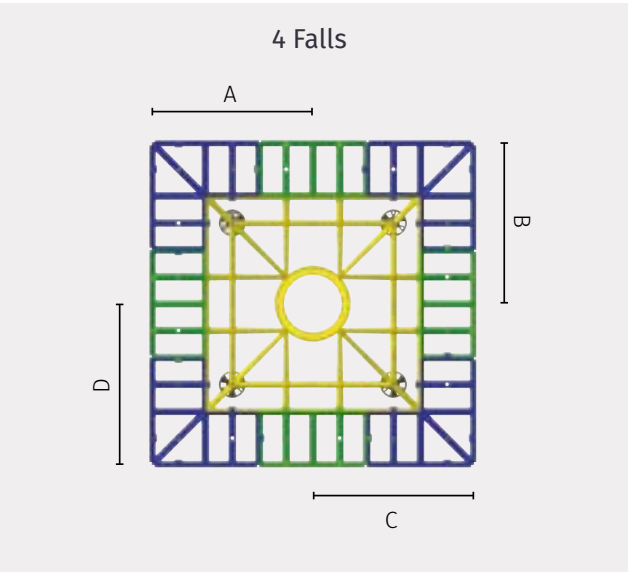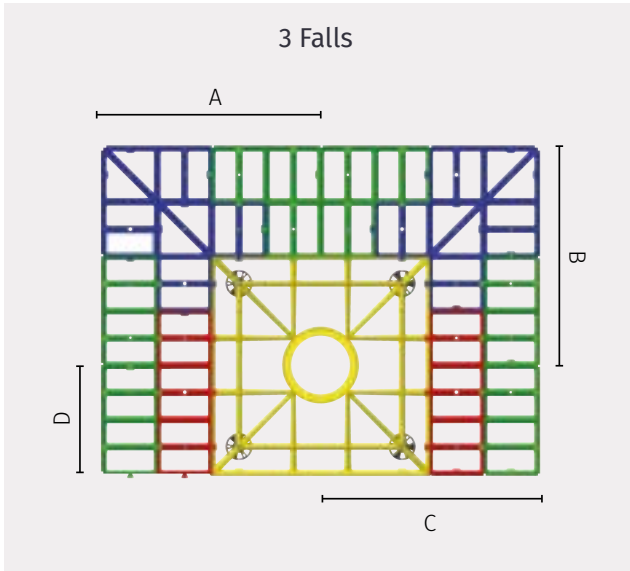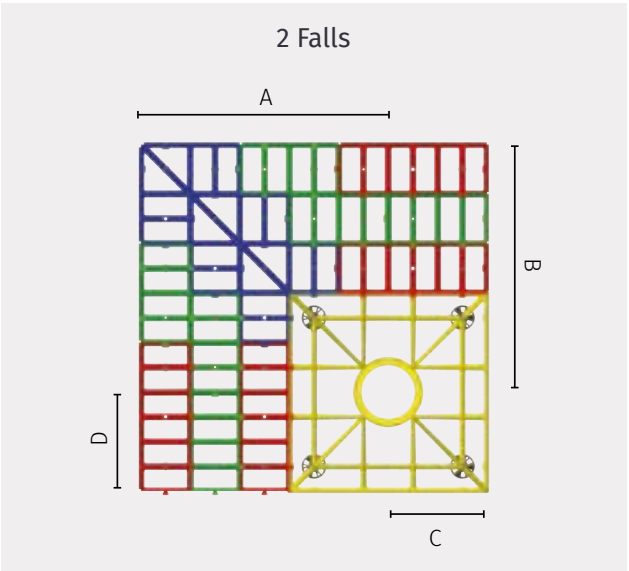

Please note all Impey wetroom floor formers and drains are now sold separately.

Please refer to page 118 to view our compatible drain options.

Falls	Code	Length	Width	Level Grade Depth	A	B	C	D
2 Falls	LG105105	1050mm	1050mm	59.9mm	750mm	750mm	300mm	300mm
2 Falls	LG135135	1350mm	1350mm	70.3mm	1050mm	1050mm	300mm	300mm
3 Falls	LG12090	1200mm	900mm	54.6mm	600mm	600mm	300mm	600mm
3 Falls	LG150105	1500mm	1050mm	70.3mm	750mm	750mm	300mm	750mm
3 Falls	LG180120	1800mm	1200mm	65.1mm	900mm	900mm	300mm	900mm
4 Falls	LG9090	900mm	900mm	49.4mm	450mm	450mm	450mm	450mm
4 Falls	LG120120	1200mm	1200mm	54.6mm	600mm	600mm	600mm	600mm
4 Falls	LG150150	1500mm	1500mm	59.9mm	750mm	750mm	750mm	750mm



Lifetime Guarantee



Manufactured in the UK


Universal Trap for wetrooms

Effective drainage is fundamental to the performance of any wetroom. Impey drainage solutions are designed to integrate seamlessly with our floor formers and shower trays, delivering reliable water management across a wide range of installation scenarios.

All Impey shower trays are supplied with Horizontal Gravity drainage as standard. Where site conditions require an alternative solution, additional options are available to suit Gravity, Pumped and Slimline applications.



For advice and support,
please contact our Technical
Team on 01460 256080 or visit
impeyshowers.com

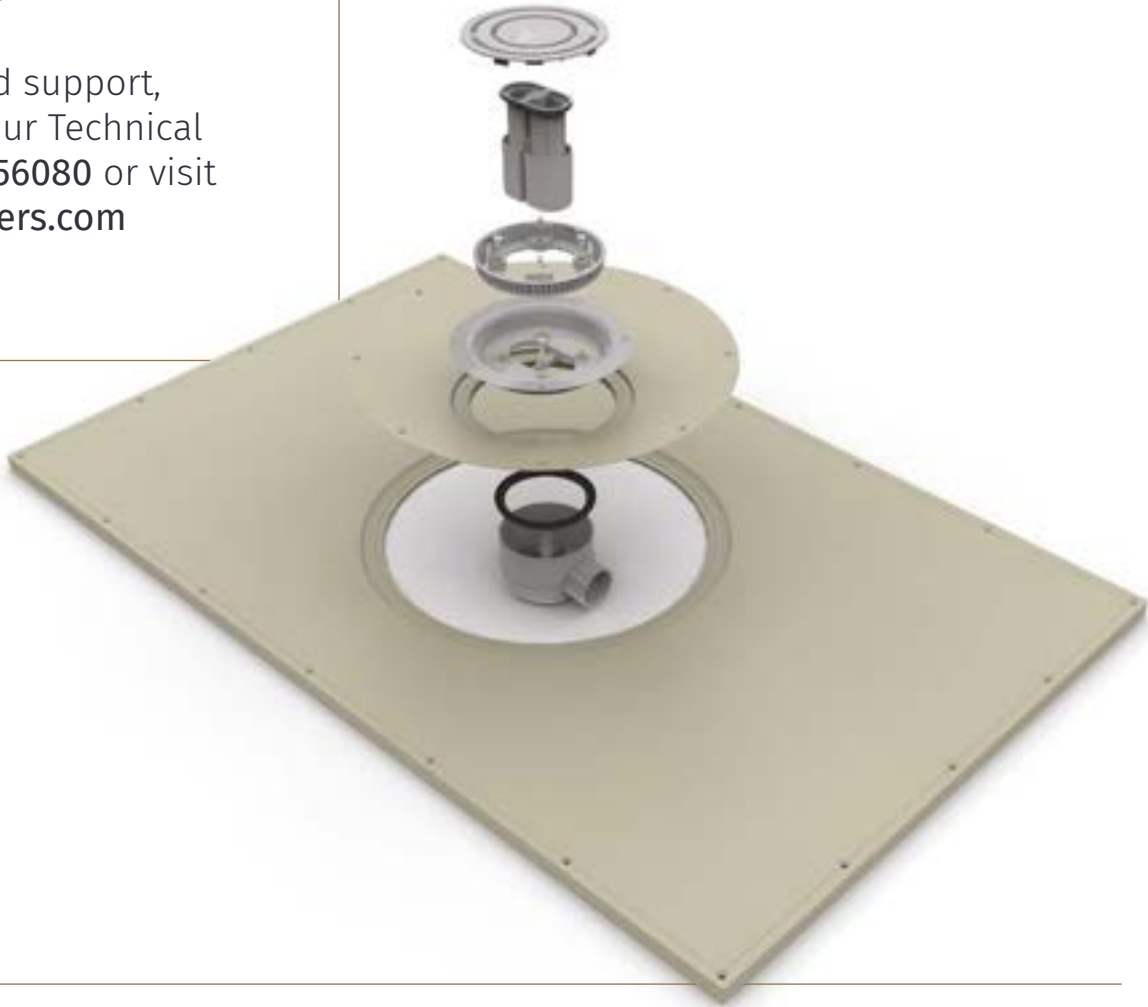

“

Impey drainage solutions are designed to integrate seamlessly with our floor formers and shower trays, delivering reliable water management across a wide range of installation scenarios.



Quick release vinyl top

- Twist and lock system
- Easy clean
- Strong and reinforced



Removable dip tube

- 50mm waterseal
- Building Regulations conformity



Removable bucket

- Complete cleaning



Vinyl clamping ring

- Secures vinyl flooring in place
- Watertight seal



Bowl

- Easy installation 2 piece trap



Sump seal



360 rotating sump

- Available in vertical or horizontal

43mm solvent weld outlet








With grey cover
Code [UTVG01/H](#)

Drainage for vinyl wetroom floors

Reliable performance, built into the floor

Impey vinyl wetroom drainage systems are engineered to provide secure fixing, efficient flow and easy maintenance — helping ensure long-term performance in daily-use environments.

All Level-Dec EasyFit™ and Level-Grade floor formers are supplied as standard with our Gravity horizontal outlet; a vertical outlet option is also available as standard and must be specified when ordering. Slimline traps or Pumped gully options are available at an additional cost for full flexibility. This flexibility allows installers and specifiers to overcome common challenges such as limited floor depth, restricted pipe runs or unbreachable floors — without compromising performance.

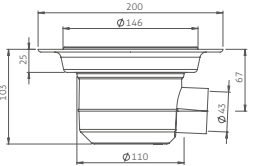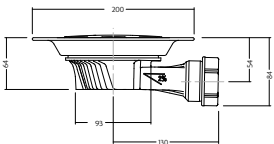		Name	Colour	Code	Waste	Outlet	Water Seal
 		Standard Vinyl Drain Horizontal	Grey Chrome	UTVG01/H UTVC01/H	Gravity	43mm solvent weld	50mm water seal
 		Standard Vinyl Drain Vertical	Grey Chrome	UTVG01/V UTVC01/V	Gravity	110mm wide with 43mm solvent weld	50mm water seal
 		Slim+	Grey Chrome	SLW2VG/H SLW2VCP/H	Gravity	40mm compression	Silicone non return valve
 		McAlpine Horizontal	White	TSG1WH	Gravity	50mm solvent weld with 40mm reducer	75mm water seal
 		McAlpine Vertical	White	TSG2	Gravity	110mm outlet with 50mm reducer	75mm water seal
 		Pumped Grey	Grey	TAD13	Pumped	22mm push fit	-
 		Pumped Chrome	Chrome	TAD3/CP	Pumped	22mm push Fit	-

Impey Bath Adapter for lifetime homes

Future-ready bathroom design for changing needs

The Impey Bath Adapter is an intelligent bathroom solution designed to support lifetime home needs by combining everyday practicality with long-term accessibility.

Install a bath today while preparing for the future with a fully compatible wetroom floor system underneath. When requirements change, the bath can be removed quickly and economically, transforming the space into a level-access wetroom with minimal disruption.

Ideal for social housing, accessible housing projects, and adaptable living environments, the Impey Bath Adapter provides flexibility for both current and future needs.

Key features

- Creates adaptable lifetime home bathrooms
- Allows easy conversion from bath to level-access wetroom
- Reduces future refurbishment costs and disruption
- Supports independent living and changing mobility requirements
- Designed for long-term flexibility in social and residential housing



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**



Impey Bath Adapter

Code UT/BC
Compatible with: UTVG01/H and UTVG01/V

Impey Vinyl Central Drain

A market-first stainless steel drain solution for vinyl wetroom floors

The first drain of its kind, the new **Impey Vinyl Central Drain** brings a premium stainless steel design to vinyl wetroom floors. Available in two top options, with a **brushed stainless steel top** or a **Vinyl Insert top**.

Designed to raise the standard for vinyl drainage, it combines Impey’s trusted clamping technology with a beautifully engineered stainless steel detail, giving installers a proven high-performance drainage solution and customers a cleaner, more refined finish.

Vinyl Central Drain offers a cleaner, more design-led finish for customers who want the practicality of vinyl without compromising the look of their wetroom. For healthcare environments, it delivers the quality, durability and ease of maintenance expected from Impey, with a smooth, accessible finish suited to everyday use.

Key features

- Market-first brushed stainless steel ring with vinyl insert option
- Brushed stainless steel drain solution for vinyl wetroom floors
- Quick and easy to install
- Seamless vinyl floor finish
- Premium brushed stainless steel detail
- Solid 3mm stainless steel top option
- Tried and tested Impey clamping technology
- Solvent-welded assembly
- Suitable across the full range of 2mm wetroom vinyl flooring products
- Easy vertical lift-out access for cleaning
- Designed to help prevent vinyl lifting over time
- Patent pending

Two premium finish options

Brushed Stainless Steel

A 3mm brushed stainless steel top with a premium circular brushed finish, designed to complement the geometry shape.

Vinyl Insert Brushed Stainless Steel Ring


A brushed stainless steel ring frames the Vinyl Insert, creating a seamless appearance across the wetroom floor whilst neatly concealing the edge of the vinyl.



Brushed Stainless Steel



Vinyl Insert Brushed Stainless Steel Ring

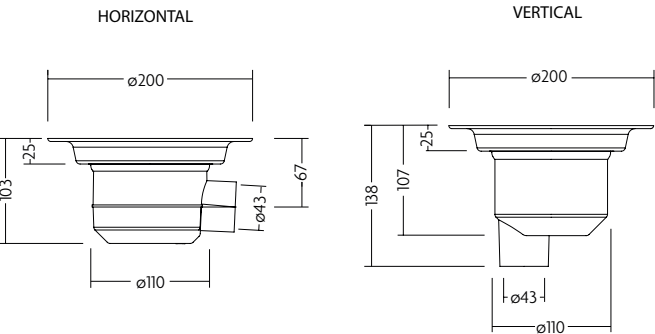

Designed around trusted Impey performance

The Impey Vinyl Central Drain uses the same proven clamping approach installers know and trust, helping to create a secure reliable finish, suitable across the full range of 2mm wetroom vinyl flooring products.

The top assembly lifts vertically in and out for straightforward cleaning and maintenance, while the stable cap design supports everyday use, including wheelchair movement across the drain.

Brushed Stainless Steel



Vinyl Insert Brushed Stainless Steel Ring



Product	Waste	Code Horizontal	Code Vertical
Brushed Stainless Steel	Gravity	UTVSS/H	UTVSS/V
Vinyl Insert Brushed Stainless Steel Ring	Gravity	UTVI/H	UTVI/V



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**



Shower Trays & Drainage

Designed to deliver safe, reliable and accessible showering in every environment, Impey's range of shower trays and wetroom components provides flexible solutions for unbreachable floors, low level-access and fully level-access installations. Every product is designed and developed in the UK, combining robust performance with ease of installation and long-term reliability.

SHOWER TRAYS FOR UNBREACHABLE FLOORS

Radiate	Page 124
Radiate Bath Replacement Tray	Page 126
Mendip	Page 128

LOW LEVEL SHOWER TRAYS

Mantis	Page 130
Mantis Bath Replacement Tray	Page 132
Slimline	Page 134
Slimline Bath Replacement Tray	Page 136
Bath Replacement Tray	Page 137
Shower Tray Drainage	Page 138

Radiate

Pumped shower tray

Radiate has been specifically designed for installations where gravity drainage is not possible. At just 40mm high, it enables low-access showering while housing all pipework neatly within the depth of the tray.


Radiate features an advanced pumped drainage system, acoustically tuned, for ultra-quiet performance. A unique water-channelling tread pattern directs water efficiently to the drain, while the matte, slip-resistant surface provides confidence underfoot. The tray is compatible with leading Whale waste pump systems and is ideal for multi-storey developments and refurbishment projects.

Suitable for electric showers with a maximum flow rate of 8 l/min. 90 mm drain aperture.


Key features

- Low profile 40mm
- Flow rate up to 8l/min
- Supports up to 300kg (47 stone)
- Slip resistant, classified to DIN 51097 Class B
- Optional ramp kits (trimmable to suit tray size)
- Available in 14 sizes, including cut-to-length bath replacement options
- Quick and easy to install
- Easy-clean surface and gully
- Exit pipework from any side of the tray
- Dedicated pumped drain supplied as standard, UTRC01/PV2/KIT
- Compatible with all Whale pumps

Code	Length	Width	Drain centre point	
			A	B
RDT9090/P	900m	900m	450mm	127mm
RDT100100/P	1000mm	1000mm	500mm	127mm
RDT12070/P	1200mm	700mm	350mm	127mm
RDT12080/P	1200mm	800mm	400mm	127mm
RDT12090/P	1200mm	900mm	450mm	127mm
RDT13070/P	1300mm	700mm	350mm	127mm
RDT13080/P	1300mm	800mm	400mm	127mm
RDT14070/P	1400mm	700mm	350mm	127mm
RDT14080/P	1400mm	800mm	400mm	127mm
RDT14090/P	1400mm	900mm	450mm	127mm
RDT15070/P	1500mm	700mm	350mm	127mm
RDT15080/P	1500mm	800mm	400mm	127mm
RDT17070/P	1700mm	700mm	350mm	127mm
RDT17080/P	1700mm	800mm	400mm	127mm

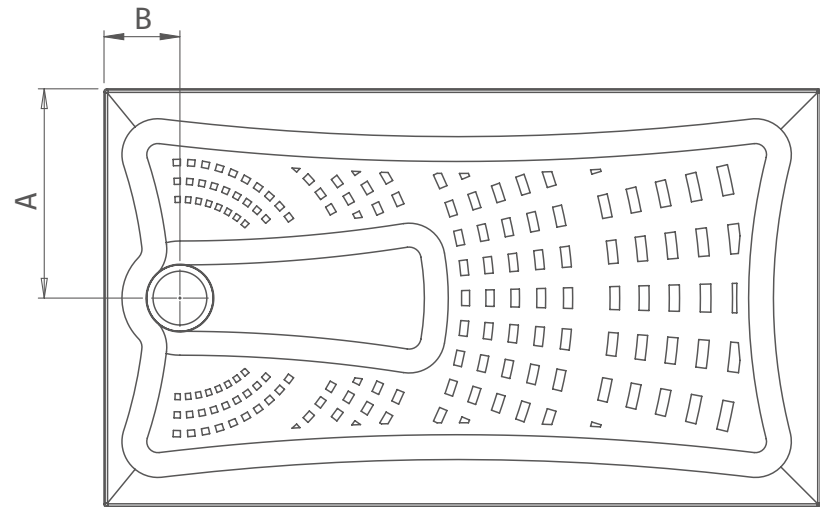

At 40mm high, and with optional ramp solutions, the Radiate tray is low enough to offer easy access to those with limited mobility.

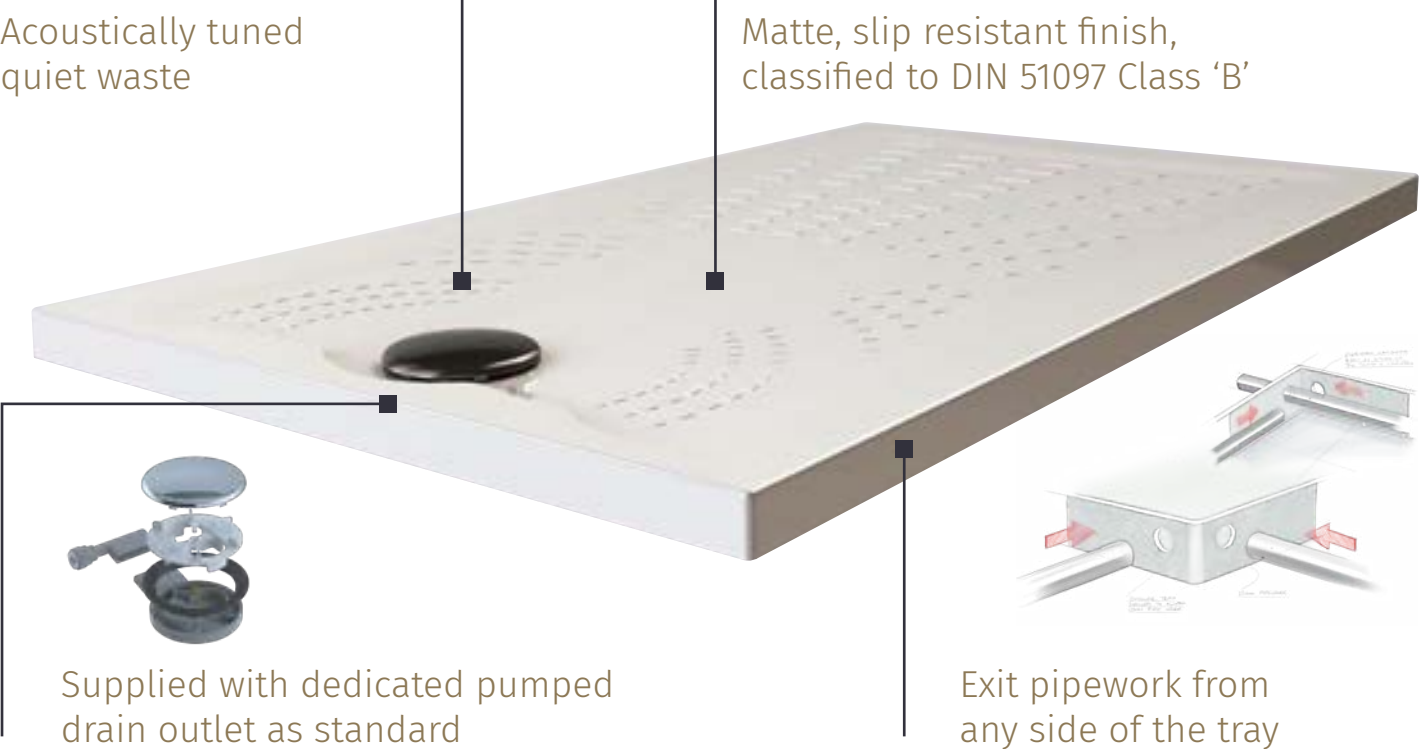

Supplied with dedicated pumped drain outlet as standard

Code UTRC01/P V2



Access friendly ramp kits

Trimmable to suit tray size.

Code	Description
RDR	Radiate Ramp Kit White - Straight + End Caps
RDRKIT	Radiate Ramp Kit White with Corner



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code US12350

For advice and technical support, please contact our Technical Team on **01460 256080**.
For installation guidance, please refer to the fitting instructions included in the pack or **scan the QR code opposite** to view our installation video.



DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test



Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens

Radiate Bath Replacement Tray

Pumped shower tray



Radiate bath replacement trays offer an ideal solution when converting a bathroom from bath to shower without breaching the floor. Designed to fit standard bath footprints, our trays can be cut to length on site using a diamond cutting blade, with end caps supplied.

Optional access ramp kits and end caps are available to support safe and easy entry.

Trimable

Our 1700mm trays are trimmable to 1400mm, including 125mm end cap (comes with 1x end cap).

Code	Description
RDTEC70	1700 x 700mm
RDTEC80	1700 x 800mm

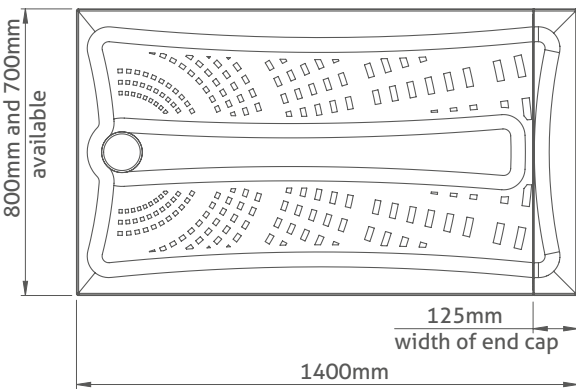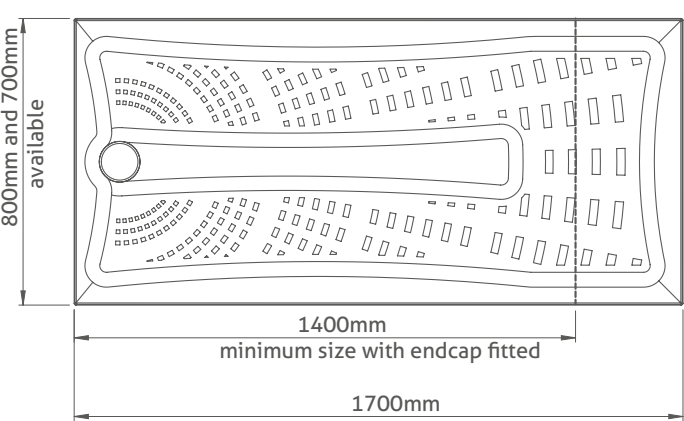

When measuring and cutting the tray please allow for the end cap.
DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test.

Radiate Ultra Quiet Pumped Drain Technology

Designed to solve the challenge of unbreachable floors

Impey's Radiate tray features an innovative ultra-quiet pumped drainage system, enabling shower installation where traditional gravity drainage is not possible.

With all pipework contained within the depth of the tray, Radiate removes the need to excavate or recess into the floor structure, making it ideal for high-rise developments, refurbishment projects and challenging installation environments.

Compatible with Whale Switch Connect, Direct Connect and Instant Match waste pumps, Radiate provides a practical, high-performance answer without compromising on reliability.




Advanced ultra-quiet performance

The Radiate tray has been engineered with a specially designed gradient and water channelling system that directs water efficiently towards the drainage outlet.

Water flows into a dedicated collection chamber before being guided through strategically positioned channels to the pumped outlet. The innovative low-profile outlet design helps minimise air intake, significantly reducing operating noise when compared with conventional pumped drainage systems.

The result is a quieter, more efficient drainage system that enables installation on floors where traditional drainage simply isn't an option.

Code UTRC01/P V2

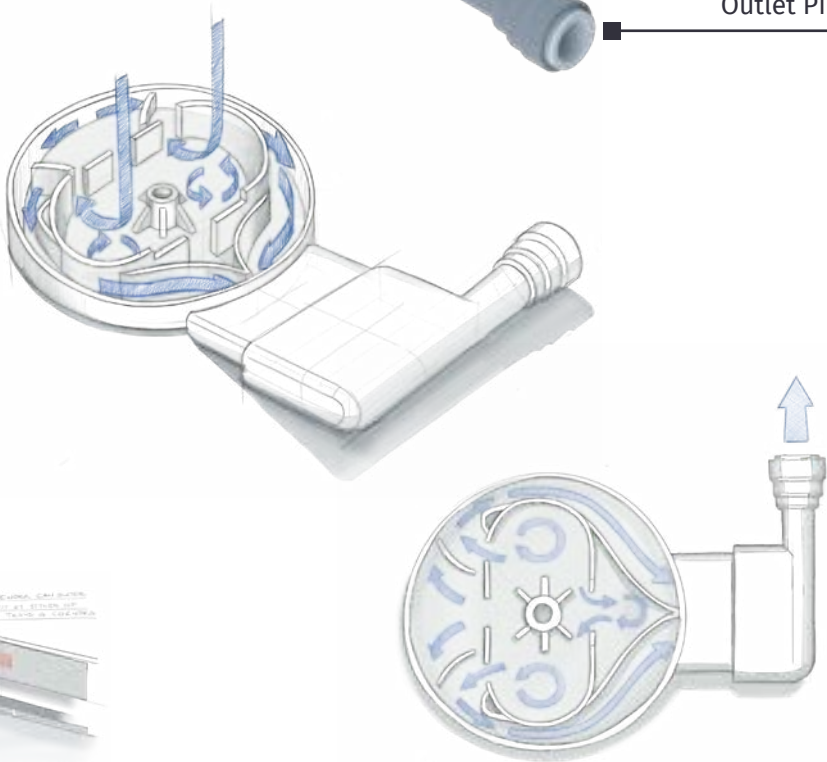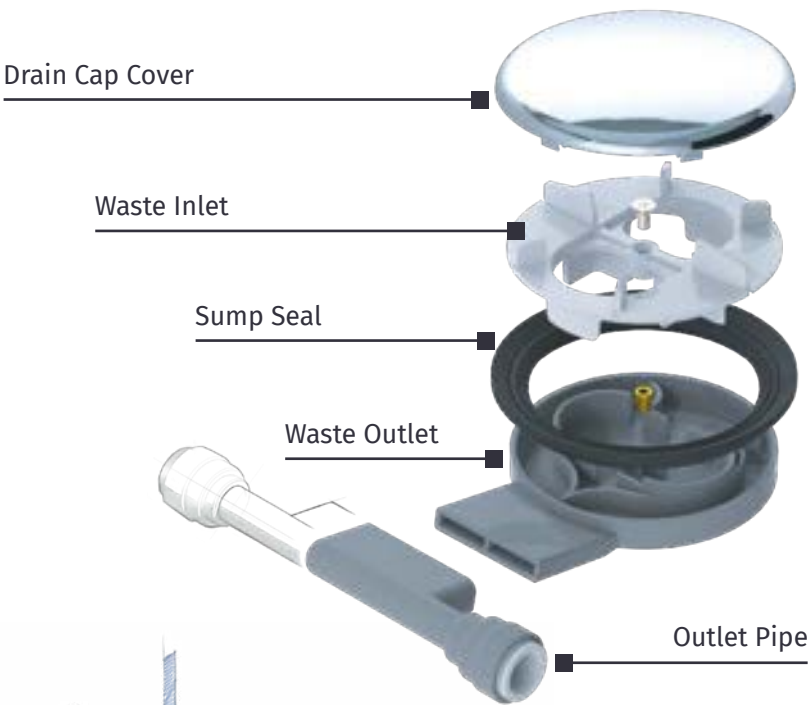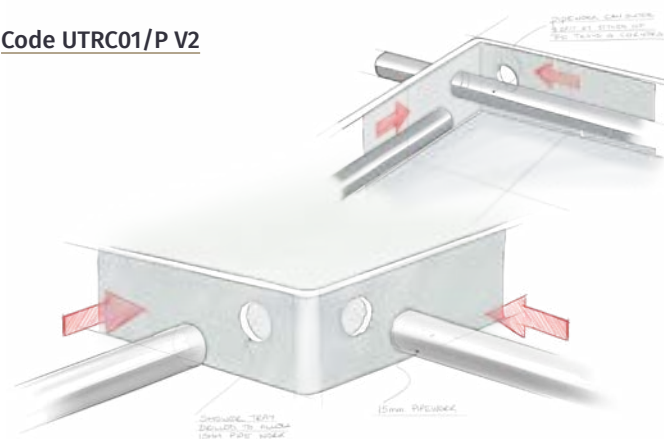

Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens

Mendip

Gravity shower tray

Our Mendip shower tray provides a robust gravity drainage solution for unbreachable floors. With a tray depth of 100mm, it houses a fitted waste trap beneath the tray, eliminating the need to recess pipework into the floor.

Designed to be fully self-supporting, the Mendip does not require bedding down, and offers multiple waste outlet positions to suit site conditions.

Maximum flow rate of 10 l/min. The drain has a 40mm outlet, a 50mm water seal and the tray has a 50mm drain aperture.

Available with a sloping access ramp or half-step to improve accessibility where required. Our 1850mm trays are trimmable to 1250mm length, including 50mm end cap (comes with 2x end caps).

Mendip trays are ideal for multi-storey properties and installations where above-floor drainage is required.


Key features

- Strong 100mm tray depth
- Flow rate up to 10 l/min
- Supports up to 250kg (39 stone)
- Slip resistance classified to DIN 51097 Class A
- Compatible with access ramp
- Available in 7 sizes including cut-to-length bath replacement options
- Exit pipework from any side of the tray
- Factory-fitted waste with swivel outlet
- Gravity drainage solution or D.Trap for pumped waste
- Compatible with electric and mixer showers
- 50mm water seal compliant with Building Regulations
- Inspection cover

Code	Length	Width	Drain centre point	
			A	B
MEN501/C	900mm	900mm	180mm	450mm
MEN601/C	1000mm	1000mm	180mm	500mm
MEN101/C	1250mm	710mm	180mm	625mm
MEN201/C	1250mm	830mm	180mm	625mm
MNE301/C	1500mm	710mm	180mm	750mm
MEN401/C	1500mm	830mm	180mm	750mm
MEN701/C	1850mm	710mm	180mm	925mm



900mm Ramp
Code MEN/R01

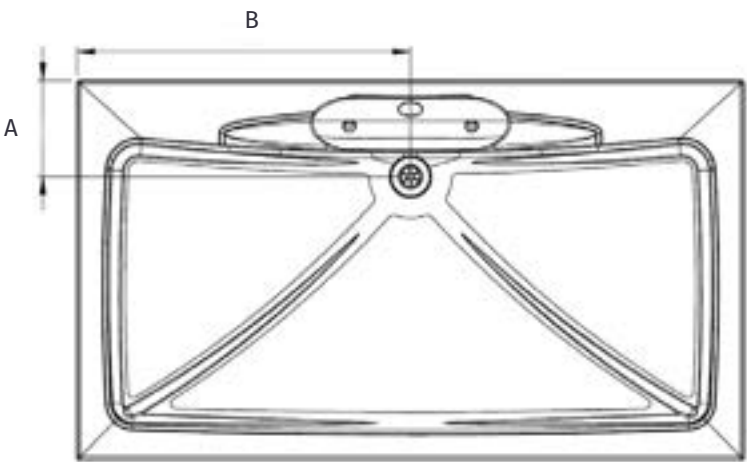

The Mendip tray is available with an optional ramp to allow east of access for those with limited mobility.

Slip resistance classified to DIN 51097 Class ‘A’

Supplied with a factory fitted waste trap with swivel outlet for drainage positioning



Tray depth of 100mm

Robust construction, supporting up to 250kg



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code US12350



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test



Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens

Mantis

Ultra low-profile shower tray

At only 24mm high, our Mantis is the lowest profile shower tray in the Impey range, delivering near level-access without the need for a ramp and can be recessed into the floor for full level-access. Developed in consultation with Occupational Therapists and installers, it is ideal where a wetroom floor former cannot be installed.


The tray features a slip-resistant matte finish and a water-channelling tread pattern to maintain strong drainage performance.

Complete with waste and waterproofing upstand. Supplied with a horizontal gravity drain as standard or compatible with all other drain options, see page 138.

Flow rate up to 11 l/min. 90 mm drain aperture.

Key features

- Ultra-low 24mm height
- Can be recessed for full level-access
- Flow rate up to 11 l/min
- Supports up to 300kg (47 stone)
- Matte, slip-resistant surface classified to DIN 51097 Class B
- No ramp required for wheelchair access
- Available in 12 sizes, including bath replacement trays
- Compatible with all drain options
- Specially designed water-channelling tread pattern
- Compatible with electric and mixer showers

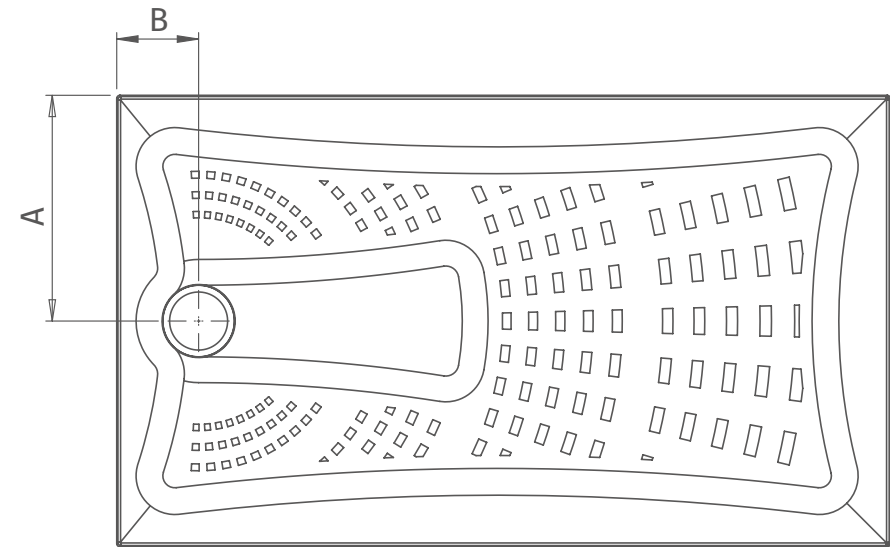

Code	Length	Width	Drain centre point	
			A	B
MTS9090	900mm	900mm	449mm	126mm
MTS100100	1000mm	1000mm	499mm	126mm
MTS12070	1200mm	700mm	349mm	126mm
MTS12080	1200mm	800mm	399mm	126mm
MTS13070	1300mm	700mm	349mm	126mm
MTS13080	1300mm	800mm	399mm	126mm
MTS14070	1400mm	700mm	349mm	126mm
MTS14080	1400mm	800mm	399mm	126mm
MTS15070	1500mm	700mm	349mm	126mm
MTS15080	1500mm	800mm	399mm	126mm
MTS17070	1700mm	700mm	349mm	126mm
MTS17080	1700mm	800mm	399mm	126mm

Slip resistance surface classified to DIN 51097 Class 'B'

No ramp required. At only 24mm, this tray can be accessed easily by wheelchair users



Supplied with a horizontal gravity drain

24mm low level-access tray



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code **US12350**



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test



Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens

Mantis Bath Replacement Tray


Mantis bath replacement trays offer an ideal solution when converting a bathroom from bath to shower without breaching the floor. Designed to fit standard bath footprints, trays can be cut to length on site using a diamond cutting blade, with 1 end cap supplied as standard.

Optional access ramp kits and additional end caps are available to support safe and easy entry.

Trimable

Mantis Bath Replacement Trays have been designed so that they can be cut down to fit a wall-to-wall space where a bath was previously installed. 1700mm trimmable length to 1400mm including 1x 125mm end cap. Bath replacement trays can be cut to length, with end caps supplied to ensure a neat finish.

Code	Description
MTSEC70	1700 x 700mm
MTSEC80	1700 x 800mm

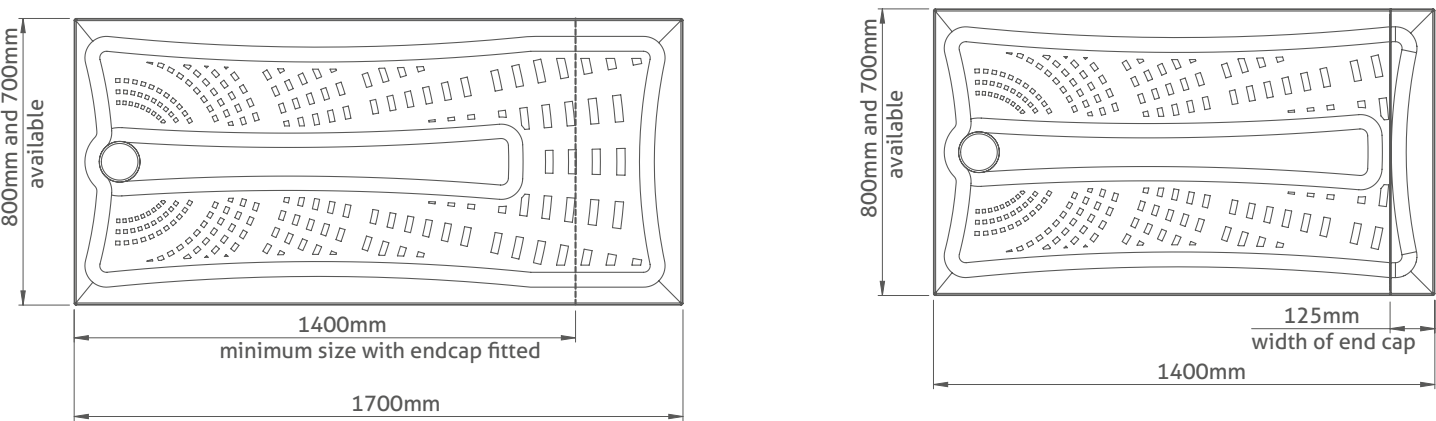

When measuring and cutting the tray please allow for the the end cap.

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test



Lifetime Guarantee



CE tested to BS EN 14527



Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens

Slimline

Our most versatile high performance shower tray


The Slimline range is Impey’s most versatile low-level shower tray, offering industry-leading average flow rates of 33 litres per minute. At 35mm high, it balances accessibility with exceptional drainage performance.

Slimline trays can be recessed into the floor or installed with perimeter ramps. An offset waste position helps avoid underfloor obstructions.

Supplied with a horizontal gravity drain as standard or compatible with all other drain options, see page 138. Average flow rate of 33 l/min (tray size dependent). Pumped flow rate up to 8 l/min. 90 mm drain aperture.


Key features

- Low-profile 35mm height
- Average flow rate of 33 l/min (tray size dependent). Pumped flow rate up to 8 l/min
- Supports up to 250kg (39 stone)
- Slip resistance classified to DIN 51097 Class A
- Optional ramp kits (trimmable to suit tray size)
- Available in 9 sizes, including a bath replacement tray
- Offset waste to avoid underfloor obstructions
- Can be recessed into the floor
- Compatible with electric and mixer showers

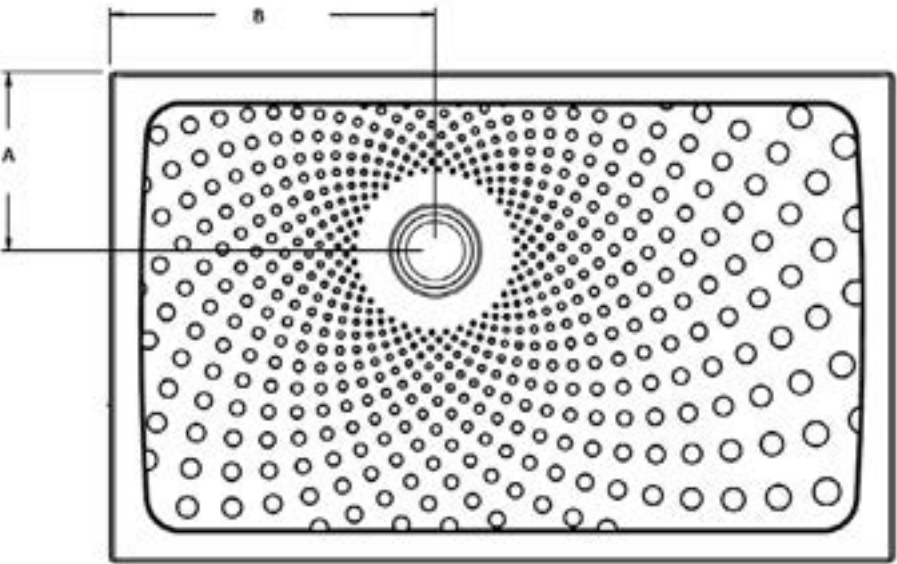

At 35mm high, and with optional ramp solutions,the Slimline tray provides easy access to those with limited mobility.

Code	Length	Width	Drain centre point	
			A	B
SL358080	800mm	800mm	298mm	298mm
SL359090	900mm	900mm	348mm	348mm
SL35100100	1000mm	1000mm	397mm	397mm
SL3512075	1200mm	750mm	273mm	498mm
SL3512090	1200mm	900mm	348mm	498mm
SL3513070	1300mm	700mm	248mm	548mm
SL3513075	1300mm	750mm	273mm	540mm
SL3515075	1500mm	750mm	273mm	648mm
SL3517075/CWEC	1700mm	750mm	273mm	498mm

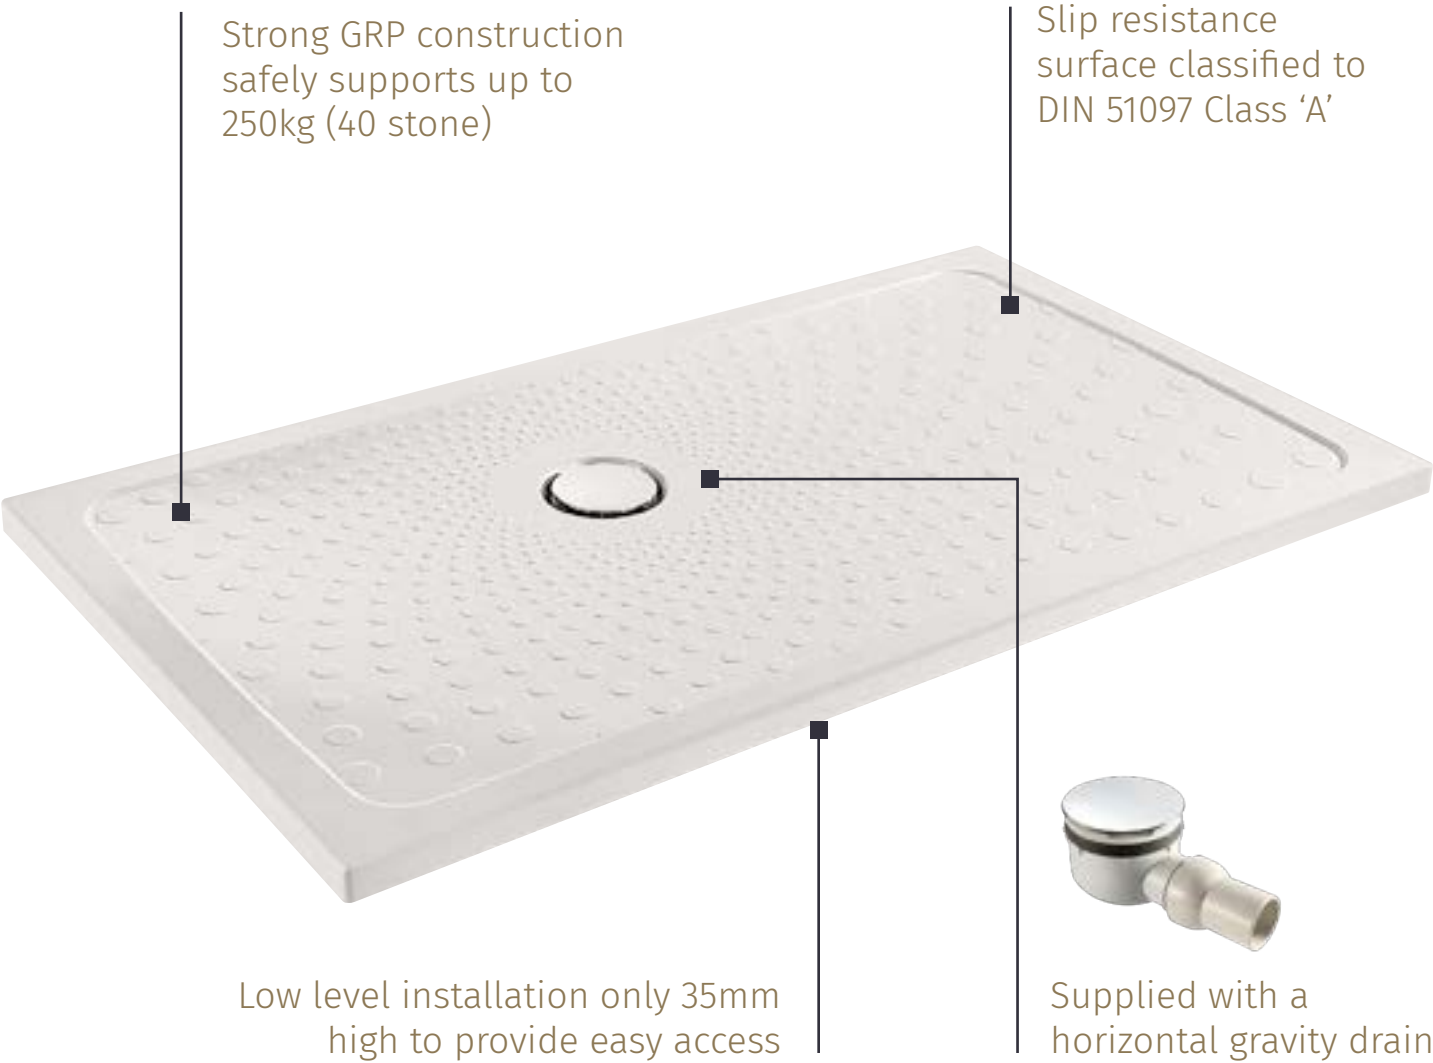

Access friendly ramp kits

Trimmable to suit tray size.

Code	Description
SL35/EC75	750mm Tray end cap
2MR	2000mm Ramp, 2x end caps
2MR KIT	2000mm Ramp, 2x ramp end caps, 1x corner section



Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code US12350

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test

Lifetime Guarantee

CE tested to BS EN 14527


Designed to fit alongside our market leading Half Height Shower Doors (folding/sliding) and Glass Screens

Slimline Bath Replacement Tray

Slimline bath replacement trays are available and can be cut to length with 1 end cap supplied, providing a practical alternative to traditional baths while maintaining a low-level installation.

1700mm tray trimmable length to 1200mm including 110mm end cap (comes with 1x end cap).

Code
[SL3517075/CWEC](#)

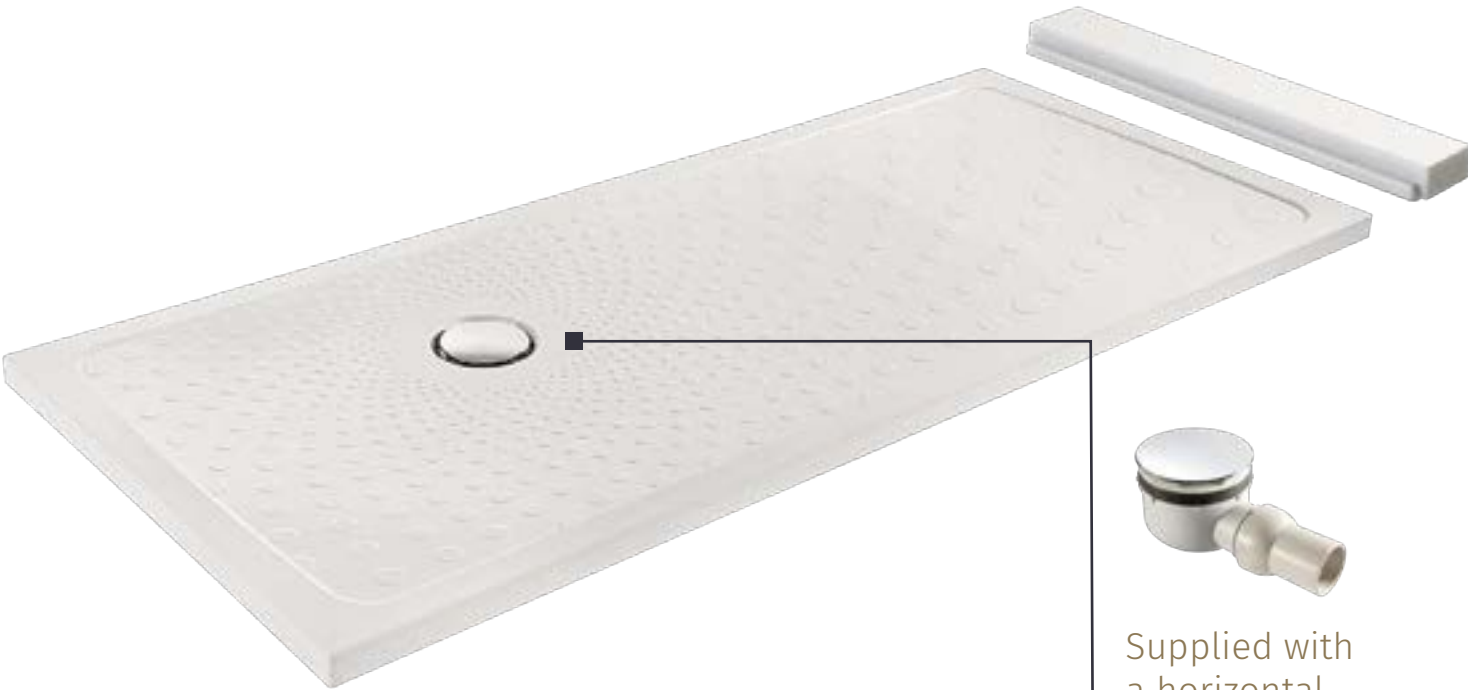

Supplied with a horizontal gravity drain



Versatile installation
The Slimline range can be recessed into the floor for a complete level-access installation.

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test

Bath Replacement Tray

Designed to replace all bath sizes

These have been designed to cover all the sizes to replace a bath, whilst still offering a low-level installation at only 40mm high. These can also be recessed into the floor.

1700mm tray, trimmable to 1220mm length, including 1x 135mm end cap as standard.

Maximum gravity flow rate of 33 l/min, (tray size dependent). Pumped flow rate up to 8 l/min. 90 mm drain aperture.

Supplied with a horizontal gravity drain as standard or compatible with all other drain options, see page 138.


Key features

- 40mm tray depth
- Gravity flow rate up to 33 l/min (tray size dependent and pumped flow rate up to 8 l/min.
- Supports up to 250kg (39 stone)
- Matte, slip-resistant surface classified to DIN 51097 Class B
- Compatible with electric and mixer show


			Drain centre point	
Code	Length	Width	A	B
BRT129M	1200mm	900mm	600mm	200mm
BRT1775M/C	1700mm	750mm	300mm	200mm
BRT1785M/C	1700mm	850mm	300mm	200mm

Additional accessories

Code	Description
BRTM/EC75	750mm Tray end cap
BRTM/EC85	850mm Tray end cap

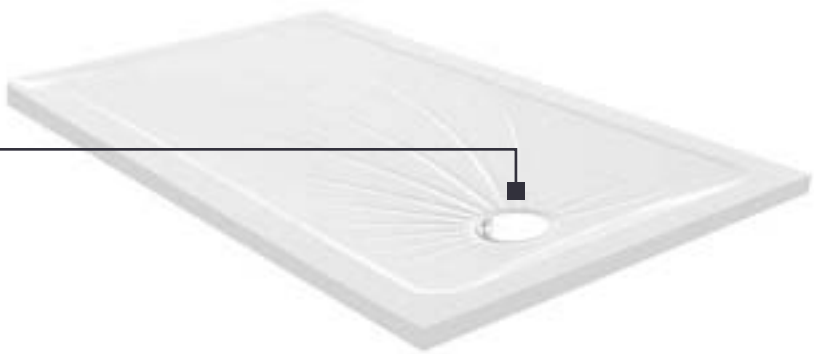

Supplied with a horizontal gravity drain

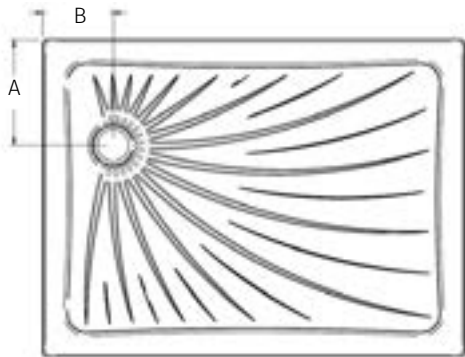

Self-adhesive Tiling Upstand included

Our Tiling Upstand guarantees a watertight seal between the wall tiling and the tray. Waterproof Self-Adhesive Tiling Upstand (3.5m roll - 120mm wide).

Code [US12350](#)

DIN 51097:1992 Determination of anti-slip properties; wet loaded barefoot areas; walking method; ramp test

Drainage for shower trays

Matched solutions for dependable results




Horizontal Gravity drainage is supplied as standard with all Impey shower trays. Where alternative solutions are required, Impey offers a comprehensive range of gravity, pumped and slimline drainage options to suit varying site conditions.

Options include horizontal and vertical outlets, pumped waste systems, and Slim+ waterless traps. All drainage solutions are designed for easy cleaning, long-term reliability and compliance with Building Regulations.

Impey shower trays requiring gravity drainage are supplied as standard with a compatible waste fitting. Where alternative outlet types are required, additional options can be specified to suit site conditions.

All tray drainage solutions are designed to:

- Deliver consistent flow rates
- Allow flexible pipe routing
- Support straightforward servicing and maintenance

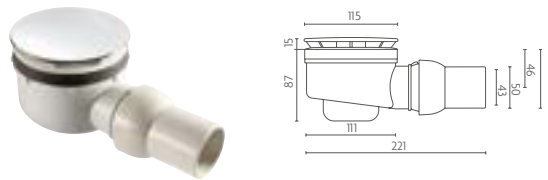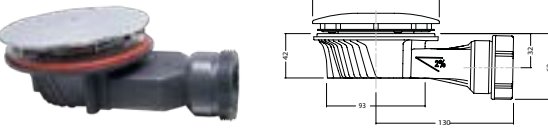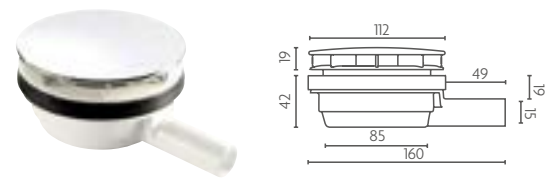	Name	Code	Waste	Outlet	Water Seal
	Horizontal Outlet	IMOR/HKIT	Gravity	43mm solvent weld	50mm water seal
	Vertical Outlet	IMOR/VKIT	Gravity	50mm solvent weld (60mm Adaptor)	50mm water seal
	Slim+ Waste	SLW2STCP/HKIT	Gravity	40mm compression	Silicone non return valve
	Pumped Waste	IMOR/PKIT	Pumped	15mm push fit	-

For dimensions and more information about our drainage products please **scan the QR code**.





Half Height Doors, Curtains, Rails, Glass Screens & Doors

Flexible screening solutions for every space

Impey's range of doors, curtain rails, shower curtains and portable screens provides practical, adaptable screening for wetrooms and shower tray installations.

HALF HEIGHT SHOWER DOORS

Elevate	Page 146
FreeGlide	Page 148
Half Height Door Specification	Page 150
Sliding Doors	Page 152
Single, Bi-fold and Tri-fold Doors	Page 154
Freestanding Carer Screens	Page 159

SHOWER CURTAINS & RAILS

Curtain Rails & Bridging Kit	Page 160
Shower Curtains	Page 162

GLASS SCREENS & DOORS

Supreme Glass Shower Panels	Page 164
-----------------------------	----------

Half Height Shower Doors

Comfort and care, designed into every detail

- Developed to support safe assisted showering and more dignified daily use
- Engineered for smooth, intuitive operation for users with limited grip mobility
- Wide opening access to improve access for wheelchair users and carers
- Colour contrast design on our Elevate doors for improved visibility
- Anti-glare finishes to support users with visual impairments
- Effective water retention with double contact seals
- Fast installation with minimal disruption
- Adjustable profiles and components for long-term performance
- Designed for installation efficiency and long-term serviceability
- Compatible with Impey wetroom floor formers, shower trays and bath replacement trays



To view our Elevate Half Height Doors video please **scan the QR code.**



Every aspect of Elevate has been considered with purpose. Designed and manufactured in the UK, and developed in conjunction with BEAB Care, Elevate reflects a rigorous approach to product development, where every feature has been carefully shaped around real-world use for our users, carers, specifiers and installers.

Ergonomic design

Elevate has been designed to feel intuitive and easy to use in everyday care environments. The system has been carefully developed to reduce effort, improve comfort and support smoother assisted showering for both users and carers.

Colour contrast

Colour contrast has been thoughtfully integrated to improve visibility and make key points of interaction easier to identify, helping to support safer, more confident use, particularly for visually impaired users.

Quality and detailing

Quality in every seam, junction and finishing detail. Clean lines, precise construction and carefully resolved components help create a door system that looks considered, performs reliably and stands up to the demands of long-term use.



Lifetime Guarantee



Tested to BS EN 14428



Manufactured in the UK

Half Height Shower Doors

Designed and manufactured in the UK for assisted showering

Impey's Half Height Shower Doors set the standard for accessible showering. Designed and manufactured in the UK by Impey, they deliver reliable performance, easy installation, and enhanced usability for both users and carers.

Suitable for wetrooms, shower trays, and bath replacement trays, these systems are widely specified across healthcare, residential, and supported living projects.

Why specify Impey Half Height Doors

- Proven, durable construction designed for long-term use
- Wide range of sizes & configurations as well as fully bespoke options
- Designed for safe, independent and assisted showering
- Suitable for corner and alcove layouts across multiple installation types
- Fast installation with minimal disruption
- Backed by technical support and a lifetime guarantee
- Manufactured in the UK



Designed for installation efficiency

- **Installation flexibility** – configured for both corner and alcove installations, with multiple layout options
- **Quick install** – average installation time of 20 minutes
- **Floor to Ceiling Pole** - TigerFix adhesive floor fixing, no drilling required
- **Adjustable profiles** – accommodates uneven walls
- **Door height setting tool** – ensures accurate clearance for door seals
- **Serviceable components** – easy maintenance and replacement



For advice and support, please contact our Technical Team on 01460 256080 or visit impeyshowers.com



To view our Elevate Half Height Doors video please **scan the QR code**.

Floor and door compatibility

Seamless integration across Impey systems

Our fully compatible designs ensure a consistent specification across projects, simplifying design and installation.

Our Half Height Doors are compatible with:

- Wetroom floor formers (e.g. Level-Dec EasyFit)
- Shower trays (Radiate, Mendip, Mantis, Slimline)
- Bath replacement trays



Lifetime Guarantee



Tested to BS EN 14428



Manufactured in the UK

Elevate

Impeys revolutionary assisted lift door system

Raising the standards for folding and sliding doors, designed to improve access and minimise effort.

Key features

- Spring assisted 90° rotation paddle lifts door clear of the floor
- Ergonomic latch handle – no grip strength required
- Colour contrasting design to assist the partially sighted
- Anti-glare safety glazing supporting users with dementia
- Shatterproof PETG safety panels
- Quick-release door mechanism for easy cleaning
- Concealed fixings and internal glazing seals for an easy clean, hygienic finish
- Minimised water leaks with double contact floor seals



For advice and support,
please contact our
Technical Team on
01460 256080 or visit
impeyshowers.com



The Elevate Bifold Door



The Elevate Sliding Door



Lift-and-clear mechanism

Elevate paddle rotates 90° to lift the doors clear of the floor. The Elevate door rises to provide a 15mm gap from the bottom of the seal to the top of the shower tray or vinyl floor.



Channel floor moulding options

Elevate doors come as standard with two wall channel moulds to install on vinyl flooring or onto a shower tray.



Quick-release sliding mechanism

Unique sliding door clip mechanism with no tools required for cleaning and hygiene.



Bi-fold latch lock system

Our Bi-fold doors are designed with a latch handle to lock the door in place.



Space saving Bi-Fold design

Bi-fold doors can be folded back for wider openings and convenient storage, with a folded dimension of 70mm from the wall.

To view our Elevate Half Height Doors video please
scan the QR code.



Lifetime Guarantee



Tested to BS EN 14428



Manufactured in the UK

FreeGlide

Smart design, made affordable

Our most cost-effective range of doors designed for ease of use and simple maintenance.

Key features

- Easy to use - no grip strength required
- Rising butt hinge improves water retention
- Shatterproof PETG safety panels
- Anti-glare safety glazing supporting users with dementia
- Concealed fixings and internal glazing seals for an easy clean, hygienic finish
- Double contact floor seals to minimise water leaks



For advice and support, please contact our Technical Team on 01460 256080 or visit [impeyshowers.com](https://www.impeyshowers.com)



The FreeGlide Sliding Door



The FreeGlide Bifolding Door



Channel floor moulding options

FreeGlide doors come as standard with two wall channel moulds to install on vinyl flooring or onto a shower tray.



Lift-and-clear

When the door is open, the FreeGlide design provides a 10mm gap from the bottom of the seal to the top of the shower tray or vinyl floor.



Quick-release sliding mechanism

Unique sliding door clip mechanism with no tools required for cleaning and hygiene.



Space saving Bi-Fold design

Our Bi-fold doors are designed with a latch handle to lock the door in place.



Double contact seals

The double contact floor seals minimise potential water leaks.

To view our FreeGlide Half Height Doors video please scan the QR code.



Lifetime Guarantee




Tested to BS EN 14428



Manufactured in the UK


Half Height Door Handing

All configurations are available **left- or right-handed** and can be tailored to suit specific project requirements. Refer to the room set diagram when deciding which handing is required.

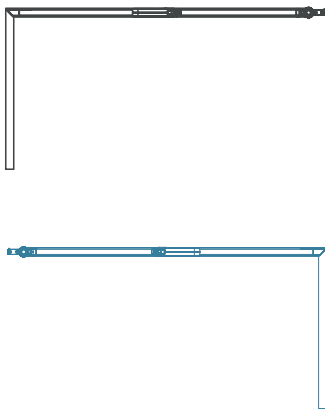

Left Handed Half Height Door

Right Handed Half Height Door

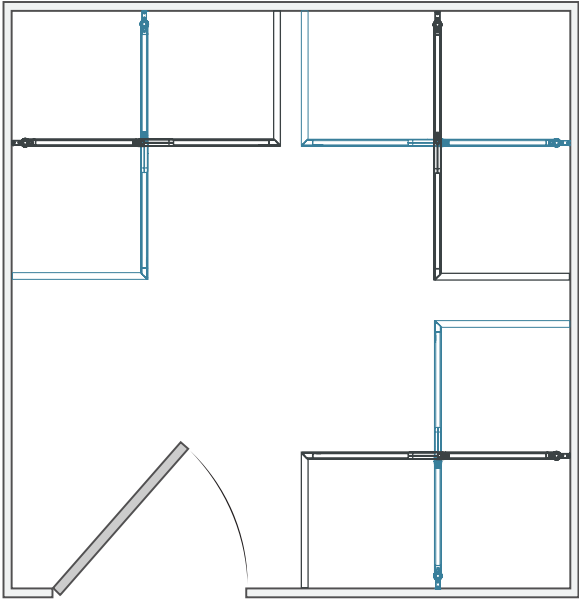

Roomset diagram

Half Height Door Height

All doors and fixed panels are 750mm high as standard.



750mm

Bespoke Configuration Service

Impey offer a bespoke service for both configuration layouts and door heights.

Please refer to the maximum bespoke height options available:

- **Fixed panel**
maximum height 1850mm
- **Sliding door and single door**
maximum height 750mm
- **Bifold door**
maximum height 900mm

For bespoke configurations please contact our technical support team and supply your drawings and dimensions at technicalsupport@coram.uk or on 01460 256080.

Measuring your Half Height Doors

Elevate and Freeglide half height doors feature a **±10mm adjustment per wall channel**, allowing for out-of-true walls. The design has a 10mm upward and 10mm downward adjustment per wall channel.

Example

Installation Configuration	Adjustment range	Wall channel
Fixed panels	+10mm adjustment	1 wall channel
Corner installations	±20mm adjustment	2 wall channels
Alcove installations	±20mm adjustment	2 wall channels


Measuring Instructions

When selecting the correct door size, customers must take the following factors into account to identify the appropriate nominal width:


- **Finished tile-to-tile width of the opening**
- **Allowance for shower tray rebating or wall coverings**

Please note

Please measure the opening at three points (top, middle, and bottom) using the smallest finished measurement to confirm the selected door size falls within the allowable adjustment range.

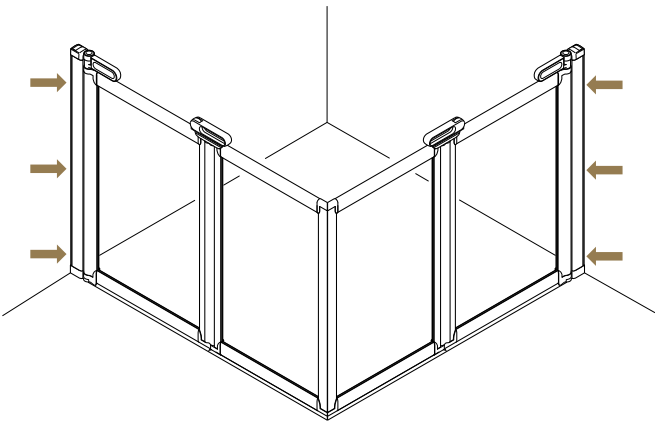


Corner installation

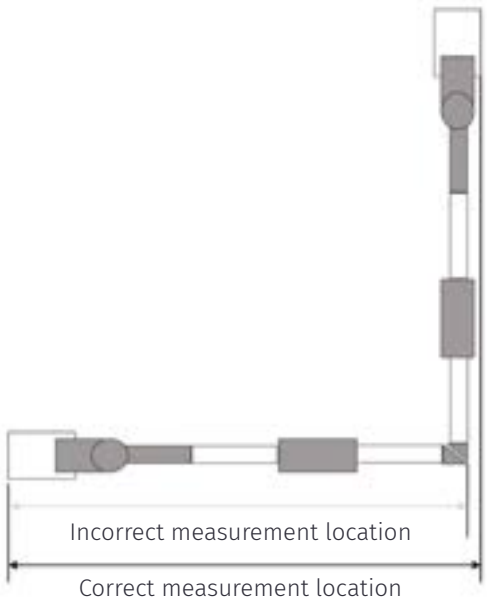

Incorrect measurement location

Correct measurement location

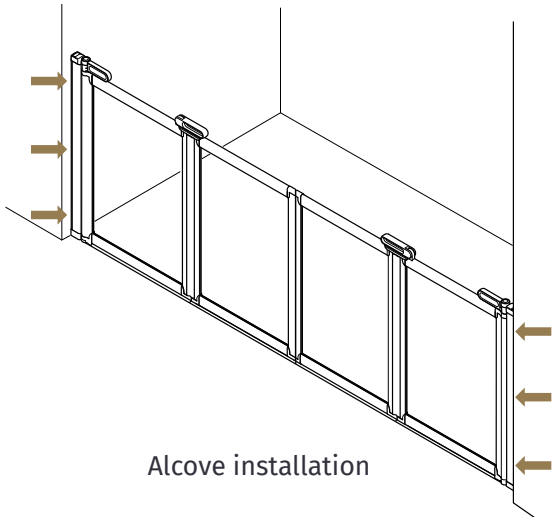

Alcove installation



Lifetime Guarantee















Manufactured in the UK



For advice and support please contact the Impey technical team on 01460 256080 or visit www.impeyshowers.com

Sliding Doors

Option 1			Pair of sliding doors meeting on corner.
Option 2			Sliding door hung off one side latching on opposite wall.
Option 3			Fixed half height panel with floor to ceiling pole and sliding door hung from opposite wall.
Option 4			Pair of sliding doors meeting in centre.
Option 5			Fixed half height panel with floor to ceiling pole and sliding door hung off pole, latching on opposite wall.
Option 6			Fixed half height panel with floor to ceiling pole with pair of sliders meeting a return pair of sliders on the corner.

Please note - Ordering the correct nominal door size is the responsibility of the customer. Doors cannot be re-sized outside of the stated adjustment limits. All Impey Half Height Doors are manufactured to order with your specific measurements. When ordering, please refer to the 'Overall Adjustment Range' column to ensure your measurements fit within the stated size ranges. All minimum and maximum sizes refer to finished wall-to-wall dimensions. All images show a left hand door. All doors and fixed panels are 750mm high as standard, bespoke options are available.

Elevate Code	FreeGlide Code	Configuration	A			B			Handing
			Minimum	Maximum	Overall Adjustment Range	Minimum	Maximum	Overall Adjustment Range	
EL-1	FG-1	Corner	650mm	1500mm	640mm - 1510mm	650mm	1500mm	640mm - 1510mm	LH/RH
EL-2	FG-2	Alcove	650mm	1500mm	630mm -1520mm	-	-	-	LH/RH
EL-3	FG-3	Alcove	850mm	2600mm	840mm - 2620mm	-	-	-	LH/RH
EL-4	FG-4	Alcove	1300mm	3000mm	1280mm - 3020mm	-	-	-	LH/RH
EL-5	FG-5	Alcove	850mm	1500mm	840mm - 2620mm	-	-	-	LH/RH
EL-6	FG-6	Corner	850mm	2600mm	840mm - 2620mm	650mm	1500mm	640mm - 1510mm	LH/RH



Lifetime Guarantee















Manufactured in the UK



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Single, Bi-fold and Tri-fold Doors

Option C			Fixed half height 750mm panel with floor to ceiling pole.
Option D			Fixed half height panel with floor to ceiling pole, 2 single doors and one fixed half height panel on return.
Option E			Fixed half height panel with floor to ceiling pole and a pair of bi-fold doors meeting on corner.
Option F			Two half height fixed panels, 2 single doors meeting on the corner.
Option G			Pair of bi-fold doors meeting in centre.
Option H			Pair of bi-fold doors meeting on corner.
Option J			Bi-fold and single door meeting on corner.

Please note - Ordering the correct nominal door size is the responsibility of the customer. Doors cannot be re-sized outside of the stated adjustment limits. All Impey Half Height Doors are manufactured to order with your specific measurements. When ordering, please refer to the 'Overall Adjustment Range' column to ensure your measurements fit within the stated size ranges. All minimum and maximum sizes refer to finished wall-to-wall dimensions. All images show a left hand door. All doors and fixed panels are 750mm high as standard, bespoke options are available.

Elevate Code	FreeGlide Code	Configuration	A			B			Handing
			Minimum	Maximum	Overall Adjustment Range	Minimum	Maximum	Overall Adjustment Range	
EL-C	FG-C	Alcove or Corner	200mm	1100mm	200mm - 1110mm	-	-	-	LH/RH
EL-D	FG-D	Corner	800mm	3100mm	790mm - 3110mm	200mm	1100mm	200mm - 1110mm	LH/RH
EL-E	FG-E	Corner	750mm	2600mm	740mm - 2620mm	550mm	1500mm	560mm - 1510mm	LH/RH
EL-F	FG-F	Corner	500mm	2100mm	490mm - 2110mm	500mm	2100mm	500mm - 2110mm	LH/RH
EL-G	FG-G	Alcove	1100mm	3000mm	1080mm - 3020mm	-	-	-	LH/RH
EL-H	FG-H	Corner	550mm	1500mm	540mm - 1510mm	550mm	1500mm	540mm - 1510mm	LH/RH
EL-J	FG-J	Corner	550mm	1500mm	540mm - 1510mm	300mm	1000mm	290mm - 1010mm	LH/RH



Lifetime Guarantee















Manufactured in the UK



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Single, Bi-fold and Tri-fold Doors

Option K			Pair of single doors meeting in centre.
Option M			Fixed half height panel with floor to ceiling pole with bi-fold door meeting in centre.
Option N			Fixed half height panel with floor to ceiling pole with tri-fold door.
Option P			Pair of single doors meeting on corner.
Option R			Fixed half height panel with floor to ceiling pole with bi-fold door.
Option S			Bi-folding doors.

Please note - Ordering the correct nominal door size is the responsibility of the customer. Doors cannot be re-sized outside of the stated adjustment limits. All Impey Half Height Doors are manufactured to order with your specific measurements. When ordering, please refer to the 'Overall Adjustment Range' column to ensure your measurements fit within the stated size ranges. All minimum and maximum sizes refer to finished wall-to-wall dimensions. All images show a left hand door. All doors and fixed panels are 750mm high as standard, bespoke options are available.

Elevate Code	FreeGlide Code	Configuration	A			B			Handing
			Minimum	Maximum	Overall Adjustment Range	Minimum	Maximum	Overall Adjustment Range	
EL-K	FG-K	Alcove	600mm	2000mm	580mm - 2020mm	-	-	-	LH/RH
EL-M	FG-M	Alcove	750mm	2600mm	740mm - 2620mm	-	-	-	LH/RH
EL-N	FG-N	Corner	200mm	1100mm	200mm - 1110mm	825mm	1700mm	815mm - 1710mm	LH/RH
EL-P	FG-P	Corner	300mm	1000mm	290mm - 1010mm	300mm	1000mm	290mm - 1010mm	LH/RH
EL-R	FG-R	Corner	200mm	1100mm	200mm - 1110mm	550mm	1500mm	540mm - 1510mm	LH/RH
EL-S	FG-S	Alcove	550mm	1500mm	490mm - 1510mm	-	-	-	LH/RH



Lifetime Guarantee











Manufactured in the UK



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Single, Bi-fold and Tri-fold Doors

Option T			Bi-fold door meeting single door.
Option V			One tri-fold meeting one bi-fold on the corner.
Option W			One tri-fold door.
Option X			Pair of single doors meeting a fixed panel with floor to ceiling pole on the corner.

Extension Channel Pack

Simple adjustment for a precise fit

The Extension Channel Pack provides a practical solution for increasing the width of a door or fixed panel from the wall, helping to accommodate site tolerances and achieve a precise installation.

Each pack extends the width by 20mm, with multiple channels able to be combined for greater adjustment where required.

Supplied complete with a wall channel, end cap and fixings, the kit ensures a straightforward installation and a clean, professional finish.

Extension Channel Pack **Code FG-ECP**

Floor to Ceiling Extension Pole (1355mm - for a maximum achievable height of 3100mm) **Code FCP-EXT**



Please note - Ordering the correct nominal door size is the responsibility of the customer. Doors cannot be re-sized outside of the stated adjustment limits. All Impey Half Height Doors are manufactured to order with your specific measurements. When ordering, please refer to the 'Overall Adjustment Range' column to ensure your measurements fit within the stated size ranges. All minimum and maximum sizes refer to finished wall-to-wall dimensions. All images show a left hand door. All doors and fixed panels are 750mm high as standard, bespoke options are available.

Elevate Code	FreeGlide Code	Configuration	A			B			Handing
			Minimum	Maximum	Overall Adjustment Range	Minimum	Maximum	Overall Adjustment Range	
EL-T	FG-T	Alcove	850mm	2700mm	840mm - 2710mm	-	-	-	LH/RH
EL-V	FG-V	Corner	825mm	1700mm	815mm - 1710mm	550mm	1500mm	540mm - 1510mm	LH/RH
EL-W	FG-W	Alcove	825mm	1700mm	815mm - 1710mm	-	-	-	LH/RH
EL-X	FG-X	Corner	600mm	2000mm	590mm - 2010mm	200mm	1100mm	200mm - 1110mm	LH/RH

Freestanding Half Height Shower Door

Lightweight and portable, these screens offer a simple, non-permanent solution for creating showering areas. Designed for convenience, they can be positioned quickly and folded away when not in use, making them ideal for adaptable environments.



Freestanding Screen 2 panel 650mm **Code FG-IPS1W**

Freestanding Screen 2 panel 750mm **Code FG-IPS2W**

Freestanding Screen 2 panel 1000mm **Code FG-IPS3W**

Freestanding Screen 4 panel 2x 400mm wide = 2x 225mm wide **Code FG-IPS4W**



Lifetime Guarantee




Manufactured in the UK




For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Curtain Rails


Manufactured from white powder-coated aluminium, all rails are supplied complete with fixing kits — including brackets, ceiling supports, screws, wall plugs and curtain hooks and gliders.

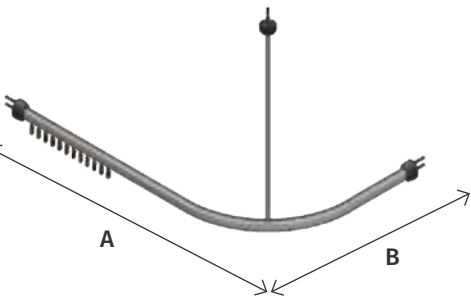


Curved Rail	Dimensions	
Code	A	B
SRL-9090W	900mm	900mm
SRL-120120W	1200mm	1200mm
SRL-13090W	1300mm	900mm
SRL-15090W	1500mm	900mm
SRL-150120W	1500mm	1200mm
SRL-18090W	1800mm	900mm
SRL-SPECIAL	Made to size	

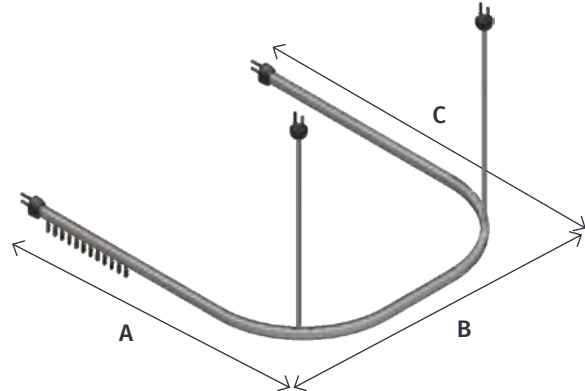

U Curtain Rail	Dimensions		
Code	A	B	C
SRU-100100W	950mm	900mm	950mm
SRU-120120W	1140mm	1092mm	1140mm
SRU-13080W	750mm	1200mm	750mm
SRU-14090W	850mm	1300mm	850mm
SRU-150120W	1150mm	1400mm	1150mm
SRU-SPECIAL	Made to size		

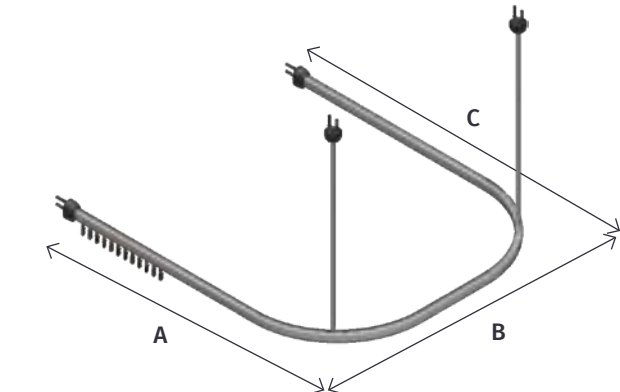

Stand-alone U Curtain Rail	Dimensions		
Code	A	B	C
SRUT-9090W	900mm	900mm	900mm
SRUT-100100W	1000mm	1000mm	1000mm
SRUT-120120W	1200mm	1200mm	1200mm
SRUT-13080W	1300mm	800mm	800mm
SRUT-150120W	1500mm	1200mm	1200mm

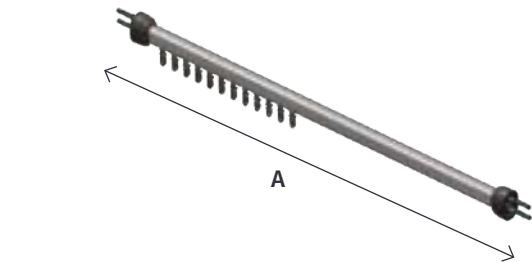


Straight Curtain Rail	Dimensions
Code	A
SRS-130W	1300mm
SRS-200W	2000mm
SRS-250W	2500mm
SRS-SPECIAL	Made to size

Curved Rail Support Rod

1200mm curtain rail support rod with fixing kit

Code	Length
SR-CRSW	1200mm

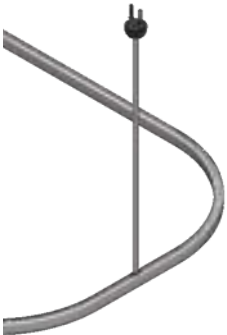

Window Bridging Kit


Where windows obstruct standard rail installation, the Window Bridging Kit provides a simple, professional solution.

Suitable for:


- Inside window openings
- Outside window openings
- Dog-leg installations

Quick to install, supplied complete with rail, curtain, brackets and fixings.


Code SR-WBKW

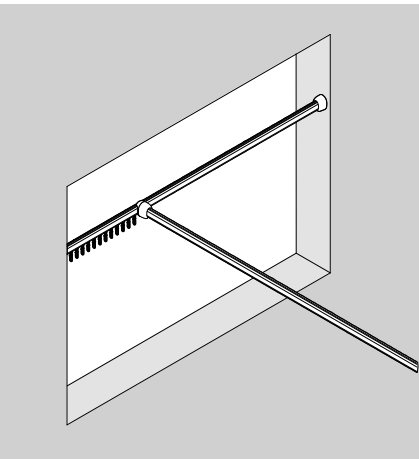

Alcove Bridging Kit

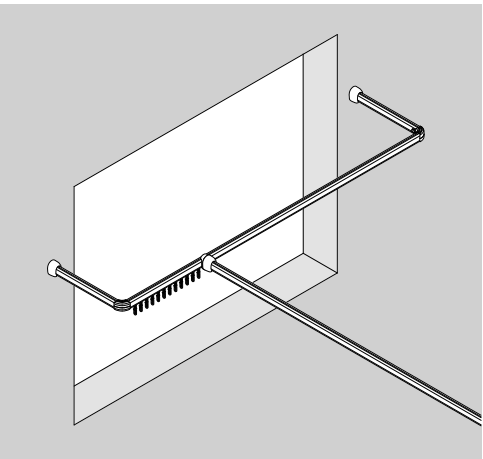

Outer Window Bridging Kit

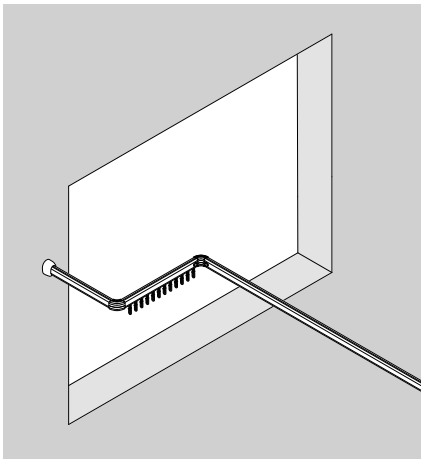

Dog Leg Installation Window Bridging Kit



Shower Curtains

Designed for demanding care environments, Impey shower curtains are durable, hygienic and easy to maintain. A practical, long-lasting solution for wetroom installations.

Key features

- Proseal® coated fabric for excellent water repellence
- Hygiene ‘n’ Clean anti-microbial treatment
- Machine washable
- Weighted, non-toxic hem to prevent cling
- Corrosion-resistant eyelets
- Available in white and grey (selected sizes)

Available in two colours:



White



Grey

White curtains

Code	Width	Drop	Eyelets
IC1212	1200mm	1200mm	8
IC181250	1800mm	1250mm	12
IC1818	1800mm	1800mm	12
IC1820	1800mm	2000mm	12
IC1824	1800mm	2400mm	12
IC2018	2000mm	1800mm	14
IC2020	2000mm	2000mm	14
IC2022	2000mm	2200mm	14
IC2121	2100mm	2100mm	12
IC2218	2200mm	1800mm	14
IC2220	2200mm	2000mm	14
IC2222	2200mm	2200mm	14
IC2418	2400mm	1800mm	16
IC2420	2400mm	2000mm	16
IC181250	1800mm	1250mm	12

Grey curtains

Code	Width	Drop	Eyelets
IC1820	1800mm	2000mm	12
IC2020	2000mm	2000mm	14
IC2420	2400mm	2000mm	16




For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**

Spare Hooks and Gliders

Pack of 24 hooks and gliders.

Code **SR-HGK**



Manufactured in the UK



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Supreme Glass Shower Panels

Luxury design with practical performance

Supreme Glass Shower Panels create a clean, contemporary showering space while maintaining the accessibility and practicality required for both wetrooms and shower trays.

The glass panel is supported by a chrome or polished aluminium column, creating a strong and elegant structure while maintaining a minimal visual footprint.

Supreme Glass Panels can be configured to suit a wide range of shower layouts, including walk-in and walk-through designs. Suitable for both domestic and healthcare environments.

Key features

- Minimalist frameless appearance
- 2000mm high glass panel for improved splash protection
- 8mm toughened safety glass
- Easy clean coating - Aqua-Shield
- Telescopic pole, height adjustment 2027mm to 2700mm
- TigerFix adhesive floor fixing, no drilling required
- Fast, clean installation, easily removable
- Pre-drilled wall profile with 20mm adjustment
- All fixings and seals included
- CE compliant to BS EN 14428

Floor to Ceiling Pole Screen

Width	Code	Adjustment range
700mm	ISS70CUC	716mm - 736mm
800mm	ISS80CUC	816mm - 836mm
900mm	ISS90CUC	916mm - 936mm
1000mm	ISS10CUC	1016mm - 1036mm
1200mm	ISS12CUC	1216mm - 1236mm

Wall Braced Screen

Width	Code	Adjustment range
700mm	ISSW70CUC	716mm - 736mm
800mm	ISSW80CUC	816mm - 836mm
900mm	ISSW90CUC	916mm - 936mm
1000mm	ISSW10CUC	1016mm - 1036mm
1200mm	ISSW12CUC	1216mm - 1236mm

Additional Accessories

Description	Code
Floor to ceiling pole - walk through configuration	IASCT2000
Full height vinyl floor coving profile	ICEP2000




Configurations


Walk-through*




Single panel corner



Two panels corner**



Single panel alcove



* Requires purchase of additional pole. ** Recommended 500mm for ease of access.



Lifetime Guarantee



Manufactured in the UK



Aqua-Shield
Easy Clean Finish



Shower Seats & Benches

Wall-mounted and freestanding options

A shower seat is an essential element of many bathroom adaptations. Before selecting a product, the size and layout of the shower area and the specific needs of the user should be carefully assessed. Considerations include ease of use, wheelchair transfer, reducing risk of injury, cushioning needs, comfort and warmth, as well as cleaning and aesthetics.

Slimfold Shower Seats & Benches
Shower Seats & Chairs

Page 168

Page 172

SlimFold range

Shower Seats and Benches


Thoughtfully designed for both style and practicality, the SlimFold range offers a sleek, space-saving solution that blends strength and ergonomic usability with hygiene, effortless cleaning and maintenance.

Key features

- Slim, wall-hugging design with a folded projection of just 114mm
- Rounded, smooth polyethylene seat provides natural cushioning and feels warm to the touch
- Seat angled at 4° to allow water to drain away
- No drop-down legs, eliminating trip hazards
- Easy-to-use fold-down mechanism designed to prevent accidental deployment
- Corrosion-resistant steel construction
- Hygienic solid surfaces with no dirt traps
- Can be installed as low as 415mm
- Maximum user weight 300kg (47 stone)

Wall fixings not included – suitable wall fixings to be selected and supplied by the installer.

SlimFold Seat fold down mechanism

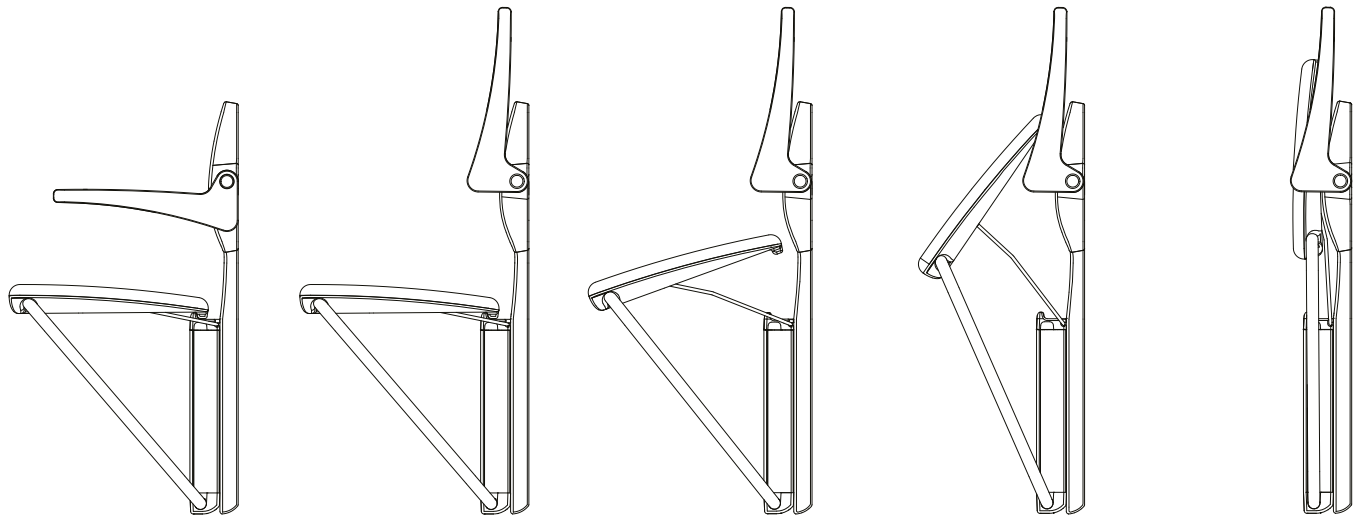

SlimFold Shower Seat



SlimFold Shower Bench

Rounded, smooth seats made from flexible polyethylene provide natural padding as well as being comfortable and warm to the touch

No drop down legs eliminating the trip risk for users

Top of the seat is angled back at 4° to allow water to run off the back



Lifetime Guarantee



Manufactured in the UK

SlimFold Shower Seat & Bench

The SlimFold Shower Seat is available either as a full seat with backrest and arms, or as a bench.

When folded, the seat displays the attractive top surface rather than the underside, improving both appearance and safety. The seat cannot accidentally drop down if knocked. To deploy, simply pull the front edge forward so the rear of the seat slides down, then fold the arms down neatly into place.

Cross-braced wall supports remove the need for floor-standing legs, reducing trip risks and preventing damage to the floor. This also allows installation at lower heights where required.

Manufactured in Britain using high-quality corrosion-resistant materials, the SlimFold range combines comfort, durability and modern design.

SlimFold Shower Seat


All seats supplied with white wall-fixed back.

- 


White Stone
SFS250WWS
- 

Grey
SFS250WGY
- 

Black Granite
SFS250WBG
- 

Sandstone
SFS250WSS
- 

Sky Blue
SFS250WSB

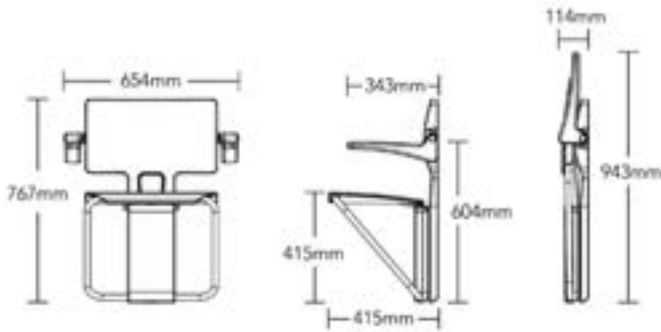

Overall size			Seat size				Distance from wall in raised position		Arm size		
Width	Depth	Height	Width	Depth	Length	Height	Height	Depth	Height	Inner	Outer
654mm	415mm	767mm	500mm	365mm	343mm	604mm	845mm	63mm	415mm	543mm	660mm

Independently tested to BS12182 and BS12727.
Patent number: GB 2497432.
N.B. Colours are as accurate as the printing process allows.

“

Cross-braced wall supports remove the need for floor-standing legs, reducing trip risks and preventing damage to the floor. This also allows installation at lower heights where required.

SlimFold Shower Bench

All seats supplied with white wall-fixed back.

- 


White Stone
SFB250WWS
- 

Grey
SFB250WGY
- 

Black Granite
SFB250WBG
- 

Sandstone
SFB250WSS
- 

Sky Blue
SFB250WSB

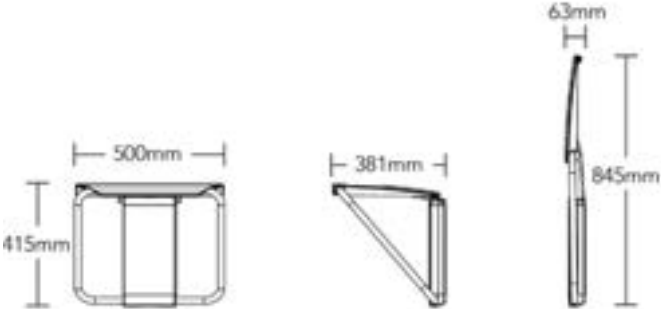

Overall size			Seat size		Distance from wall in raised position	
Width	Depth	Height	Width	Depth	Height	Depth
500mm	381mm	415mm	500mm	365mm	845mm	63mm




Shower Seats & Chairs

All seats feature robust construction, durable powder-coated frames and adjustable installation heights. Detachable plastic seat covers allow easy cleaning. Unless stated otherwise, seats have a maximum user weight of 30 stone (190kg). Some models require minimal assembly. All shower seats come as standard with a 12 month guarantee.


Deluxe Padded Fold Down Shower Seat

Code: **S1/P**

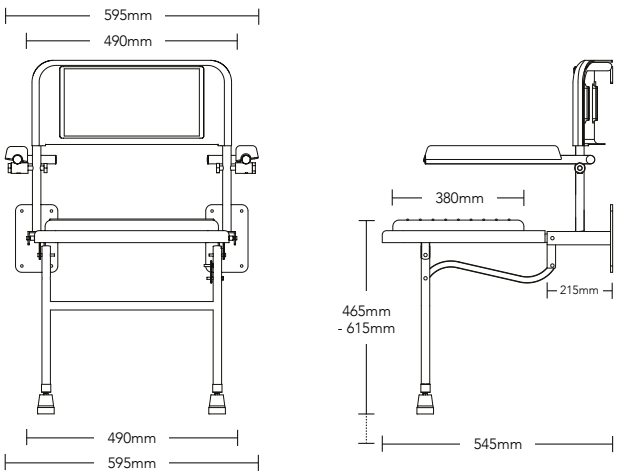


Fold Down Shower Seat

Code: **S2/**

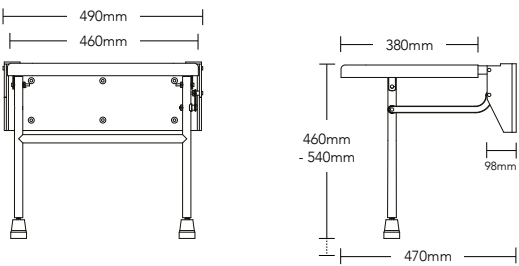


Deluxe Fold Down Shower Seat

Code: **S1/**

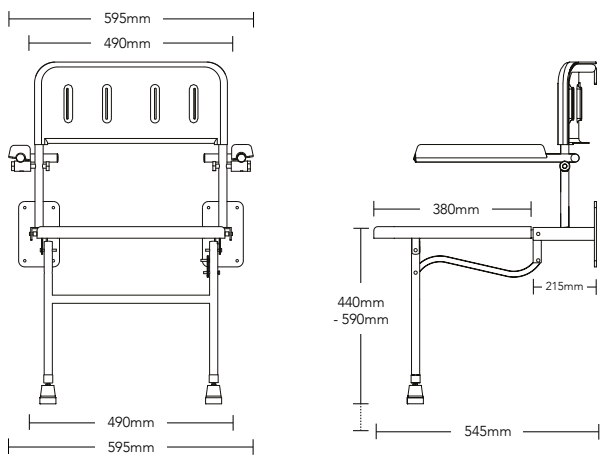

Padded Fold Down Shower Seat

Code: **S2/P**

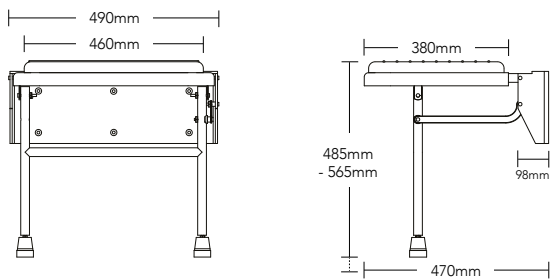


Colour	Code	Overall size (WxD)		Seat size (WxDxH)			Arm size (Inner x Outer)		Distance from wall in rasied position	Max weight limited
White	S1/	595mm	545mm	490mm	380mm	465mm to 615mm	490mm	595mm	215mm	190kg (30 stone)
White with grey padded arms and seat	S1/P	595mm	545mm	490mm	380mm	465mm to 615mm	490mm	595mm	215mm	190kg (30 stone)

Colour	Code	Overall size (WxD)		Seat size (WxDxH)			Distance from wall in raised position	Max weight limited
White	S2/	490mm	470mm	460mm	380mm	460mm to 540mm	98mm	190kg (30 stone)
White with grey padded arms and seat	S2/P	490mm	470mm	460mm	380mm	460mm to 540mm	98mm	190kg (30 stone)


Wall fixings not included – suitable wall fixings to be selected and supplied by the installer.

Shower Seats & Benches

Wide Padded Fold Down Shower Seat
Code: S9

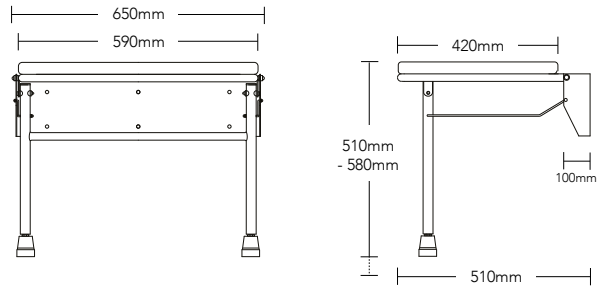

Freestanding Shower Chair
Code: S5/

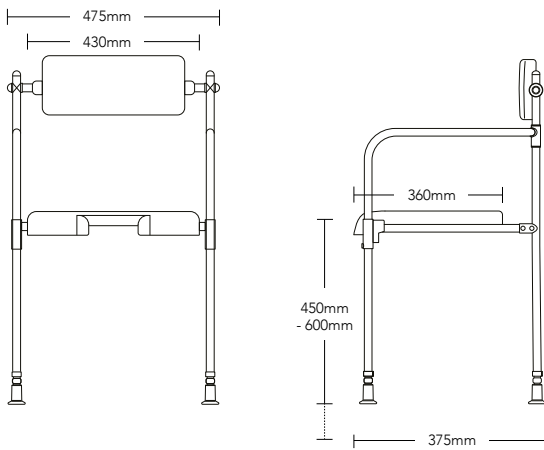

Colour	Code	Overall size (WxD)		Seat size (WxDxH)			Distance from wall in rased position	Max weight limited
White with blue padded seat	S9	650mm	510mm	590mm	420mm	510mm to 580mm	100mm	190kg (30 stone)
White	S5/	475mm	375mm	430mm	360mm	450mm to 600mm	n/a	95kg (15 stone)

Wall fixings not included – suitable wall fixings to be selected and supplied by the installer.





Showers & Pumps

Showers and pumps play an essential role in delivering a showering experience that feels reliable, comfortable and easy to manage. Impey's range is selected to support residential, accessible and care-led applications, helping specifiers and installers match performance to the needs of the space. Together, these solutions help complete a showering environment designed for confidence in everyday use.

SHOWERS

Electric Showers	Page 178
Mixer Showers	Page 182

PUMPED DRAINAGE & ACCESSORIES

Pumped Drainage	Page 184
Shower & Waste Pump Kits	Page 186
Shower & Waste Accessories & Spares	Page 188

Electric Showers



	MIRA Advance Flex 8.7kw / MIRA Advance Flex 9.8kw	MIRA Advance Flex Extra 8.7kw Bluetooth
Code	MIRAADVLEX87 / MIRAADVLEX98	MIRAADVLEXEXT87
Bluetooth	No	Yes
Switch connect	Yes	Yes
Hardwire	No	Yes
Compatible pumps	SWP	SWP/IMBT & SWP
Warranty	2 years	2 years
Audible aids	Clear, audible beeps for on/off and desired temperature reached. Audible clicks when turning the temperature dial.	Clear, audible beeps for on/off and desired temperature reached. Audible clicks when turning the temperature dial.
Visual aids	High contrast visuals & matte finish panel to support visual impairments	High contrast visuals and matte finish panel to support visual impairments
Sensory aids	Tactile features, light touch controls, easily accessible, high contrast on critical touch points	Tactile features, light touch controls, easily accessible, high contrast on critical touch points
Showerhead holder, hose, grab rail	Extra long, easy to use slide bar, with patented friction-grip showerhead holder	Extra long easy to use slide bar with patented friction-grip showerhead holder
Temperature & control safety	Thermostatic temperature stability: ± 1°C. 4 different maximum temperature settings (41°C - 48°C)	Thermostatic temperature stability: ± 1°C. 4 different maximum temperature settings (41°C - 48°C)
Phased shutdown	Phased shutdown flushes hot water from the tank making it safe for the next user	Phased shutdown flushes hot water from the tank making it safe for the next user
Anti-limescale technology	Mira Clearscale Pro™, market-leading anti-limescale technology	Mira Clearscale Pro™, market-leading anti-limescale technology
Easy set up	Simple set up, fast installation	Simple set up, fast installation
Maintenance	Easy filter access	Easy filter access
Fault diagnostics	Built-in fault diagnostics	Built-in fault diagnostics
Energy Efficiency	Class A	Class A
BEAB Care	BEAB Care approved	BEAB Care approved
BEAB	BEAB approved	BEAB approved
RNIB	RNIB approved Gold award	RNIB approved Gold award
Kiwa	Kiwa certified	Kiwa certified
WRAS	WRAS approved	WRAS approved
CE	-	-



	MIRA Advance Flex Low Pressure 9.0kw	Triton Omnicare Design Analogue 8.5kw / 9.5kw
Code	MIRAFLEX/LP90	TEOMND81 / TEOMND91
Bluetooth	No	No
Switch connect	Yes	Yes
Hardwire	No	Yes
Compatible pumps	SWP	SWP
Warranty	2 years	2 years
Audible aids	Audible beep for on/off, rotary lever with large loop and audible click	Audible feedback
Visual aids	Large backlit buttons	Looped lever for ease of operation
Sensory aids	Tactile on/off push button for ease of use, with select and forget function. Shower on demand.	Low resistance operation & soft press start/stop button. Single-hand operated handset holder - easy push system.
Showerhead holder, hose, grab rail	Easy to use slide bar and friction bracket which can be adjusted with one hand	2m anti-twist shower hose. Extended riser rail (940mm). Grab rail option.
Temperature & control safety	Thermostatic temperature control, adjustable temperature limit. 8 different maximum temperature settings (37°C - 48°C)	BEAB Care 41°C - Maintains water temperature within ±1°C for peace of mind. Factory Set - 43°C. Safeset® - 3 max temperature settings. Duration settings - 5, 10, 20, 30 minutes
Phased shutdown	Phased shutdown flushes hot water from the tank making it safe for the next user	-
Anti-limescale technology	Best in class anti-limescale technology, reduces build-up of limescale by up to 50%	-
Easy set up	-	-
Maintenance	4 spray showerhead for greater experience and rub-clean nozzles for easy cleaning	-
Fault diagnostics		-
Energy Efficiency	Class A	Class A
BEAB Care	-	BEAB Care approved
BEAB	BEAB approved	BEAB approved
RNIB	RNIB endorsed	RNIB endorsed
Kiwa	-	Kiwa certified
WRAS	WRAS approved BS EN ISO 9001:2008 BS EN ISO 14001:2004	NSF Reg 4 BSI Kitemark IP rating: IP25
CE	Complies with relevant European directives for CE marking	CE / UKCA

Electric Showers



	Triton Omnicare Design Digital 8.5kw / 9.5kw	Redring Selectronic Standard 8.5kw / 9.5kw
Code	TEOMNDD81 / TEOMNDD91	RSELA85S / RSELA95S
Bluetooth	Yes	No
Switch connect	Yes	Yes
Hardwire	Yes	Yes
Compatible pumps	SWP/IMBT & SWP	SWP
Warranty	2 years	3 years
Audible aids	Audible feedback	Audible adjustment
Visual aids		Large LED digital temperature display
Sensory aids	Low resistance operation & soft press start/stop button. Single-hand operated handset holder - easy push system	Push button controls for ease of operation & rapid commissioning
Showerhead holder, hose, grab rail	2m anti-twist shower hose. Grab rail option	5 spray modes shower head with easy rub-clean nozzles. STANDARD version - 1mtr anti-kink flexible shower hose, 540mm riser rail, soap dish and hose retainer PLUS version - 2mtr anti-kink flexible shower hose, 950mm riser rail, soap dish and hose retainer
Temperature & control safety	BEAB Care 41°C - Maintains water temperature within ±1°C for peace of mind. Factory Set - 43°C. Safeset® - 3 max temperature settings. Duration settings - 5, 10, 20, 30 minutes	BEAB care highly accurate, temperature control to +/- 0.5°C for a safe and comfortable showering experience. Maximum temperature lock limiter options of 41°C and 43°C selectable on installation. Temperature over ride facility
Phased shutdown	-	Phased shutdown safety protection for next user providing cool start up and scale protection
Anti-limescale technology	-	-
Easy set up	-	-
Maintenance	-	SmartFittm technology makes installation easy, thanks to multi-entry left right options for power and water
Fault diagnostics	-	-
Energy Efficiency	Class A	Class A
BEAB Care	BEAB Care approved	BEAB Care approved
BEAB	BEAB approved	BEAB approved
RNIB	RNIB endorsed	RNIB endorsed
Kiwa	Kiwa certified	-
WRAS	NSF Reg 4 BSI Kitemark IP rating: IP25	WRAS approved IP rating: IP25
CE	CE / UKCA	CE

	Redring Selectronic Plus 8.5kw / 9.5kw
Code	RSELA85P / RSELA95P
Bluetooth	No
Switch connect	Yes
Hardwire	Yes
Compatible pumps	SWP
Warranty	3 years
Audible aids	Audible adjustment
Visual aids	Large LED digital temperature display
Sensory aids	Push button controls for ease of operation & rapid commissioning
Showerhead holder, hose, grab rail	5 spray modes shower head with easy rub-clean nozzles. STANDARD version - 1mtr anti-kink flexible shower hose, 540mm riser rail, soap dish and hose retainer PLUS version - 2mtr anti-kink flexible shower hose, 950mm riser rail, soap dish and hose retainer
Temperature & control safety	BEAB care highly accurate, temperature control to +/- 0.5°C for a safe and comfortable showering experience. Maximum temperature lock limiter options of 41°C and 43°C selectable on installation. Temperature over ride facility
Phased shutdown	Phased shutdown safety protection for next user providing cool start up and scale protection
Anti-limescale technology	-
Easy set up	-
Maintenance	SmartFittm technology makes installation easy, thanks to multi-entry left right options for power and water
Fault diagnostics	-
Energy Efficiency	Class A
BEAB Care	BEAB Care approved
BEAB	BEAB approved
RNIB	RNIB endorsed
Kiwa	-
WRAS	WRAS approved IP rating: IP25
CE	CE

Mixer Showers



	MTMV2 Bar Mixer Shower	TMV3 Bar Mixer Shower
Code	TMV2KIT	TMV3KIT
Bluetooth	No	No
Flow Switch	Yes	Yes
Flow Sensor	Yes	Yes
Hard Wire	No	No
Warranty	5 years	5 years
Compatible pumps	SWP (additonal SWP/MX mixer valve conversion kit required) and SWP/IMP	SWP (additonal SWP/MX mixer valve conversion kit required) and SWP/IMP
Compatible systems	Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems	Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems
Audible aids	-	-
Visual aids	Bar type shower valve with independant control of temperature and flow	Bar type shower valve with independant control of temperature and flow
Sensory aids	Lever operated controls	Lever operated controls
Showerhead & holder, hose, grab rail	-	-
Temperature & control safety	Thermal cartridge technology, temperature stability of 38°C± 2°C. Fail safe protection on both the hot and cold supplies	Thermal cartridge technology, temperature stability of 41°C± 2°C. TMV3-compliant thermostatic control keeps the heat stable and protects users from the risks of sudden fluctuations in water flow temperature. Fail safe protection on both the hot and cold supplies
Operating pressure range	Operating pressure range of 0.2 to 5 bar	Operating pressure range of 0.2 to 5 bar
Shower valve	-	-
Easy cleaning	-	-
RNIB	-	-
TMV3	-	TMV3 approved - NHS D08
WRAS	WRAS approved	WRAS approved

Shower Fast Fix Brackets For Bar Showers (Pair)

Code [SR-HGK](#)



	MIRA Selectflex High Contrast
Code	MIRASELFLEXHC
Bluetooth	No
Flow Switch	Yes
Flow Sensor	Yes
Hard Wire	No
Warranty	5 years
Compatible pumps	SWP (additonal SWP/MX mixer valve conversion kit required) and SWP/IMP
Compatible systems	Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems
Audible aids	Audible click in response to temperature adjustment
Visual aids	High contrast graphics on key shower controls, anti-reflective surface finishing
Sensory aids	Push button actuation (on/off). Easy-grip, loop-handle lever for temperature and flow adjustment
Showerhead & holder, hose, grab rail	120 mm shower head with three spray modes. Extra-long slide bar offers flexible showering in seated or standing positions, while a patented low-friction holder enables easy, one-handed adjustment of shower head height.
Temperature & control safety	TMV3-compliant thermostatic control keeps the heat stable and protects users from the risks of sudden fluctuations in water flow temperature – integrated into our advanced Mira Nano-T valve cartridge. Temperature stability: 41°C+/- 2°C. Thermostatic shutdown within 2 seconds
Operating pressure range	Operating pressure range of 0.1 to 5 bar
Shower valve	Shower valve’s multi-fit design features adjustable inlet connections from 110 mm-155 mm pipe centres – enabling quick and easy replacement of almost any mixer shower using existing pipework. Valve shroud design covers all previous fixing holes and water entry points
Easy cleaning	Removable spray plate and soap dish tray for easy cleaning
RNIB	RNIB approved
TMV3	TMV3 approved - NHS D08
WRAS	WRAS approved

Wireless Pumped Drainage

Smarter control, simpler installation

Featuring Whale’s wireless technology, this solution enables seamless communication between the shower and pump. This ensures the pump responds instantly to water flow, improving efficiency while reducing noise and wear.

Key features

- Faster installation with minimal wiring
- Automatic flow matching for optimal drainage
- Reduced noise through intelligent pump control
- Built-in safety features to minimise flood risk

How It Works

An integrated system of sensors and controls ensures smooth operation:

- Flow sensors monitor water movement and communicate with the pump
- Transformer regulates pump activity and manages start/stop functions
- Pump unit adjusts speed in line with flow rate for efficient drainage
- Wireless connectivity enables real-time communication between components

This coordinated approach ensures water is removed quickly and quietly, even in challenging installations.



Whale Instant Match Bluetooth Pump



Whale Sense Kit

Product Code	Product Description	Electric Shower	Mixer Shower
MIRIM/BT	Mira Whale Shower & Pump Kit MIRAADVLEXEXT87 + SWP/IMBT	Yes	No
SWP/SENKIT2	Whale Sense Kit with TMV2 Shower	No	Yes
SWP/SENKIT3	Whale Sense Kit with TMV3 Shower	No	Yes



Mira Advance Flex Extra 8.7kw & Instant Match Bluetooth Pump

A fully integrated wireless solution, pairing a high-performance electric shower with an intelligent pump.

- Bluetooth ‘Easy Pair’ connectivity
- Automatic pump speed adjustment
- High-contrast, easy-to-use controls
- Multiple temperature settings for user safety
- Quiet operation with reduced vibration
- Two-way communication to prevent overflow or flooding

For further information on each product within this kit, go to:

- Mira Advance Flex Extra 8.7kw – please see page 178
- Instant Match Bluetooth Pump – please see page 187

Code: MIRIM/BT



Impey TMV2 / TMV3 & Whale Sense Kit

A dependable mixer shower solution with advanced sensing technology.

- Stable temperature control ($\pm 2^{\circ}\text{C}$)
- Fail-safe protection on hot and cold supplies
- Quiet, vibration-controlled pump operation
- Self-cleaning flow sensor technology
- Plug-and-play installation

For further information on each product within this kit, go to:

- TMV2 Bar Mixer Shower / TMV3 Bar Mixer Shower – please see page 182
- Whale Sense Kit – please see pages 187-189

TMV2 & Whale Sense Kit
Code: SWP/SENKIT2

TMV3 & Whale Sense Kit
Code: SWP/SENKIT3

Showers & Waste Pump Kits

Reliable drainage when gravity isn’t possible

Shower waste pump kits provide an effective drainage solution where gravity waste systems cannot be used. Designed for wetrooms and shower trays, the pump activates automatically when water flows to the shower, removing wastewater quickly and efficiently.

Each kit includes the components required for installation with a single-feed electric shower. For mixer showers, a Mixer Shower Conversion Kit is required.

Compatibility and installation

All pumped kits are suitable for wetroom floors or shower trays and include fittings required for standard installations.

Additional components may be required depending on the installation type:

- **Mixer Shower Conversion Kit (SWP/MX)** – for mixer shower compatibility
- **TAD13 shallow waste gully** – required when installing with wetroom floors.

Flexible drainage solutions

Impey offers a range of pump kits to suit different shower installations and performance requirements. All systems are designed for reliable operation and simple installation.

All Whale pump kits are supplied with a **3 year warranty**, extendable to **5 years with registration**.



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**



Whale Switch Connect Pump Kit	
Code	SWP
Whale Code	BP155BX
Features	Drainage up to 8l/min for electric showers or 12l/min for mixer showers (additional mixer valve conversion kit required SWP/MX) IP45 rated against moisture and particle ingress Active link diagnostics Analog control with 6 adjustable settings to suit electric showers, 12 settings to suit mixer showers High performance, draws 3 metres from gully CE marked and complies with European standards for EMC (Electromagnetic compatibility) LVE (Low voltage directive)
Warranty	5 years
Compatible showers	MIRA Advance Flex Extra (hardwired) Triton Omnicare Design Analogue (hardwired) Redring Selectronic Premier Plus (hardwired) Any electric shower when using external flow switch (SWPFS supplied in box) Any mixer shower when used with additional mixer valve conversion kit (SWP/MX)



Whale Instant Match Bluetooth Pump Kit	
SWP/IMBT	
SDP124TN	
Drainage up to 8l/min for electric showers	
IP45 rated against moisture and particle ingress	
Digital control with Bluetooth wireless technology	
Variable matched speed	
Built-in flood protection	
CE marked and complies with European standards for EMC (Electromagnetic compatibility) LVE (Low voltage directive)	
5 years	
Mira Advance Flex Extra (Bluetooth & hardwired)	
Triton Omnicare Design digital (Bluetooth & hardwired)	
Redring Selectronic Premier Plus (hardwired)	
Any electric shower when using external flow sensor (SWP/SIKA sold separately)	



Whale Instant Match Bluetooth Pump Kit	
SWP/IMP	
SDP303TX	
Drainage up to 12l/min for mixer showers	
IP45 rated against moisture and particle ingress	
Plug and play operation	
Automatically adjust the pump speed in relation to the flow rate of the shower	
Built-in flood reduction system (when used with Whale sense SWP/SEN)	
Quiet operation with built-in, acoustically tested anti-vibration mounts	
Self cleaning flow sensors	
CE marked and complies with European standards for EMC (Electromagnetic compatibility) LVE (Low voltage directive)	
5 years	
Any mixer shower using external flow sensors (SWP/SIKA)	



Whale Sense Unit*	
SWP/SEN	
SDA074T (755.800)	
Automatically shuts off water supply after preset period, reducing the risk of flood	
Added protection against flooding/increased water conservation	
Hands free operation when used with a passive infrared sensor (PIR to activate the solenoids, can also be operated with a reactive switch)	
Can be used with gravity or pumped drainage. Instant shutdown sequence during a power failure, further reducing risk of flooding.	
5 years	
Any mixer shower	
Bluetooth connectivity enabled when used with Whale instant match premium 9SDP303TX or Instant match (SDP134TN)	

*Unit only (solenoids and PIR sensor can be found in whale accessories page 189). For more information on the SENSE kit, refer to pages187-189.



Shower & Waste Accessories & Spares

A range of replacement components and accessories are available to support installation and maintenance

	Product Name & Description	Product Code	Whale Code
	Whale Transformer For SWP and SWP/WM	SWP/TMK2	SDS081T (755.210)
	Whale Instant Match Transformer Bluetooth/Instant match premium	SWP/IMTBT	SDS236T (755.699)
	Whale Pump Only	SWP/PO	SDS021T
	Whale Swp Flow Switch & Filter	SWPFS	AK1568
	Whale Mixer valve Conversion Kit	SWP/MX	AK1570
	Whale Sika Sensor	SWP/SIKA	SDS263T

	Product Name & Description	Product Code	Whale Code
	Whale Diaphragm + Tricuspid Valve	SWP/DT	SDS061T
	Whale Tricuspid Valves Bag Of 10	SWP/TV	SDS211B
	Whale Spare Pump Head	SWP/PH	SDS071T
	Whale Cover Top & Base For SWP Pump	SWP/COVER	SDS291T
	Whale Tray Trap For Pump Kit	SWP/D.TRAP	Z-755.108
	Ceiling Surface Movement Detector (for use with Whale sense)	PMSCSS	N/A
	15mm Solenoids (for use with Whale sense)	1175BC-12VDC	N/A





Grabrails, Handrails & Accessories

Strength you can rely on, design you can trust

Impey's grab rail and hand rail ranges are engineered to provide maximum support, durability and long-term reliability in accessible bathrooms and wetrooms. Developed with both users and installers in mind, each solution balances strength and comfort with ease of installation.

MaxiGrip Plus	Page 192
MaxiGrip	Page 194
Fluted Handrails	Page 196
Floor to Wall Handrail	Page 197
Floor to Ceiling Pole	Page 197
Fold Down Rails	Page 198
Boston Comfort & Safety Rails	Page 200

Maxi-Grip Plus

The strongest, most versatile hand rail system on the market

The Impey Maxi-Grip Plus redefines what a grab rail should be. Developed in partnership with the RNIB, it incorporates colour-contrast inserts to support visually impaired users while maintaining a clean, contemporary finish. The square design provides a better grip and stops the grab rail from rotating, while the aluminium core delivers maximum strength.

Key features

- Reinforced aluminium core
- Square profile for improved grip and reduced rotation
- Enhances tactile comfort with unique co-polymer extrusion
- Supports up to 150kg (23 stone)*
- Suitable for internal and external corners
- Four-point wall fixing for secure installation
- Modular kits available in 1.8m lengths for custom on-site configurations (trim to maximum 900mm for installation)


*Substrate and fixings dependent, to be supplied by the installer.



For advice and support, please contact our Technical Team on **01460 256080** or visit **impeyshowers.com**



Maxi-Grip Plus Hand Rail

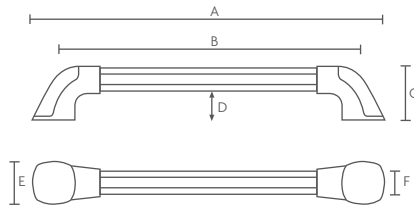


Code	Dimensions					
	A	B	C	D	E	F
IGS30G	358mm	300mm	77mm	44mm	62mm	35mm
IGS45G	508mm	450mm	77mm	44mm	62mm	35mm
IGS60G	658mm	450mm	77mm	44mm	62mm	35mm
IGS90G	957mm	900mm	77mm	44mm	62mm	35mm

Adjustable Angles

- Available in 90° and 45° options
- The 90° angle can be trimmed to 60° or 30°
- The 45° angle can be trimmed to 30°
- This patented design provides installers with maximum flexibility while maintaining structural integrity

Code	Dimensions	
	A	B
IGA45G	141mm	45°
IGA90G	152mm	90°

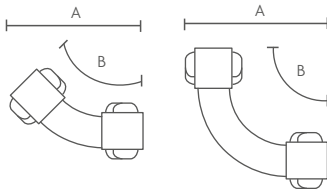

Maxi-Grip Plus Modular Kits

Maxi-Grip Plus provides installers with the ability to provide customised installations with multi-packs of rails, brackets and angle brackets that can be trimmed to size and angled on-site.

Code	Description
MGRG184	4x 1800mm maxi grip plus rails
MGEBG4	4x Maxi grip Plus End Brackets
MGCG4	4x Maxi grip Plus 90° Corners



For advice and support please contact the Impey technical team on **01460 256080** or visit **www.impeyshowers.com**

Maxi-Grip

Proven performance with reliable strength

The original Maxi-Grip with reinforced construction and ergonomic square profile provides a better grip and stops the grab rail from rotating, while the aluminium core delivers maximum strength. The unique co-polymer extrusion gives the rail corners a soft tactile quality for enhanced grip and comfort, making it a trusted solution in care environments.

Key features


- Reinforced aluminium core
- Square profile for improved grip and reduced rotation
- Enhances tactile comfort with unique co-polymer extrusion
- Supports up to 150kg (23 stone)*
- Suitable for internal and external corners
- Four-point wall fixing for secure installation
- Available in multiple straight lengths
- Available in white

*Substrate and fixings dependent, to be supplied by the installer.




Adjustable Angles

- Available in 90° and 45° options
- The 90° angle can be trimmed to 60° or 30°
- The 45° angle can be trimmed to 30°
- This patented design provides installers with maximum flexibility while maintaining structural integrity

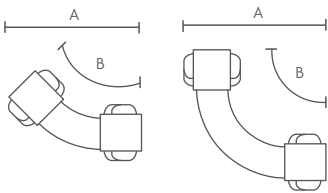

Code	Dimensions	
	A	B
IGA45W	141mm	45°
IGA90W	152mm	90°

Maxi-Grip Hand Rail

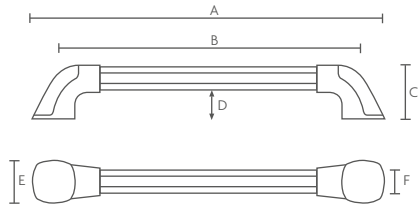


Code	Dimensions					
	A	B	C	D	E	F
IGC30W	358mm	300mm	77mm	44mm	62mm	35mm
IGC45W	508mm	450mm	77mm	44mm	62mm	35mm
IGC60W	658mm	450mm	77mm	44mm	62mm	35mm
IGC90W	957mm	900mm	77mm	44mm	62mm	35mm




Fluted Hand Rails

Manufactured from industrial-strength plastics with a satin finish, providing excellent grip in wet environments. Available in white and blue options as well as an angular option, (available in white only).

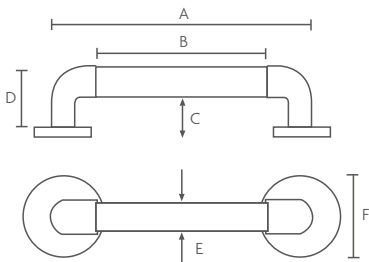

Fluted Hand Rails		Dimensions					
Code	Colour	A	B	C	D	E	F
IG1F	White	385mm	300mm	81mm	50mm	92mm	31mm
IG4F	White	538mm	450mm	81mm	50mm	92mm	31mm
IG5F	White	685mm	600mm	81mm	50mm	92mm	31mm
IG6F	White	997mm	915mm	88mm	53mm	82.5mm	35mm
IG1F/BLUE	Blue	385mm	300mm	81mm	50mm	92mm	31mm
IG4F/BLUE	Blue	538mm	450mm	81mm	50mm	92mm	31mm
IG5F/BLUE	Blue	685mm	600mm	81mm	50mm	92mm	31mm

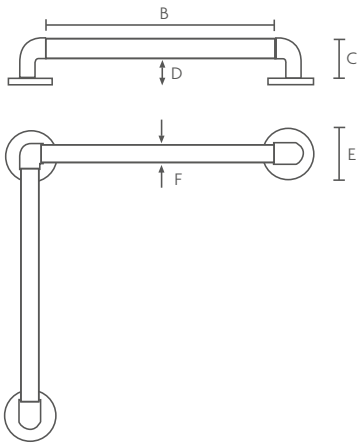


Angled Fluted Hand Rail			Dimensions					
Code	Colour	Width	A	B	C	D	E	F
IG8	White	600mm	685mm	600mm	81mm	50mm	92mm	31mm

Floor to Wall Hand Rail

Easy grip ribbed surface, manufactured from mild steel with a durable polyester finish.

Five screw fixing points per elbow to ensure secure installation, with snap-on cover plates for a neat, hygienic finish.

		Dimensions				
Code	Width	A	B	C	D	E
FWP	760mm	760mm	760mm	90mm	17mm	35mm

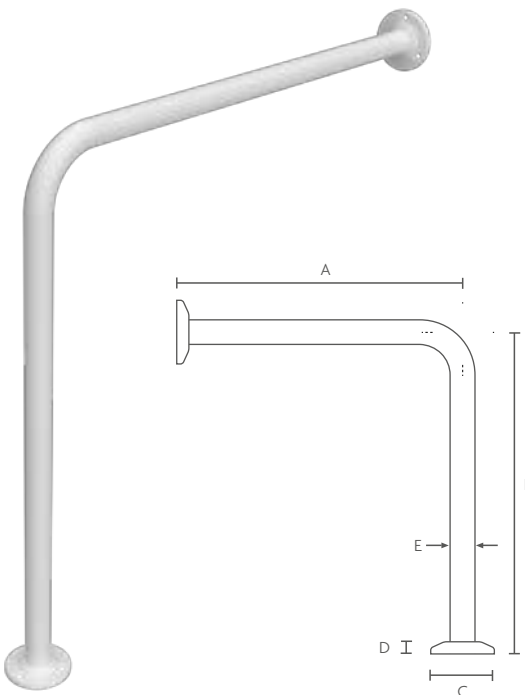

Floor to Ceiling Pole

Easy grip ribbed surface, manufactured from mild steel with a durable polyester finish.

Provides vertical support where wall fixing may not be suitable and trimmable to suit ceiling height.

		Dimensions			
Code		A	B	C	D
FCP1		2750mm	90mm	17mm	35mm



Fold Down Rails

Additional support where it matters

Our fold down rails provide reliable assistance alongside WCs and within showering areas. Designed to provide safe, dependable support in both domestic and commercial environments.

Available in a variety of sizes and configurations, including:

- Standard fold down rails
- Rails with supporting leg
- Rails with integrated toilet roll holder
- Double arm hinged support rails
- Floor mounted post options


Key features

- Tested load ratings up to 200kg (model dependent) *
- Robust powder-coated finish
- Stainless steel options available
- Doc M compliant models available
- Optional mixer shower conversion compatibility

*Load ratings vary per model.


Drop down rail with support leg

					Dimensions				
Code	Toilet roll holder	Shower area	Adjustable support leg height	Weight limit	A	B	C	D	E
DR5	Yes	No	635mm to 900mm	200kg	256mm	185mm	800mm	100mm	200mm
DR8	Yes	No	635mm to 900mm	200kg	256mm	185mm	800mm	100mm	200mm
DR11	No	Yes (Stainless steel)	610mm to 860mm	175kg	263mm	182mm	800mm	100mm	245mm
DR12	No	Yes (Stainless steel)	610mm to 860mm	175kg	263mm	182mm	650mm	100mm	245mm

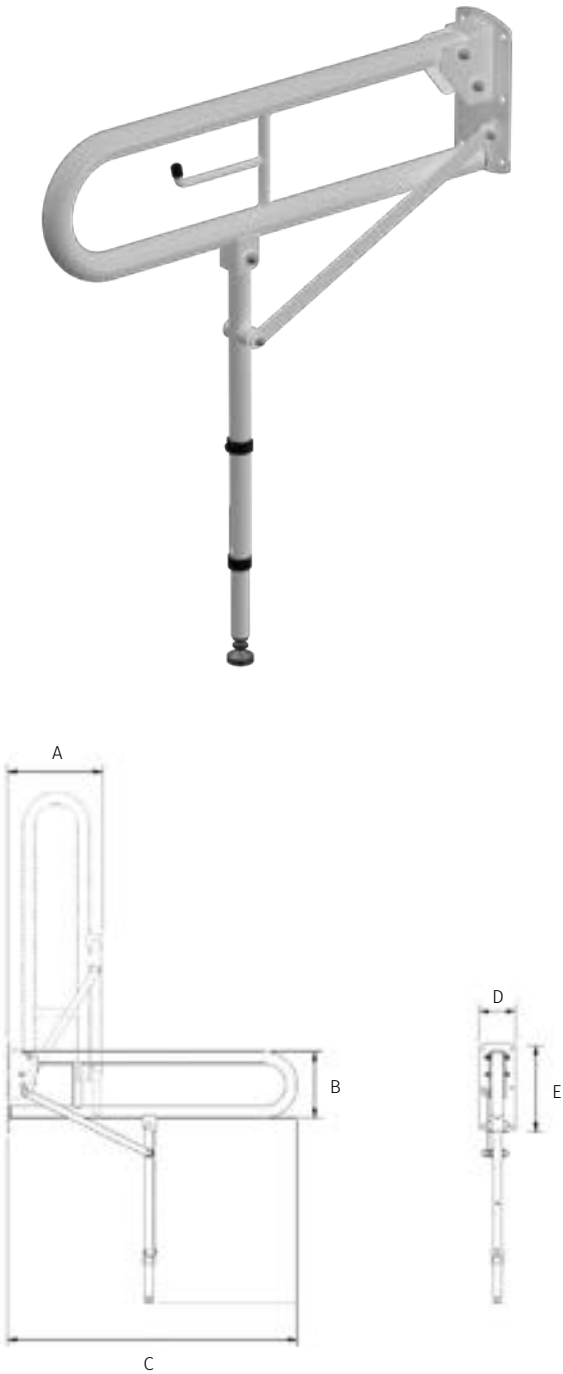

Drop down rail without support leg

				Dimensions				
Code	Toilet roll holder	Shower area	Weight limit	A	B	C	D	E
DR1	Yes	No	115kg	222mm	185mm	550mm	100mm	200mm
DR7	Yes	No	115kg	222mm	185mm	800mm	100mm	200mm

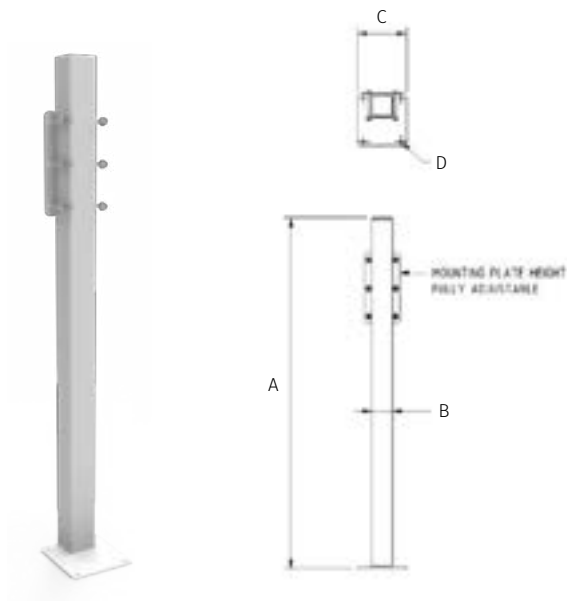

Floor mounted post

			Dimensions			
Code	Shower area	Weight limit	A	B	C	D
DR3	No	200kg	1000mm	60mm	140mm	150mm



For advice and support, please contact our Technical Team on 01460 256080 or visit [impeyshowers.com](https://www.impeyshowers.com)

Boston Comfort & Safety Range

Style and safety combined

The Boston Comfort & Safety range has been developed for customers who require additional support in the bathroom but do not want to compromise on style.

Manufactured in brushed or polished stainless steel, the collection combines elegant design with certified strength — delivering reassurance in both residential and healthcare environments.

The Boston range allows you to create a complete, cohesive bathroom scheme with matching safety accessories. By combining premium finishes with clinical-grade strength, it enables designers, installers and specifiers to deliver bathrooms that are safe, discreet and visually refined.


Key features

- Load bearing up to 150kg (model dependent) *
- Brushed or polished stainless steel finishes
- 25mm diameter rails for secure grip
- CE compliant
- TÜV tested
- Corrosion-resistant construction

*Shower seat rated up to 120kg (18 stone).

Straight Grab Bars


Available in brushed or polished finishes and 3 lengths to suit various wall positions.

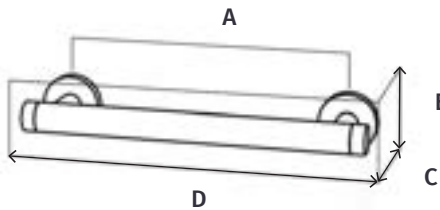

Grab Bar 300mm

Code	Finish	A	B	C	D
297720346	Polished	250mm	51mm	69mm	300mm


297720946	Brushed	250mm	51mm	69mm	300mm
-----------	---------	-------	------	------	-------

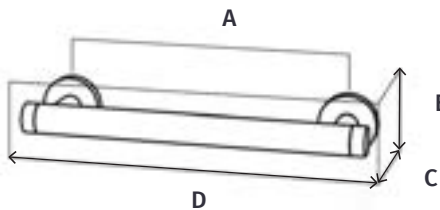

Grab Bar 450mm

Code	Finish	A	B	C	D
297920346	Polished	400mm	51mm	70mm	450mm

297920946	Brushed	400mm	51mm	70mm	450mm
-----------	---------	-------	------	------	-------

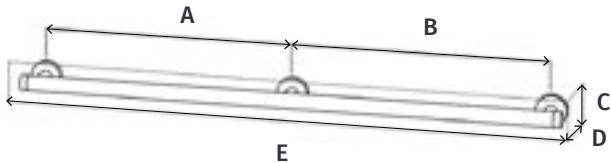


Grab Bar 900mm

Code	Finish	A	B	C	D	E
298120346	Polished	425mm	425mm	51mm	70mm	900mm

298120946	Brushed	425mm	425mm	51mm	70mm	900mm
-----------	---------	-------	-------	------	------	-------

Angled Grab Bars (135° and 90°)

Designed to support natural movement and assist sit-to-stand transitions.

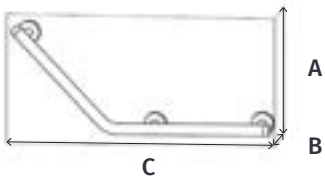


135° Angled Grab Bar

Code	Finish	A	B	C
298720346	Polished	236mm	70mm	587mm

298720946	Brushed	236mm	70mm	587mm
-----------	---------	-------	------	-------

298750346	Polished	236mm	70mm	587mm
-----------	----------	-------	------	-------

298750946	Brushed	236mm	70mm	587mm
-----------	---------	-------	------	-------

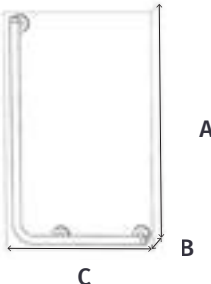

90° Angled Grab Bar


Code	Finish	A	B	C
298320346	Polished	700mm	70mm	426mm

298320946	Brushed	700mm	70mm	426mm
-----------	---------	-------	------	-------

Grabrails, Handrails & Accessories

Safety Grab Bar with Integrated Toilet Roll Holder


Combines essential support with subtle practicality.

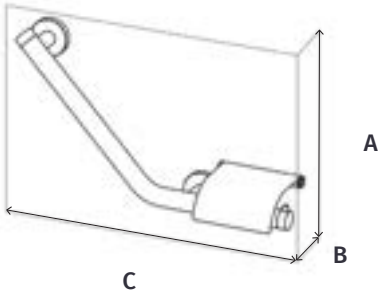

		Dimensions		
Code	Finish	A	B	c
299120346	Polished	241mm	80mm	404mm
299120946	Brushed	241mm	80mm	404mm
299150346	Polished	241mm	80mm	404mm
299150946	Brushed	241mm	80mm	404mm

Shower Seat


A stylish, wall-mounted option delivering comfort and confidence in the showering area. Shower seat load rating up to 120kg (18 stone).

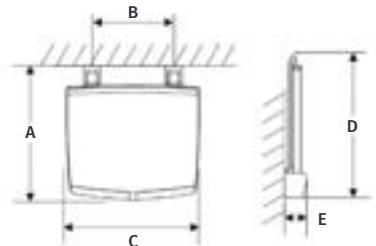

		Dimensions				
Code	Finish	A	B	C	D	E
299520346	Grey	325mm	200mm	325mm	343mm	53mm

Anti Slip Soft Grip

This anti-slip soft grip is exclusively intended for Boston safety grip handles. This anti-slip grip provides additional support to users with limited stability. Supplied with an adhesive spray to adhere the rubber grip to the grab rails.

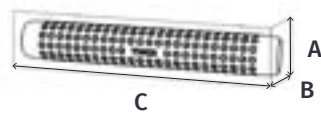

		Dimensions		
Code	Finish	A	B	c
297521046	Grey	32mm	32mm	210mm





Healthcare Toilet and Bathroom Accessories

Healthcare toilet and bathroom accessories help bring greater comfort, dignity and ease to everyday routines. Impey's healthcare toilet and bathroom accessories are designed to support safer, more practical daily routines with discreet functional support. Each solution is selected to meet the real needs of users, carers and specifiers alike.


Toilet Plinths	Page 206
Apres Body Dryer	Page 207
Access Panels	Page 207
Closomat Palma Vita Automatic Toilet	Page 208
Closomat Palma Vita Accessories	Page 209

Toilet Plinths

Flexible height adjustment without replacing the WC

Impey toilet plinths are designed to raise the height of an existing toilet, making transfers easier for wheelchair users and those with limited mobility.


Discreet, non-intrusive design, improves accessibility while maintaining a clean, modern bathroom. All products are white with back-to-wall plinth options available.

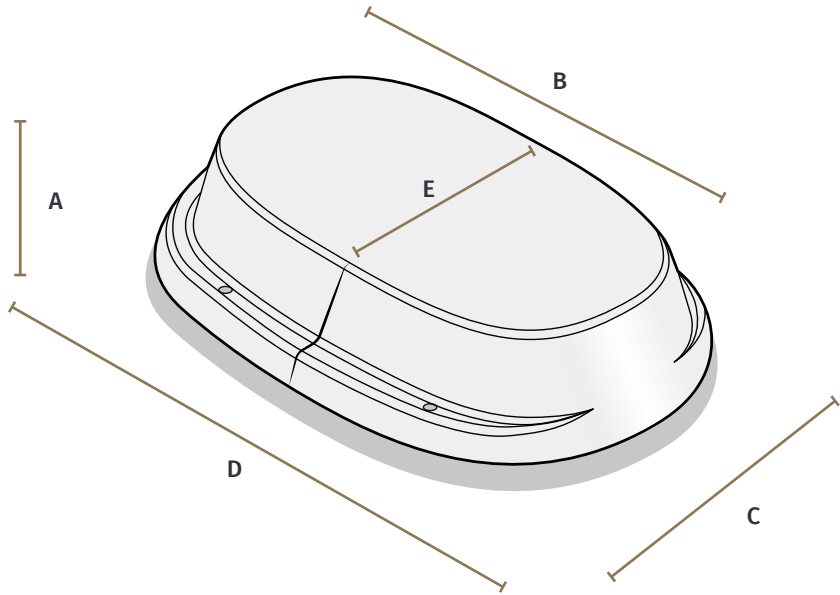

Standard Plinth		Dimensions				
Code	Product	A	B	C	D	E
PI25	Toilet Plinth 25mm	25mm	402mm	246mm	456mm	229mm
IP50	Toilet Plinth 50mm	50mm	402mm	286mm	456mm	229mm
IP75	Toilet Plinth 75mm	75mm	389mm	289mm	459mm	220mm
IP100	Toilet Plinth 100mm	100mm	383mm	295mm	465mm	213mm



For advice and support, please contact our Technical Team on 01460 256080 or visit [impeyshowers.com](https://www.impeyshowers.com)

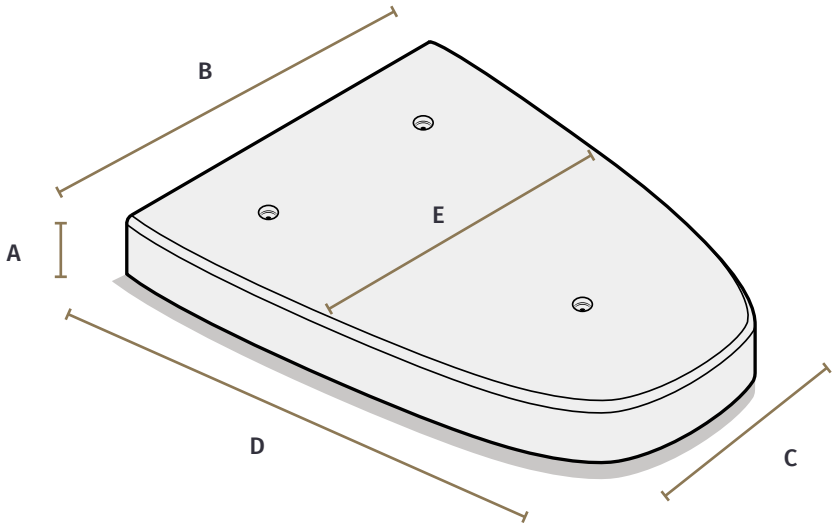

Back to Wall Plinth		Dimensions				
Code	Product	A	B	C	D	E
IPBW25	Toilet Back to the Wall Plinth 25mm	25mm	312mm	225mm	433mm	294mm
IPBW50	Toilet Back to the Wall Plinth 50mm	50mm	312mm	225mm	433mm	295mm
IPBW75	Toilet Back to the Wall Plinth 75mm	75mm	312mm	225mm	433mm	304mm
IPBW100	Toilet Back to the Wall Plinth 100mm	100mm	312mm	225mm	433mm	305mm

Apres Body Dryer

A practical alternative to towels

The Apres Body Dryer provides a complete all-over body drying solution, fitting neatly into most shower and bathing areas. Designed to reduce reliance on towels, it supports independent living while maintaining high safety standards.

Key features

- Two-speed body dryer
- 2075mm height
- 220/240V voltage
- Normal output, 2.9kW
- 20° average air outlet temperature
- On/off airflow switch
- ABS plastic construction
- Tested to EN60335-2-23
- Sound level 70dB
- 3 year warranty

Product	Code	Height	Air Temp
Apresb 2 Speed Body Dryer	BODYDRYER	2075mm	20° C



Impey Plastic Access Panels

Simple, discreet installation access

Impey Plastic Access Panels provide a neat and practical solution for accessing stopcocks, pipework and services, or for covering unsightly openings without the need for costly repairs.

Product	Code	Dimensions
Access Panel	AP1523	152mm x 228mm
Access Panel	AP2020	203mm x 203mm
Access Panel	AP3030	300mm x 300mm
Access Panel	AP3535	355mm x 355mm

Key features

- Easy to install
- 3mm thick high impact styrene plastic with UV stabilisers
- White textured surface, suitable for painting
- Available in four sizes



Closomat Palma Vita Automatic WC

Dignity without compromise, enhanced hygiene

The Closomat Palma Vita Automatic WC is the only toilet of its kind designed specifically for elderly and disabled people. Simple to operate, combining the functions of a flushing WC, a warm water bidet, and warm air drying in one intuitive solution.

Designed to properly support the user and position them correctly, improving personal hygiene while reducing the need for hand contact.


Palma Vita is engineered for reliability, ease of use and long-term performance in both domestic and care environments. Designed and manufactured in the UK.

Key features

- One-touch automatic flush, wash and dry cycle
- Can be used as a conventional WC
- Improved hygiene
- Designed for elderly and disabled users
- Adjustable wash duration to suit individual needs
- Safe working load 190kg (30 stone)
- Maximum user weight 362kg (57 stone) when fitted with Big John Seat
- Touch sensitive switch (wall- or floor-mounted; operated by hand or foot)

Simultaneous flushing and washing

Simple, intuitive operation with a single press and release of the flush activates the automatic wash and dry cycle, while still allowing the WC to be used conventionally at any time.

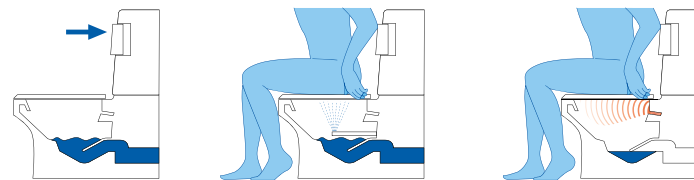

Product	Code Horizontal	Weight Limit	Wash and Dry	Douche Option
Palma Vita Toilet	CLOS-O-MAT	190kg	Yes	Single or double



Bathroom Accessories

Closomat Palma Vita optional accessories

A comprehensive range of accessories allows the Palma Vita to be tailored to user needs.



Big John Bariatric Seat



Soft Seat



Fold Down Arms



Shaped Plinth



Infrared Remote Control



Hand/Foot Switch




Infrared Switch



Infill Panel

Product	Code	Description
Big John Bariatric Seat	BIGJOHNSEAT	Larger comfortable seat, for up to 362kg
Soft Seat	SOFT SEAT	Supplied in dark blue to aid the visually impaired
Soft Arm Sleeves (Pair)	SOFTARMSLEEVES	Easy to fit, and comfortable
Fold Down Arms	FOLD DOWN ARMS	Robust and secure support arms
Shaped Plinth	SHAPED PLINTH	Available in 25mm, 50mm, 75mm, and 100mm
Hand/Foot Switch	HAND/FOOT SWITCH	Touch sensitive, includes wall bracket
Infrared Switch	PROXYSWITCH	Motion activated infrared switch
Infill Panel	INFILL PANEL	Available in 25mm, 50mm, and 75mm
Infrared Remote Control	INFRARED REMOTE	Simple 'push and go' style infrared control



For advice and support please contact the Impey technical team on 01460 256080 or visit www.impeyshowers.com

Impey Resources



Impey Resources

Access our complete resources library of brochures, datasheets, technical documents and support resources.



Fitting Instructions

Download installation guides and fitting instructions for Impey wetroom and accessible shower products.



Datasheets

View technical datasheets, certifications and product specification information.



Installation Videos

Watch step-by-step Wetroom & Accessible Shower installation videos for Impey wetroom and shower solutions.



Guarantee Registration

Register your Impey product guarantee quickly and easily online.



GEESA

Explore our complete Geesa bathroom accessories collection, including product information and inspiration.



Terms & Conditions

View the latest Impey terms and conditions, including sales, warranty and guarantee information.

Guarantees, Terms & Conditions

Impey products are backed by a range of product-specific guarantees. Full guarantee details, terms and conditions, exclusions and warranty periods can be found at www.impeyshowers.com.

For the latest product information, technical documentation and guarantee details, please visit our website.

Impey reserves the right to amend product specifications without prior notice as part of its continuous product development programme.

impey

Conquest Business Park
Cad Road
Ilton
Somerset
TA19 9EA

Part of Coram Group

salesorders@impeyshowers.com
technical.support@impeyshowers.com
01460 256080



Speak to our technical team and get support with specification, installation, CAD drawings and product selection.



www.impeyshowers.com



salesorders@impeyshowers.com



technical.support@impeyshowers.com



01460 256080



Printed on recyclable paper – please recycle after use.

Committed to reducing environmental impact and minimising the use of single-use plastics across our operations.

Whilst every effort has been made to ensure the information contained within this publication is accurate at the time of printing, Impey reserves the right to amend product specifications without prior notice.

Images are reproduced within the limitations of the printing process and are intended for illustrative purposes only.

Product appearance may vary. Errors and omissions excepted.

Full terms and conditions available at www.impeyshowers.com



Quality Management System certified
to ISO 9001 at our Ilton Head Office.



Environmental Management System
certified to ISO 14001 at our Bridgnorth
manufacturing and warehouse facility
and Ilton head office.

Impey
Conquest Business Park
Cad Road
Ilton
Somerset
TA19 9EA

Part of Coram Group