

EDITION
17

saaxbol lighting

WELCOME TO EDITION SEVENTEEN

Saxby Lighting has been designing and manufacturing lights for commercial and domestic use for over 30 years. Our team of lighting specialists combine a wealth of knowledge, with a passion for innovation to create solutions. We listen to customers' feedback and design our products to meet the needs of our users; that means safe, efficient installation and products you can trust. We are immensely proud of our industry relationships and pride ourselves on being a consistent and supportive partner to our wholesalers.



OUR PRODUCTS



SAFE, FAST FIX
INSTALLATION



THE RIGHT PRODUCT
FOR THE JOB



MORE FUNCTIONALITY
THE RIGHT PRICE



INDUSTRY LEADING
WARRANTIES

OUR SERVICE



SAXBY TRADE
EXCLUSIVE PORTAL



TECHNICAL SUPPORT
LIGHTING DESIGN



NEXT DAY DELIVERY
4PM CUT OFF



MARKETING
SUPPORT

CONTENTS

	SAXBY SMART	12		WALL	257
■	RECESSED	16		BOLLARD	275
	FIRE RATED	19		FLOODLIGHT	279
	DOWNLIGHT	38		BULKHEAD	290
	ACCESSORY	52		GUIDE	303
■	COMMERCIAL	56		DECKING	313
	DOWNLIGHT	59		GROUND	325
	PANEL	68		SPIKE	331
	SUSPENSION	77	■	EMERGENCY	334
	BATTEN	82		GUIDE	337
	HIGH BAY	99		WALL	341
	BULKHEAD	108		RECESSED	342
	FLUSH	118		EMERGENCY KIT	346
	TRACK	121	■	LAMP & ACC.	348
	SURFACE DOWNLIGHT	134		GU10	350
■	INTERIOR	136		MR16	357
	SPOTLIGHT	138		GU10 SMART	358
	WALL	145		G4	359
■	DISPLAY	158		G9	360
	CABINET	160		B22	362
	TAPE KITS	164		E27	363
	TAPE	168		E14	366
	EXTRUSION	198		DIMMER	368
■	BATHROOM	202		DRIVER	369
	SPOTLIGHT	205		TRANSFORMER	371
	COLLECTION	206		SENSOR	372
	FLUSH	207		CONNECTOR	381
	WALL	209	■	TECHNICAL	382
	MIRROR	219		GUIDE	384
■	EXTERIOR	232		T&CS	391
	COLLECTION	235		INDEX	392

EDITION 17

NEW PRODUCTS & RANGE EXTENSIONS


RANGE EXTENSION
SHIELDONE 75 TRIMLESS
P38



RANGE EXTENSION
STRATUS ULTRA **P73**



LINUS P77



AUSTEN P80



ALOKA CCT P82



ENDURA P92



TITAN ANTI-GLARE P103



**BULKHEAD CONVERSION
PLATE P117**



OLLO P118



**LUNARO/LUNARO 3-PHASE
P121**



LUMOS P146



CLARUS P156



EDITION 17 NEW PRODUCTS & RANGE EXTENSIONS

VISUS P157



ORION P172-181



ORI P210



STEN P211



FROST P212



ANIANI P223



SCOPE P235



**RANGE EXTENSION
GLOVER P264**



**RANGE EXTENSION
BRETON TWIN P267**



FORTIS P289



FORGE P297



**SIGHTPRO 2-IN-1
DOWNLIGHT P343**



PRODUCT DIRECTORY

RECESSED

SHIELDPRO
P19



SHIELDPRO SMART
P20



SHIELDSLIM
P21



NEW SHIELD360
P22



SHIELDECO CCT
P23



SHIELDPRO ANTI-GLARE
P24



SHIELDECO CCT
ANTI-GLARE P25



SHIELDECO CCT TILT
P27



ORBITALPRO 4CCT
P30



ORBITALPRO SMART
P31



SPECULO
P32



SPECULO ANTI-GLARE
P33



ShieldONE 75
P36



ShieldONE 65
P37



NEW ShieldONE
TRIMLESS P38



SHIELD LITE 4CCT
P39



SHIELDECO TRIMLESS
BEZEL P40



RAVEL
P41



TRIMLESS GU10
P43



TRIMLESS DOWNLIGHT
P44



LALO
P45



CAST
P46



CONVERSE
P48



XENO
P49



CIRCO
P51



LAMPHOLDERS
P52



NEW POWERLINK
P53



HEATGUARD
P55



PARAGON CCT
P59



AXIAL CCT
P61



AXIAL RECTANGLE
P62



SIRIO DISC
P63



SIRIO DISC
ADJUSTABLE P65



COMMERCIAL

STRATUS BASE
P68



STRATUS
P69



STRATUS PRO
P70



NEW STRATUS PRO
TPA P70



STRATUS PRO CCT
P72



NEW STRATUS ULTRA
P73



SIRIO FRAME
P75



NEW LINUS
P77



KINGSLEY
P78



BORDE CCT
P79



NEW AUSTEN
P80



NEW ALOKA
P82



ECOLINEAR
P83



RULARPLUS
P85



RULARPRO
P86-87



MICROWAVE & PIR
SENSORS P88



DUAL LED
P89



NEW ENDURA
P92



REEVE ECO
P95



REEVE 2
P97



ALTUM PRO
P99-100



NEW TITAN
ANTIGLARE P103



NEW APOLLO
P105



SAXBY HEROPRO CCT
P108



SAXBY
HEROPRO MINI P110



SAXBY HEROPRO
XL P111



SAXBY HEROULTRA
P113



FORCAULTRA CCT
P114-115



CORE CCT
P116



NEW BULKHEAD
PLATE P117



NEW OLLO
P118



PUCK CCT
P119



NEW LUNARO
P121-122



COLT LED
P124



COLTLED CCT
P125



PRODUCT DIRECTORY

COMMERCIAL

NEW JUNO LED
P127



MONTE
P128



AREZZO
P129



CONOR
P129



BULLETT
P130



TRACK
P131



TRACK ACCESSORIES
P132-133



DANGO
P134



JUNO SURFACE
P135



AMALFI
P138-142



AREZZO
P143



PALERMO
P144



SHALE
P145



NEW LUMOS
P146



NEW LUMOS MINI
P147



MADISON
P149



ZEKE
P151



TOKO
P152



MINI CRESCENT
P153



CRESCENT
P154



BOX
P155



NEW CLARUS
P156



NEW VISUS
P157



HERA CCT
P160



NYX CCT
P161



SLEEK CCT
P162



ORION KITS
P164



FLEXLINE RGB KIT
P165



FLEXLINE CCT KIT
P166



FLEXLINE KIT
P167



NEW ORION20 48V
IP20 P172



NEW ORIONPRO 48V
IP20 P174



NEW ORIONPRO 67/
ORION 67 48V
P176





INTERIOR

DISPLAY

PRODUCT DIRECTORY

DISPLAY



BATHROOM

PRODUCT DIRECTORY

BATHROOM

REVELO
P229



NEW REVAN
P230



EXTERIOR

NEW SCOPE
P235



PALIN
P237-243



ATLANTIS
P244-245



ODYSSEY
P247



ICARUS
P248



EQUINOX
P251



TANGO
P252



BLISS
P253



ROKO
P254



PYRAMID
P255



TRIBECA
P256



HAYDEN
P257



SENTINEL CCT
P258



BIANCO
P259



MORTI
P261



NOCULA CCT
P262



VULCAN CCT
P263



NEW GLOVER CCT
P264



WARE
P266



NEW BRETON
P267



YORK
P268



INOVA PIR
P269



PAGODA PIR
P270



TRADITIONAL
P271



HALBURY
P272



EVESHAM
P273



BAYSWATER
P274



LOUVRE
P275



DAX CCT
P276



ZONE
P277



PRODUCT DIRECTORY

EXTERIOR

**SALDE
P279-281**



**SALDE TWIN
P282**



**GUARD
P286**



**GUARD PIR OVERRIDE
P287**



**NEW FORTIS
P289**



**MOTION LED PIR
P290**



**LUIK
P293**



**LUCCA CCT
P294**



**LUCCA MINI
P295**



**NEW FORGE
P297**



**SERAN
P298**



**AVIT CCT
P299**



**NEW PILLO PLUS CCT
P300**



**NEW ROND PLUS CCT
P301**



**SEINA STAINLESS STEEL
P303**



**SEINA BLACK
P304**



**SEINA RGB SMART
P305**



**SEVERUS CCT
P306**



**ALBUS CCT
P309**



**ECO
P310**



**IKONPRO CCT
P313**



**IKONPRO ACCESSORIES
P314**



**IKONPRO CCT BLACK
P315**



**IKONPRO RGB
P316**



**IKONPRO RGB SMART
P317**



**IKON ROUND
P318**



**KIOS 2 CCT
P319**



**COVE
P320**



**HAYZ
P321**



**HADES
P323**



**MARKA CCT
P325**



**PILLAR
P326-327**



**PILLAR TILT
P328**



**HOXTON
P329**



**LUMINATRA
P331**



PRODUCT DIRECTORY

EXTERIOR

TRITON
P332



OPAZ MV
P333



EMERGENCY

SIGHTPRO
P337



SIGHTPRO MINI
P338



SIGHTPRO BOX
P339



SIGHTPRO 6-IN-1
P340



SIGHTPRO TWIN SPOT
P341



SIGHTPRO RECESSED
DOWNLIGHT P342



NEW SIGHTPRO
2-IN-1 P343



SIGHT RECESSED
P344



EM CONVERSION KIT
P346



EM CONVERSION KIT
P347



LAMPS & ACCESSORIES

GU10
P350-355



GLASS GU10
P356



MR16
P357



GU10 SMART
P358



G4
P359



G9
P360-361



NEW B22
P362



NEW E27
P363



E27 FILAMENT
P364



E27 LED STICK CCT
P365



NEW E14
P366



NEW WHITE FILAMENT
P367



NEW ULTRA EFFICIENT
P367



DIMMER MODULE
P368



DRIVERS
P369-370



TRANSFORMER
P371



MICROWAVE
DETECTOR P372



NEW PIR DETECTOR
2-IN-1 P373



PRESENCE DETECTOR
2-IN-1 P373



PIR IP65
P374



PRODUCT DIRECTORY

PIR DETECTOR 3-IN-1
P375



PIR MINI
P376



PIR MINI
P377



SECURITY DETECTOR
P378



PHOTOCELL
P379



TWILIGHT DETECTOR
P380



INLINE DETECTOR
P381



TIME TO SAY 'HELLO' TO YOUR LIGHTING...



Our smart lighting range has built-in software that you can control remotely for an easier, efficient and personalised way of using your lights. No need for a hub or complex installations. Simply download the Tuya app to configure the lights your way, directly from your smartphone or using your own voice on smart home voice recognition products, such as Amazon Echo or Google Home.

HOW IT WORKS:

DOWNLOAD THE 'TUYA' APP

Please scan the QR code or search 'Tuya' to download from your App Store or Google Play.



REGISTRATION & LOG IN

- Enter your email or mobile phone number to register
- A verification code will be sent via email or text message
- Set your password

SET UP


Connect your lights to the app and start controlling.

Saxby Smart products are only supported on 2.4G WIFI bands.

INTELLIGENT LIGHTING®
saxbysmart


NO HUB REQUIRED OR COMPLEX INSTALLATIONS

Saxby Smart fittings come fully equipped with a built in chip that connects to your Wi-Fi router. Simply download the Saxby Smart app to your smartphone, register and add your lighting devices. You're good to go - create a personalised lighting experience.



CREATE SCENES TO SUIT YOUR WAY OF LIVING & WORKING

Educate or program your voice control device to suit you. Control multiple devices in a single room or building by creating scenes within the Saxby Smart app or through Amazon Alexa or Google Assistant.

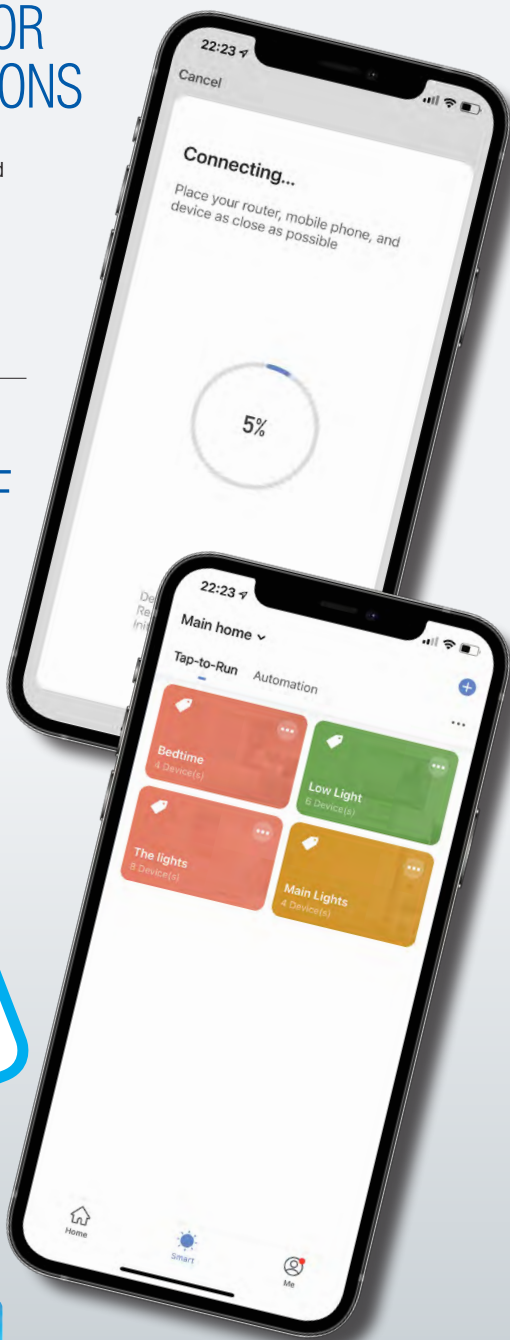

TAKE FULL CONTROL OF YOUR LIGHTING

Saxby Smart devices are compatible with Amazon Alexa and Google Assistant, allowing control of your lights with your own voice. Once set up has been completed using the Tuya app, simply download 'Smart Life' to your voice control app to discover your devices and start voicing commands!



TIME SCHEDULE HOME OR AWAY

Using the Tuya app or your voice control app, schedule activity for your lighting when you're out and about giving you peace of mind.

YOUR DATA IS SAFE & SECURE

Military grade security for guaranteed peace of mind as your data is being handled safely.

INTELLIGENT LIGHTING®
saxbysmart



OUR SMART RANGE

View our range of smart recessed, interior, exterior and lamp fittings.

SHIELDPRO SMART
P20



ORBITAL SMART
P31



SEINA RGB SMART
P305



IKON RGB SMART
P317



GU10 RGB SMART
P358





RECESSED

Recessed downlights are a subtle and interesting way to add a modern feel to your home. Saxby Lighting's recessed range covers all your domestic and commercial needs.

FIRE RATED	19
DOWNLIGHT	38
ACCESSORIES	52



2.7K/3K/4K/6K
CCT SWITCH



5W/7W
WATT SWITCH



FAST-FIX
CONNECTOR



SHALLOW
50MM PROFILE

SHIELDPRO

Dual wattage, high performance CCT downlight

The popular ShieldPRO fitting from Saxby has been upgraded! This fitting comes with a 3-way 'Plug and Play' connector which allows users to loop in and out. The 4-way CCT switch and dual wattage switch has been moved under the bezel making for easy access giving the user ability to easily choose between 2700K, 3000K, 4000K or 6000K and 5W or 7W. Other features include: the option to be covered with insulation, fits into shallow ceiling voids, IP65-rated, and fully fire-rated for 30, 60 and 90-minute ceilings.

SHIELDPRO

Dual wattage, high performance downlight



5YR
WARRANTY



CLASS 2



DIMMABLE



FIRE RATED
30, 60, 90 MINS



STEEL WEB JOIST
30 MINS



I-JOIST
30 MINS



IP65
RATED



60°
BEAM

UP TO
750
LUMENS

Spring ceiling clips

Hold the ShieldPRO firmly in place

Twist & lock bezel

Simple twist & lock fitting system

Wattage selectable

Choose between 5W or 7W at the flick of a switch located under the bezel

Can be covered in insulation

Super low 50mm profile

Suitable for shallow ceiling voids

Colour changing technology

Choose between 2700K, 3000K, 4000K, 6000K at the flick of a switch located under the bezel

- Emergency pack available: Use 103944 - Details on page: 347

LEVER TERMINAL

Fast and secure installation.
Loop in, loop out
terminals

DETACHABLE CONNECTOR

Allows for first fix wiring
and easy removal for
decorating

INTERCHANGEABLE BEZELS

Matt white bezel included.
Satin nickel, chrome, black, antique brass,
polished brass and anthracite grey

Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
112551	ShieldPRO	Matt white	2700/3000/4000/6000	750	107	Proj: 4mm H: 50mm Dia: 89mm	68mm
113640	ShieldPRO 10 pack	Matt white	2700/3000/4000/6000	750	107	Proj: 4mm H: 50mm Dia: 89mm	68mm
114590	ShieldPRO Bezel	Satin nickel	-	-	-	Proj: 4mm Dia: 89mm	-
114591	ShieldPRO Bezel	Chrome	-	-	-	Proj: 4mm Dia: 89mm	-
114592	ShieldPRO Bezel	Black	-	-	-	Proj: 4mm Dia: 89mm	-
114593	ShieldPRO Bezel	Antique brass	-	-	-	Proj: 4mm Dia: 89mm	-
114594	ShieldPRO Bezel	Polished brass	-	-	-	Proj: 4mm Dia: 89mm	-
114595	ShieldPRO Bezel	Anthracite grey	-	-	-	Proj: 4mm Dia: 89mm	-

Order online www.saxbytrade.com

SHIELDPRO SMART

High performance smart downlight




600
LUMENS

FAST
FIX



- Constructed from die cast aluminium alloy & acrylic
- 8W LED module (SMD)
- Can be covered in insulation

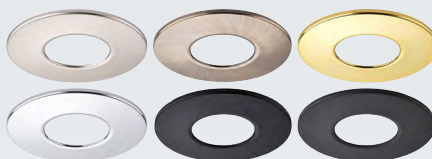

INTELLIGENT LIGHTING®
saxbysmart

“Alexa, turn on the lights”

SaxbySmart products are compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice



Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
81555	ShieldPRO Smart	Matt white	4000K & RGB	600	75	H: 48mm Dia: 89mm	70mm
114590	ShieldPRO Bezel	Satin nickel	-	-	-	Proj: 4mm Dia: 89mm	-
114591	ShieldPRO Bezel	Chrome	-	-	-	Proj: 4mm Dia: 89mm	-
114592	ShieldPRO Bezel	Black	-	-	-	Proj: 4mm Dia: 89mm	-
114593	ShieldPRO Bezel	Antique brass	-	-	-	Proj: 4mm Dia: 89mm	-
114594	ShieldPRO Bezel	Polished brass	-	-	-	Proj: 4mm Dia: 89mm	-
114595	ShieldPRO Bezel	Anthracite grey	-	-	-	Proj: 4mm Dia: 89mm	-

RECESSED FIRE RATED

SHIELDSLIM

Slimline colour selectable downlight




600
LUMENS

CASAMBI
COMPATIBLE

DALI
COMPATIBLE



- Constructed from die cast aluminium alloy & acrylic
- 7W LED module (SMD) CCT
- 1.5KV surge protection
- Emergency pack available: Use 103944 - Details on page: 347



Can be covered with insulation

PUSH FIT TERMINAL

Fast and secure installation.
Loop in, loop out
terminals



DETACHABLE CONNECTOR

Allows for first fix wiring
and easy removal for
decorating



INTERCHANGEABLE BEZELS

Matt white bezel included.
Satin nickel, chrome, black, antique brass,
polished brass and anthracite grey



Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
103174	ShieldSLIM 4CCT 7W	Matt white	2700/3000/4000/6000	600	86	H: 32mm Dia: 89mm	68mm
114590	ShieldPRO Bezel	Satin nickel	-	-	-	Proj: 4mm Dia: 89mm	-
114591	ShieldPRO Bezel	Chrome	-	-	-	Proj: 4mm Dia: 89mm	-
114592	ShieldPRO Bezel	Black	-	-	-	Proj: 4mm Dia: 89mm	-
114593	ShieldPRO Bezel	Antique brass	-	-	-	Proj: 4mm Dia: 89mm	-
114594	ShieldPRO Bezel	Polished brass	-	-	-	Proj: 4mm Dia: 89mm	-
114595	ShieldPRO Bezel	Anthracite grey	-	-	-	Proj: 4mm Dia: 89mm	-

Order online www.saxbytrade.com

SHIELD 360 TRI WATTAGE 4CCT

Fully adjustable downlight with unique design

NEW
OPTIONS

- 5YR WARRANTY**
- CLASS 2**
- DIMMABLE**
- FIRE RATED**
30,60,90 MINS
- STEEL WEB JOIST**
30 MINS
- I-JOIST**
30 MINS
- IP44 RATED**
- 60° BEAM**

UP TO
800
LUMENS



- Constructed from die cast aluminium alloy & steel & acrylic
- Emergency pack available: Use 103944 - Details on page: 347

Can be covered with insulation



LEVER TERMINAL

Fast and secure installation.
Loop in, loop out
terminals



DETACHABLE CONNECTOR

Allows for first fix wiring
and easy removal for
decorating



CCT/WATTAGE MULTI SWITCH

Choose between 4W, 6W & 8W
and 2.7K, 3K, 4K & 6K

Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out	Min Void
119101	NEW Shield360	Satin nickel	2700/3000/4000/6000	800	100	Proj: 3mm Dia: 110mm H: 45mm	90mm	45mm
119102	NEW Shield360	Chrome	2700/3000/4000/6000	800	100	Proj: 3mm Dia: 110mm H: 45mm	90mm	45mm
103029	Shield360	Matt white	2700/3000/4000/6000	800	100	Proj: 3mm Dia: 110mm H: 45mm	90mm	45mm
106537	Shield360	Black	2700/3000/4000/6000	800	100	Proj: 3mm Dia: 110mm H: 45mm	90mm	45mm

RECESSED FIRE RATED

SHIELDECO CCT

Everyday fire rated downlight



550
LUMENS

FAST
FIX



INTERCHANGEABLE BEZELS

Satin nickel, chrome, black, antique brass, polished brass and anthracite grey



- Constructed from steel & acrylic
- Can be covered in insulation
- 5W LED module (SMD)
- Min. void 49mm
- Emergency pack available: Use 103944 - Details on page: 347

Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
109804	ShieldECO CCT	Matt white	3000/4000/6000	550	110	H: 49mm Dia: 82mm	57mm
113639	ShieldECO CCT 10 pack	Matt white	3000/4000/6000	550	110	H: 49mm Dia: 82mm	57mm
114584	ShieldECO Bezel	Satin nickel	-	-	-	Proj: 6mm Dia: 85mm	-
114585	ShieldECO Bezel	Chrome	-	-	-	Proj: 6mm Dia: 85mm	-
114586	ShieldECO Bezel	Black	-	-	-	Proj: 6mm Dia: 85mm	-
114587	ShieldECO Bezel	Antique brass	-	-	-	Proj: 6mm Dia: 85mm	-
114588	ShieldECO Bezel	Polished brass	-	-	-	Proj: 6mm Dia: 85mm	-
114589	ShieldECO Bezel	Anthracite grey	-	-	-	Proj: 6mm Dia: 85mm	-

Order online www.saxbytrade.com

SHIELDPRO ANTI-GLARE

Dual wattage, high performance downlight



SYR
WARRANTY



CLASS 2



DIMMABLE



FIRE RATED
30,60,90 MINS



STEEL WEB JOIST
30 MINS



I-JOIST
30 MINS



IP65
RATED



60°
BEAM

UP TO
650
LUMENS

Spring ceiling clips
Hold the ShieldPRO firmly in place

Twist & lock bezel
Simple twist & lock fitting system

Wattage selectable
Choose between 5W or 7W at the flick of a switch located under the bezel

Cover in insulation

Low 70mm profile
Suitable for shallow ceiling voids

Colour changing technology
Choose between 2700K, 3000K, 4000K, 6000K at the flick of a switch located under the bezel





- Constructed from steel & polycarbonate & acrylic

LEVER
TERMINAL

Fast and secure installation.
Loop in, loop out terminals



DETACHABLE
CONNECTOR

Allows for first fix wiring
and easy removal for
decorating



INTERCHANGEABLE
INSERTS

Matt white bezel included.
Black, chrome, black nickel and gold



Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
112541	ShieldPRO Anti-Glare 4CCT	Matt white	2700/3000/4000/6000	650	93	H: 70mm Dia: 94mm	75mm
112542	ShieldPRO Anti-Glare 4CCT	Matt black	2700/3000/4000/6000	520	74	H: 70mm Dia: 94mm	75mm
114580	ShieldPRO Anti-Glare Insert	Black	-	-	-	H: 21mm Dia: 60mm	-
114581	ShieldPRO Anti-Glare Insert	Chrome	-	-	-	H: 21mm Dia: 60mm	-
114582	ShieldPRO Anti-Glare Insert	Black nickel	-	-	-	H: 21mm Dia: 60mm	-
114583	ShieldPRO Anti-Glare Insert	Gold	-	-	-	H: 21mm Dia: 60mm	-

RECESSED FIRE RATED

SHIELDECO CCT ANTI-GLARE

Budget-friendly fire rated downlight



3YR
WARRANTY



CLASS 2



DIMMABLE



FIRE RATED
30,60,90 MINS



IP65
RATED



60°
BEAM



COVER IN
INSULATION

520
LUMENS

FAST
FIX



- Constructed from steel & acrylic
- 5W LED module (SMD)
- Min. void 80mm
- Cut out Dia: 80mm
- Emergency pack available: Use 103944 - Details on page: 347



CCT switch

Code	Description	Finish	K	LM	LM/W	Dimensions
101342	ShieldECO CCT Anti-Glare	Matt white	3000/4000/6000	520	104	Proj: 3mm Dia: 90mm H: 78mm

Order online www.saxbytrade.com



3K/4K/6K
CCT SWITCH



PUSH-FIT
TERMINALS



COVER IN
INSULATION



3YR
WARRANTY

SHIELDECO

Tiltable everyday fire rated downlight

Ideal for domestic use, the ShieldECO 500 CCT Tilt range has all the features required of an everyday downlight: fire rated, and dimmable. Toolless and quick to install due to the 4 way push fit screwless terminal block. The 5W LED SMD module produces 500 lumens.

SHIELDECO 500 CCT TILT

Tiltable everyday fire rated downlight


3YR
WARRANTY


CLASS 2


DIMMABLE


FIRE RATED
30,60,90 MINS


60°
BEAM

500
LUMENS

FAST
FIX



- 5W LED module (SMD) CCT
- Min void: 60mm
- Proj: 3mm H: 60mm Dia: 85mm
- Emergency pack available: Use 103944 - Details on page: 347



CCT switch

Code	Description	Finish	K	LM	LM/W	Cut out
108294	ShieldECO 500 CCT Tilt	Matt white	3000/4000/6000	500	100	70mm
108295	ShieldECO 500 CCT Tilt	Matt black	3000/4000/6000	500	100	70mm
108296	ShieldECO 500 CCT Tilt	Satin nickel	3000/4000/6000	500	100	70mm
108297	ShieldECO 500 CCT Tilt	Chrome	3000/4000/6000	500	100	70mm

Order online www.saxbytrade.com



**INVISIBLE
LIGHT SOURCE**



**ULTRA SLIM
44MM PROFILE**



**PUSH-FIT
TERMINALS**



**COVER IN
INSULATION**

ORBITALPRO

Ultra modern 'invisible' light source downlight

The Orbital produces a unique, glare-free light effect through indirect illumination that is refracted within its anti-glare dome. This slim line patented design is fire rated, IP65 rated and supplied with a high quality dimmable driver that works with leading and trailing edge dimmers. Fitted with push fit toolless terminal block for ease of installation.

ULTRA SLIM HIGH PERFORMANCE

Fire-rated Downlight.

Slim Die cast aluminium dome
Ideal for shallow ceiling voids

Spring ceiling clips
Hold the OrbitalPRO firmly in place

No visible light source
From unique anti-glare dome

LED Circle
Project light into the dome, bouncing indirect light into the room

Choice of bezel finish
Chrome, satin nickel, matt white & black



PUSH-FIT CONNECTOR

Fast and secure installation.
Loop in, loop out
terminals



LENS FREE

No visible light
source from unique
anti-glare dome



COVER IN INSULATION

Directly cover over with
insulation whilst fitting in
shallow ceilings voids



ORBITALPRO

Unique ultra-slim high performance indirect downlight

5YR
WARRANTY

CLASS 2

DIMMABLE

STEEL WEB JOIST
30 MINS

I-JOIST
30 MINS

IP65
RATED

120°
BEAM

UP TO
1100
LUMENS

FAST
FIX



CASAMBI
COMPATIBLE

DALI
COMPATIBLE



102670



----- 110mm -----



----- 135mm -----



----- 165mm -----

- Constructed from steel & acrylic
- Emergency pack available: Use 108097 - Details on page: 346



CCT switch



Can be covered with insulation

Code	Description		Finish	K	LM	LM/W	Dimensions	Cut Out
102670	OrbitalPRO 9W	 FIRE RATED 30,60,90 MINS	Matt black	2700/3000/4000/6000	460	51	Proj: 4.3mm Dia: 110mm	97mm
102669	OrbitalPRO 9W	 FIRE RATED 30,60,90 MINS	Matt white	2700/3000/4000/6000	590	66	Proj: 4.3mm Dia: 110mm	97mm
112543	OrbitalPRO 9W	 FIRE RATED 30,60,90 MINS	Satin nickel	2700/3000/4000/6000	520	58	Proj: 4.3mm Dia: 110mm	97mm
112544	OrbitalPRO 9W	 FIRE RATED 30,60,90 MINS	Chrome	2700/3000/4000/6000	520	58	Proj: 4.3mm Dia: 110mm	97mm
102671	OrbitalPRO 12W	 FIRE RATED 30,60 MINS	Matt white	2700/3000/4000/6000	800	67	Proj: 4.3mm Dia: 135mm	125mm
102672	OrbitalPRO 15W	 FIRE RATED 30,60 MINS	Matt white	2700/3000/4000/6000	1100	73	Proj: 4.3mm Dia: 165mm	155mm

RECESSED FIRE RATED



ORBITAL SMART

Smart unique ultra-slim high performance indirect downlight




450
LUMENS



- For more information on SaxbySmart see page 12

saxbysmart®
INTELLIGENT LIGHTING



Can be covered with insulation

“Alexa, turn on the lights”

SaxbySmart products are compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice



Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
79305	Orbital Smart 9W	Matt white	3000 - 6000	450	50	Proj: 3mm H: 44mm Dia: 110mm	97mm

Order online www.saxbytrade.com

SPECULO

Compact & slim low profile downlight


2YR
WARRANTY


CLASS 2


DIMMABLE


FIRE RATED
30,60,90 MINS


STEEL WEB JOIST
30 MINS


I-JOIST
30 MINS


IP65
RATED

**ULTRA
SLIM
BEZEL**

**FAST
FIX**



Bracket (120807)



- Constructed from steel & glass



Code	Description	Finish	Lamp	Dimensions	Cut Out	Min Void
99760	Speculo Round	Matt black	GU10 (required)	Proj: 1mm H: 36mm Dia: 85mm	67mm	122mm
79978	Speculo Round	Matt white	GU10 (required)	Proj: 1mm H: 36mm Dia: 85mm	67mm	122mm
79979	Speculo Round	Brushed chrome	GU10 (required)	Proj: 1mm H: 36mm Dia: 85mm	67mm	122mm
79980	Speculo Round	Chrome	GU10 (required)	Proj: 1mm H: 36mm Dia: 85mm	67mm	122mm
120807	NEW Downlight Bracket	Black	-	H: 97mm W: 65mm	-	-

RECESSED FIRE RATED

SPECULO ANTI-GLARE

Compact & slim low profile downlight


2YR
WARRANTY


CLASS 2


DIMMABLE


FIRE RATED
30,60,90 MINS


STEEL WEB JOIST
30 MINS


I-JOIST
30 MINS


IP65
RATED

ANTI
GLARE

FAST
FIX



- Constructed from steel & glass
- Proj: 1mm H: 60mm Dia: 85mm

1mm



Code	Description	Finish	Lamp	Cut Out	Min Void
80247	Speculo Anti-Glare	Matt white	GU10 (required)	75mm	157mm
80248	Speculo Anti-Glare	Matt black	GU10 (required)	75mm	157mm

Order online www.saxbytrade.com



THE ULTIMATE FIRE-RATED DOWNLIGHT SOLUTION



Saxby ShieldONE

The latest addition to Saxby's popular Shield Range with the choice of open & closed can options. Choose from Fixed, Tilt & IP65 twist lock bezels available in ten colour finishes.



**PUSH FIT
CONNECTOR**



**TWIST LOCK
BEZELS**



**COVER IN
INSULATION**



**ULTRA SLIM
PROFILE**



**2YR
WARRANTY**

ENCLOSED CAN

The Saxby ShieldONE enclosed can is available in both 65 & 75 cutoff options.



OPEN CAN

The Saxby ShieldONE open can is available in both 65 & 75 cutoff options.



INTERCHANGEABLE BEZELS

Saxby ShieldONE bezels: sleek, durable, and stylish. Crafted from die-cast aluminium alloy and steel with an ultra-slim profile of just 3mm, ensuring it withstands the test of time whilst providing functionality and style. Available in Fixed, IP65 & Tilt variants with a range of colour finish options; White, Black, Satin Nickel, Chrome, Black Nickel, Silver, Brass, Satin Brass, Antique Brass, Copper. Tilt variants are only available in ShieldONE 75 ranges.



ANTI-GLARE ACCESSORIES

Saxby ShieldONE Anti-Glare insert accessories are only compatible with Saxby ShieldONE 65 & 75 fire-rated open cans. First, choose your desired bezel option and colour finish from our extensive range offering, then simply clip your Anti-Glare accessory straight in the back of the bezel. Colour finish options include; White, Black, Chrome, Black Nickel, Gold.



FIRE RATING CERTIFICATION

Saxby ShieldONE has been tested for use in solid timber and is certified to 30,60,90 minutes. I-Joist and Steel Open Web Joist ceiling construction types are also certified to 30 minutes. All testing adheres to Part B, C and E of the building regulations (Please note: It is the responsibility of the installer to ensure compliance with all relevant regulations).



Saxby ShieldONE 75

The ultimate fire-rated downlight solution



2YR
WARRANTY



CLASS 1



FIRE RATED
30,60,90 MINS



STEEL WEB JOIST
30 MINS



I-JOIST
30 MINS



IP65
RATED



**FAST
FIX**



109806



109808



Fixed



IP65



Tilt

- GU10 (required)

Code	Description	Finish	Dimensions	Cut Out
109806	ShieldONE 75 Fire rated can	Matt black	Proj: 3mm H: 88mm Dia: 88mm	75mm
109808	ShieldONE 75 Fire rated open can	Matt black	Proj: 3mm H: 52mm Dia: 88mm	75mm
113320	ShieldONE 75 Fire rated can 10 pack	Matt black	Proj: 3mm H: 88mm Dia: 88mm	75mm
113322	ShieldONE 75 Fire rated open can 10 pack	Matt black	Proj: 3mm H: 52mm Dia: 88mm	75mm

ShieldONE 75 BEZEL & ACCESSORY OPTIONS

- Proj: 3mm H: 20mm Dia: 92mm
- ShieldONE Accessory Anti-Glare insert only suitable for open can versions

Description	M. White	M. Black	S. Nickel	Chrome	B. Nickel	Silver	Brass	S. Brass	A. Brass	Copper
ShieldONE 75 Bezel Fixed	113290	113291	113292	113293	113294	113295	113296	113297	113298	113299
ShieldONE 75 Bezel IP65	113300	113301	113302	113303	113304	113305	113306	113307	113308	113309
ShieldONE 75 Bezel Tilt	111577	111578	111579	111580	113313	113314	113315	113316	113317	113318

Description	White	Black	Chrome	B. Nickel	Gold
ShieldONE Accessory Anti-Glare Insert	111581	111582	113272	113273	113274
ShieldONE Accessory Honeycomb Lens	-	112626	-	-	-
NEW Downlight Bracket	-	120807	-	-	-

RECESSED FIRE RATED

Saxby ShieldONE 65

The ultimate fire-rated downlight solution

2YR
WARRANTY

CLASS 1

FIRE RATED
30, 60, 90 MINS

STEEL WEB JOIST
30 MINS

I-JOIST
30 MINS

IP65
RATED



FAST
FIX



109805

109807



Fixed



IP65

- GU10 (required)

Code	Description	Finish	Dimensions	Cut Out
109805	ShieldONE 65 Fire rated can	Matt black	Proj: 3mm H: 88mm Dia: 82mm	65mm
109807	ShieldONE 65 Fire rated open can	Matt black	Proj: 3mm H: 52mm Dia: 82mm	65mm
113319	ShieldONE 65 Fire rated can 10 pack	Matt black	Proj: 3mm H: 88mm Dia: 82mm	65mm
113321	ShieldONE 65 Fire rated open can 10 pack	Matt black	Proj: 3mm H: 52mm Dia: 82mm	65mm

ShieldONE 65 BEZEL & ACCESSORY OPTIONS

- Proj: 3mm H: 20mm Dia: 85mm
- ShieldONE Accessory Anti-Glare insert only suitable for open can versions

Description	M. White	M. Black	S. Nickel	Chrome	B. Nickel	Silver	Brass	S. Brass	A. Brass	Copper
ShieldONE 65 Bezel Fixed	111569	111570	111571	111572	113276	113277	113278	113279	113280	113281
ShieldONE 65 Bezel IP65	111573	111574	111575	111576	113284	113285	113286	113287	113288	113289

Description	White	Black	Chrome	B. Nickel	Gold
ShieldONE Accessory Anti-Glare Insert	111581	111582	113272	113273	113274
ShieldONE Accessory Honeycomb Lens	-	112626	-	-	-
NEW Downlight Bracket	-	120807	-	-	-

Order online www.saxbytrade.com

Saxby ShieldONE 75 TRIMLESS

The ultimate trimless downlight solution

NEW
PRODUCT


2YR
WARRANTY


CLASS 1


IP65
RATED



LINKABLE

FAST
FIX



Fixed bezel



IP65 bezel



Tilt bezel



Dovetail together

Code	Description	Finish	Dimensions	Cut Out
119105	NEW ShieldONE 75 Trimless	White	H: 103mm W: 145mm D: 145mm	103mm

ShieldONE 75 BEZEL OPTIONS

- Proj: 3mm H: 20mm Dia: 92mm

Description	M. White	M. Black	S. Nickel	Chrome	B. Nickel	Silver	Brass	S. Brass	A. Brass	Copper
ShieldONE 75 Bezel Fixed	113290	113291	113292	113293	113294	113295	113296	113297	113298	113299
ShieldONE 75 Bezel IP65	113300	113301	113302	113303	113304	113305	113306	113307	113308	113309
ShieldONE 75 Bezel Tilt	111577	111578	111579	111580	113313	113314	113315	113316	113317	113318

RECESSED TRIMLESS

SHIELDLITE

Budget friendly downlight suitable for soffits


3YR
WARRANTY


CLASS 2


DIMMABLE


IP65
RATED

520
LUMENS

0.3M
PRE WIRED
CABLE



- Constructed from polycarbonate & acrylic
- 5W LED module (SMD)
- Complete with LED driver
- Can be used as soffit light
- IP65 rated front and back



CCT switch

INTERCHANGEABLE BEZELS

Satin nickel, chrome, black, antique brass,
polished brass and anthracite grey



Code	Description	Finish	K	LM	LM/W	Dimensions	Cut Out
108763	ShieldLITE 4CCT	Matt white	2700/3000/4000/6000	520	104	Proj: 3mm Dia: 81mm H: 47mm	50mm
114584	ShieldECO Bezel	Satin nickel	-	-	-	Proj: 6mm Dia: 85mm	-
114585	ShieldECO Bezel	Chrome	-	-	-	Proj: 6mm Dia: 85mm	-
114586	ShieldECO Bezel	Black	-	-	-	Proj: 6mm Dia: 85mm	-
114587	ShieldECO Bezel	Antique brass	-	-	-	Proj: 6mm Dia: 85mm	-
114588	ShieldECO Bezel	Polished brass	-	-	-	Proj: 6mm Dia: 85mm	-
114589	ShieldECO Bezel	Anthracite grey	-	-	-	Proj: 6mm Dia: 85mm	-

Order online www.saxbytrade.com

SHIELDECO TRIMLESS ACCESSORY

Trimless bezel creating a clean, seamless finish



- Constructed from steel
- Combined unit not fire rated



PAIR WITH ME!

Compatible with the ShieldECO CCT only.
See page 23 for more details on this product...



Code	Description	Finish	Dimensions	Cut Out	Min Void
75917	Trimless Bezel Round	Matt white	H: 40mm Dia: 135mm	85mm	150mm


RECESSED TRIMLESS

Trimless plaster-in luminaire for a clean, seamless finish

- 
2YR
WARRANTY
- 
CLASS 1
- 
DIMMABLE
- 
FIRE RATED
30,60,90 MINS




- Constructed from die cast aluminium alloy & steel
- Plaster into the ceiling
- H: 146mm Dia: 120mm



• We recommend to use with Lamp: 112545,112546, 112547 (Additional spec can be found on page 351)

Code	Description	Finish	Lamp	Cut Out	Min Void
81572	Ravel Trimless FR Downlight	Matt white	GU10 (required)	75mm	149mm
103028	Ravel Trimless FR Downlight	Matt black	GU10 (required)	75mm	149mm

STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

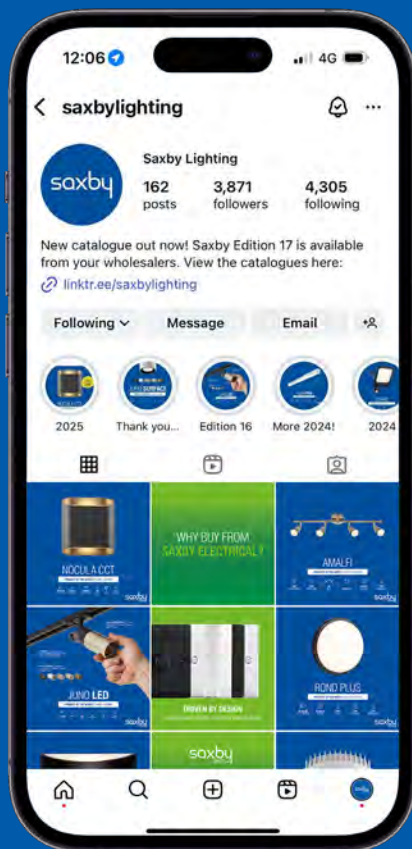

Follow us on Facebook,
X, Instagram and LinkedIn



TRIMLESS LINKABLE

Plaster-in downlight with unique, linkable modular design


2YR
WARRANTY


CLASS 2


DIMMABLE


IP20
RATED

LED
COMPATIBLE

FAST
FIX



Trimless linkable design



- Constructed from die cast aluminium alloy & steel



Dovetail together

Code	Description	Finish	Lamp	Dimensions	Cut Out
103941	Trimless Linkable	Matt white	GU10 (required)	L: 99.6mm W: 99.6mm D: 46mm	68mm

Order online www.saxbytrade.com

TRIMLESS TILT

Round and square plaster-in tiltable fittings


2YR
WARRANTY


CLASS 2


DIMMABLE


20°
TILT



- Constructed from die cast aluminium alloy



Code	Description	Finish	Lamp	Dimensions	Cut Out	Min Void
78954	Trimless Downlight Round	Matt white	GU10 (required)	Proj: 55mm Dia: 120mm	Dia: 82mm	130mm
92538	Trimless Downlight Round	Matt black	GU10 (required)	Proj: 55mm Dia: 120mm	Dia: 82mm	130mm
78955	Trimless Downlight Square	Matt white	GU10 (required)	Proj: 55mm Sq: 122mm	Sq: 85mm	130mm
94754	Trimless Downlight Twin	Matt white	GU10 (required)	Proj: 56mm L: 210mm W: 122mm	175mm x 85mm	130mm

RECESSED TRIMLESS



UP TO
240
LUMENS



Lalo Dimmable Driver

- Constructed from die cast aluminium alloy & acrylic
- 4W LED module (COB)



99559

Code	Description	Finish	K	LM	Dimensions	Cut Out	Min Void	
99559	Lalo Tilt 4W	 IP20	Matt white	3000	240	Proj: 2mm Dia: 50mm H: 24mm	45mm	24mm
99557	Lalo 4W	 IP44	Matt black	3000	200	Proj: 2mm Dia: 45mm H: 24mm	35mm	24mm
91513	Lalo 4W	 IP44	Matt white	3000	240	Proj: 2mm Dia: 45mm H: 24mm	35mm	24mm
92518	Lalo 4W	 IP44	Matt white	4000	240	Proj: 2mm Dia: 45mm H: 24mm	35mm	24mm
92519	Lalo Dimmable Driver	-	-	-	-	-	-	

CAST FIXED & TILT

Practical and stylish fixed and adjustable downlights


2YR
WARRANTY


CLASS 2


DIMMABLE

LED
COMPATIBLE



Without lamp



Lampholder included

- Constructed from die cast aluminium alloy

Code	Description	Finish	Lamp	Dimensions	Min Void	Cut Out
95918	Cast Fixed	Matt black	GU10 (required)	Proj: 3mm Dia: 80mm	95mm	70mm
76006	Cast Fixed	Matt white	GU10 (required)	Proj: 3mm Dia: 80mm	95mm	70mm
52331	Cast Fixed	Gloss white	GU10 (required)	Proj: 3mm Dia: 80mm	95mm	70mm
52330	Cast Fixed	Satin nickel	GU10 (required)	Proj: 3mm Dia: 80mm	95mm	70mm
52329	Cast Fixed	Chrome plate	GU10 (required)	Proj: 3mm Dia: 80mm	95mm	70mm
95919	Cast Tilt	Matt black	GU10 (required)	Proj: 3mm Dia: 95mm	95mm	80mm
76007	Cast Tilt	Matt white	GU10 (required)	Proj: 3mm Dia: 95mm	95mm	80mm
52334	Cast Tilt	Gloss white	GU10 (required)	Proj: 3mm Dia: 95mm	95mm	80mm
52333	Cast Tilt	Satin nickel	GU10 (required)	Proj: 3mm Dia: 95mm	95mm	80mm
52332	Cast Tilt	Chrome plate	GU10 (required)	Proj: 3mm Dia: 95mm	95mm	80mm

RECESSED DOWNLIGHT



CONVERSE

Converter plate to replace older incandescent downlights

- 
2YR
WARRANTY
- 
CLASS 2
- 
DIMMABLE



- Constructed from steel
- Proj: 14mm Dia: 140mm



Lampholder included

Code	Description	Finish	Lamp	Cut Out	Min Void
70417	Converse Bezel	Matt white	GU10 (required)	65 -125mm	92mm
52485	Converse Bezel	Satin nickel	GU10 (required)	65 -125mm	92mm
70418	Converse Bezel	Chrome plate	GU10 (required)	65 -125mm	92mm

RECESSED DOWNLIGHT



LED
COMPATIBLE




- Constructed from die cast aluminium alloy



Lampholder included

Code	Description	Finish	Lamp	Dimensions	Cut Out	Min Void
78530	Xeno Single	Matt white	GU10 (required)	Proj: 3mm Sq: 90mm	79 x 79mm	150mm
78531	Xeno Twin	Matt white	GU10 (required)	Proj: 3mm L: 180mm W: 90mm	79 x 168mm	150mm
78532	Xeno Triple	Matt white	GU10 (required)	Proj: 3mm L: 270mm W: 90mm	79 x 258mm	150mm
94795	Xeno Single	Matt black	GU10 (required)	Proj: 3mm Sq: 90mm	79 x 79mm	150mm
94796	Xeno Twin	Matt black	GU10 (required)	Proj: 3mm L: 180mm W: 90mm	79 x 168mm	150mm
94797	Xeno Triple	Matt black	GU10 (required)	Proj: 3mm L: 270mm W: 90mm	79 x 258mm	150mm

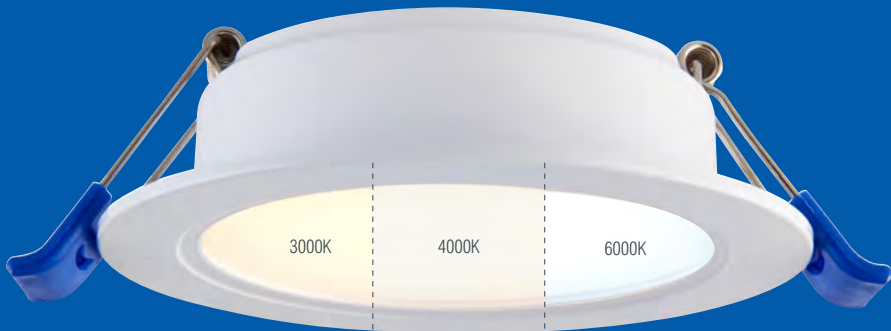

3K/4K/6K
CCT SWITCH



12CM
PRE WIRED CABLE



26MM PROFILE
ULTRA SLIM



120°
BEAM

CIRCO

Ultra slim, high lumen downlight

The Circo is our ultra slim downlight, an ideal choice for all office and corridor lighting. Colour selectable with the switch on the back of the fitting, choose from 3000K/4000K/6000K. The backlit technology and high power SMD LEDs offer an even, superior light output, with no dark spots and reduced glare. Comes prewired with 12cm of two core flex. Available in 5W,9W,18W & 24W.



UP TO
2100
LUMENS

ULTRA
SLIM
PROFILE



103835



103836




103837



103838

- Constructed from polycarbonate & polystyrene
- LED module (SMD)



CCT switch

Code	Description	K	LM	LM/W	Dimensions	Cut Out
103835	Circo 5W CCT	3000/4000/6000	400	80	Proj: 1mm Dia: 95mm H: 26mm	75mm
103836	Circo 9W CCT	3000/4000/6000	720	80	Proj: 1mm Dia: 120mm H: 26mm	90mm
103837	Circo 18W CCT	3000/4000/6000	1600	89	Proj: 1mm Dia: 170mm H: 26mm	140mm
103838	Circo 24W CCT	3000/4000/6000	2100	88	Proj: 1mm Dia: 220mm H: 26mm	190mm

LAMPHOLDERS

Range of lampholders for GU10 and MR16 lamps



LHGU10



LHGU53




78263

Code	Description	Dimensions
LHGU10	GU10 Lampholder 50W	H: 88mm W: 25mm L: 185mm
LHGU53	MR16 Lampholder 50W	H: 15mm W: 15mm L: 160mm
78263	GU10 Lampholder & Fast Fix Box 50W	H: 30mm W: 45mm L: 240mm

RECESSED ACCESSORIES

POWERLINK CONNECTOR

3/8 way lever terminal block

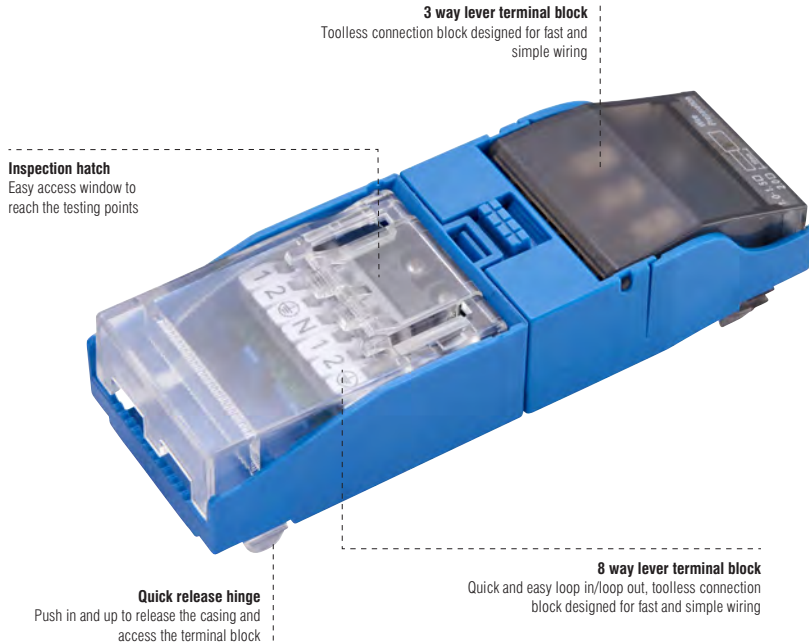

- Constructed from acrylic & polycarbonate

FIRST FIX INSTALL

8-way terminal block with loop in/out terminals.



TESTING POINTS

Integrated testing points for GS38 approved probes.



SECOND FIX INSTALL

Detachable connector for easy removal during testing.



Code	Description	Finish	Dimensions
109801	PowerLINK Connector	Blue plastic & smokey acrylic finish	H: 33mm W: 45mm L: 130mm

Order online www.saxbytrade.com

MAKING THE MOST OF

SAXBYTRADE.COM



1400+
PRODUCTS



NO MINIMUM
ORDER VALUE



NEXT DAY DELIVERY
FROM STOCK



DELIVER DIRECT
TO SITE



ONLINE IMAGE
& DATA LIBRARY



NEW STOCK
ARRIVING DAILY



HUGE STOCK
HOLDING



EXPERT
SUPPORT TEAM



TECHNICAL SPEC
ACCESS



BRANCH
LOCATOR



ETHICAL &
QUALITY ASSURED



30 YEAR
EXPERIENCE

HEATGUARD

Intumescent downlight fire hood

2YR
WARRANTY

FIRE RATED
60 MINS

EASY
INSTALL



- Constructed from fireproof fabric

Code	Description	Dimensions	Min Void
FH150	Heatguard Small Round	H: 150mm Dia: 150mm	165mm

Order online www.saxbytrade.com



COMMERCIAL

From complex high bays to budget battens, Saxby Lighting has it all. We have a wide selection of commercial fittings that are ideal for working environments, so whether it's a warehouse or an office, Saxby Lighting has the solution.

DOWNLIGHT	59
PANEL	68
SUSPENSION	77
BATTEN	82
HIGH BAY	99
BULKHEAD	108
FLUSH	118
TRACK	121
SURFACE DOWNLIGHT	134

LOW PROFILE HIGH PERFORMANCE



PARAGON CCT

The NEW diecast commercial downlight from Saxby Lighting,
ideal for offices, retail spaces, and industrial settings.



3K/4K/6K
CCT SWITCH



23W/25W/27W/29W
WATTAGE SWITCH



EMERGENCY
COMPATIBLE



5YR
WARRANTY

PARAGON CCT

High performance, wattage selectable commercial downlight


5YR
WARRANTY


CLASS 2


SMD


IP54
RATED

UP TO
4060
LUMENS

140
LM/W

CASAMBI
COMPATIBLE


COMPATIBLE



- Constructed from die cast aluminium alloy & pmma plastic
- 23W/25W/27W/29W selectable
- Lm: 3220/3500/3780/4060
- Complete with LED driver



CCT switch



Twist lock

Code	Description	Finish	K	LM	LM/W	Dimensions	Cut out
114563	Paragon CCT	Matt white	3000/4000/6000	4060	140	H: 66.5mm Dia: 220mm	200mm
108097	Emergency LED Conversion Kit	-	-	-	-	H: 30mm W: 43mm L: 200mm	-
108754	Dali Driver	-	-	-	-	H: 27.5mm W: 46mm L: 145mm	-

Order online www.saxbytrade.com



3K/4K/6K
CCT SWITCH



MULTI WATTAGES
AVAILABLE



EMERGENCY
COMPATIBLE



5 YEAR
WARRANTY

AXIAL CCT

High performance adjustable wall washers

The Axial CCT range consists of high performance downlights, ideal for commercial spaces, but particularly retail as their light projection is changeable due to the tiltable lens. The Axial CCT range contains a variety of sizes and wattages and available in matt white or matt black finishes.

AXIAL CCT

High performance adjustable wall washers



UP TO
2800
LUMENS

WATTAGE
SELECTABLE
FROM 2026

CASAMBI
COMPATIBLE

DALI
COMPATIBLE



----- 90mm -----

----- 101mm -----

----- 140mm -----



Recess functionality

Code	Description	Finish	W	K	LM	LM/W	Dimensions	Min Void	Cut Out
108288	Axial CCT	Matt white	10.5W	3000/4000/6000	900	86	H: 75mm Dia: 90mm	75mm	Dia: 77mm
108289	Axial CCT	Matt white	15W	3000/4000/6000	1400	93	H: 86mm Dia: 101mm	85mm	Dia: 90mm
108290	Axial CCT	Matt white	30W	3000/4000/6000	2800	93	H: 125mm Dia: 140mm	120mm	Dia: 125mm
108291	Axial CCT	Matt black	10.5W	3000/4000/6000	800	76	H: 75mm Dia: 90mm	75mm	Dia: 77mm
108292	Axial CCT	Matt black	15W	3000/4000/6000	1200	80	H: 86mm Dia: 101mm	85mm	Dia: 90mm
108293	Axial CCT	Matt black	30W	3000/4000/6000	2600	87	H: 125mm Dia: 140mm	120mm	Dia: 125mm

Order online www.saxbytrade.com

AXIAL RECTANGULAR

High performance adjustable wall washers



3000
LUMENS

CASAMBI
COMPATIBLE

DALI
COMPATIBLE



- Constructed from die cast aluminium alloy & clear glass
- Matt white finish
- 35W LED module (COB)

Code	Description	K	LM	LM/W	Dimensions	Min Void	Cut Out
78542	Axial Rectangular	4000	3000	86	Proj: 108mm L: 232mm W: 146mm	110mm	130 x 220mm

COMMERCIAL WALL WASHER

SIRIODISC CCT

Ultra slim, high lumen round panel

3YR
WARRANTY

CLASS 2

SMD

IP44
RATED

120°
BEAM


UP TO
2200
LUMENS

ULTRA
SLIM
PROFILE

TPB
RATED

CASAMBI
COMPATIBLE


DALI
COMPATIBLE

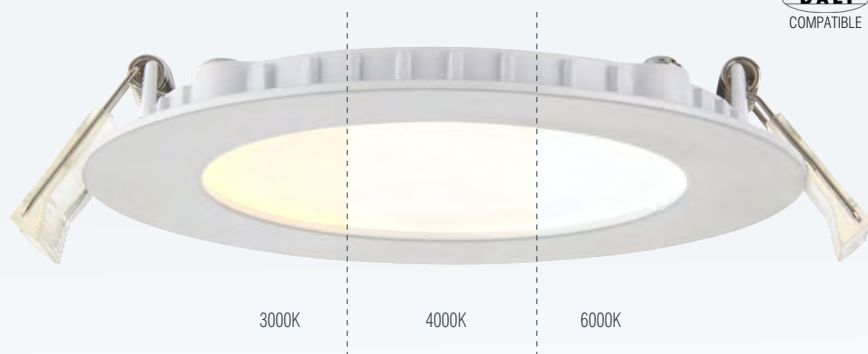

- Constructed from die cast aluminium alloy & frosted acrylic
- Matt white finish




Push fit connector



CCT switch

Code	Description	K	LM	LM/W	Dimensions	Cut Out
90955	SirioDISC 6W	3000/4000/6000	450	75	Proj: 3mm Dia: 120mm H: 19mm	105mm
73719	SirioDISC 12W	3000/4000/6000	1000	83	Proj: 3mm Dia: 174mm H: 19mm	158mm
73720	SirioDISC 18W	3000/4000/6000	1600	89	Proj: 3mm Dia: 224mm H: 19.5mm	205mm
73810	SirioDISC 24W	3000/4000/6000	2200	92	Proj: 3mm Dia: 298mm H: 21mm	280mm

Order online www.saxbytrade.com



ULTRA SLIM
18MM PROFILE



RECESS & SURFACE
MOUNT OPTIONS



ADJUSTABLE BRACKET
50MM-180MM



3YR
WARRANTY

STRATUSDISC ADJUSTABLE

Ultra slim luminaire with versatile mount

The StratusDISC adjustable is an ideal choice for all office and corridor lighting. The ultra slim profile can be placed into the slimmest of voids and the adjustable back means it can fit in any size hole in the ceiling and it can be easily surface mounted as well. The edge lit technology and high power SMD LEDs offer an even, superior light output, with no dark spots and reduced glare.

STRATUSDISC ADJUSTABLE

Ultra slim luminaire with versatile mount


3YR
WARRANTY


CLASS 2


SMD


IP44
RATED



120°
BEAM

1800
LUMENS

ADJUSTABLE
BRACKET

**RECESS &
SURFACE**
MOUNT
OPTIONS

TPA
RATED

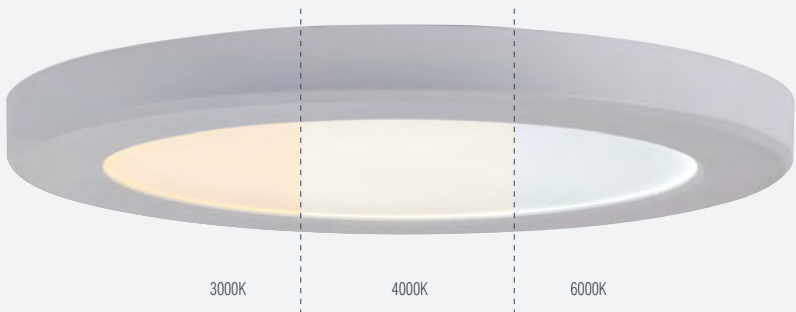

- Constructed from polycarbonate
- Textured matt white finish
- Supplied with a unique adjustable bracket allowing for installation in a cut-out from 50-180mm



Surface Mount



Recessed

Code	Description	K	W	LM	LM/W	Dimensions	Min Void	Cut out
108743	StratusDISC Adjustable CCT	3000/4000/6000	18W	1800	100	H: 18mm Dia: 220mm	30mm	50-180mm

Order online www.saxbytrade.com



**BACK LIT
TECHNOLOGY**



**CCT OPTION
AVAILABLE**



**ECO AND PRO
VERSIONS**



**FAST FIX
TERMINALS**

STRATUS

Saxby's signature backlit panel range

The Stratus range of backlit LED panels offers superior light distribution and proven reliability. White painted steel body, backlit LED module with high efficiency optical design and opal diffuser suitable for use in 15mm or 24mm standard exposed grid ceilings. The range comprises of Base, Pro and Ultra versions, including high lumen output, CCT and IP44 options.

STRATUS BASE



3YR
WARRANTY

4000
LUMENS

100
LM/W

- Budget friendly backlit panel
- 4000K and 6000K options

STRATUS



5YR
WARRANTY

UP TO
4000
LUMENS

UP TO
100
LM/W

- Everyday backlit panel
- 3000K, 4000K and 6000K options

STRATUS PRO



5YR
WARRANTY

UP TO
5600
LUMENS

UP TO
140
LM/W

- Square and rectangular sizes
- High lumen and UGR19 & IP44 options available
- TPA rated

STRATUS ULTRA



5YR
WARRANTY

UP TO
3600
LUMENS

UP TO
180
LM/W

- 4-wattage selectable
- 4000K colour temperature
- TPA rated
- UGR19

STRATUS BASE

Budget friendly backlit panel


3YR
WARRANTY


CLASS 3


SMD


120°
BEAM

4000
LUMENS

CASAMBI
COMPATIBLE


COMPATIBLE



- Constructed from steel & polystyrene & PVC
- White finish



Side profile

Code	Description	W	K	LM	LM/W	Dimensions
106526	Stratus Base	40W	4000	4000	100	Sq: 595mm H: 30mm
106527	Stratus Base	40W	6000	4000	100	Sq: 595mm H: 30mm

COMMERCIAL PANEL

STRATUS

Everyday backlit panel

 **5YR**
WARRANTY

 **CLASS 3**

 **SMD**

 **120°**
BEAM

 **4**
SDCM

UP TO
4000
LUMENS

CASAMBI
COMPATIBLE

DALI
COMPATIBLE



81024



Side profile



81023



81025

- Constructed from aluminium alloy, steel & polystyrene
- White finish

Code	Description	W	K	LM	LM/W	Dimensions
81023	Stratus	40W	3000	3600	90	Sq: 595mm H: 25mm
81024	Stratus	40W	4000	4000	100	Sq: 595mm H: 25mm
81025	Stratus	40W	6000	4000	100	Sq: 595mm H: 25mm
81007	Triac Dimmable Driver	40W	-	-	-	-
108754	Dali Driver	-	-	-	-	-

Order online www.saxbytrade.com

STRATUS PRO

Range of high performance backlit panels for various applications


5YR
WARRANTY


CLASS 3


SMD


120°
BEAM


4
SDCM


UP TO
5600
LUMENS

UP TO
140
LM/W

TPA
RATED

CASAMBI
COMPATIBLE


COMPATIBLE

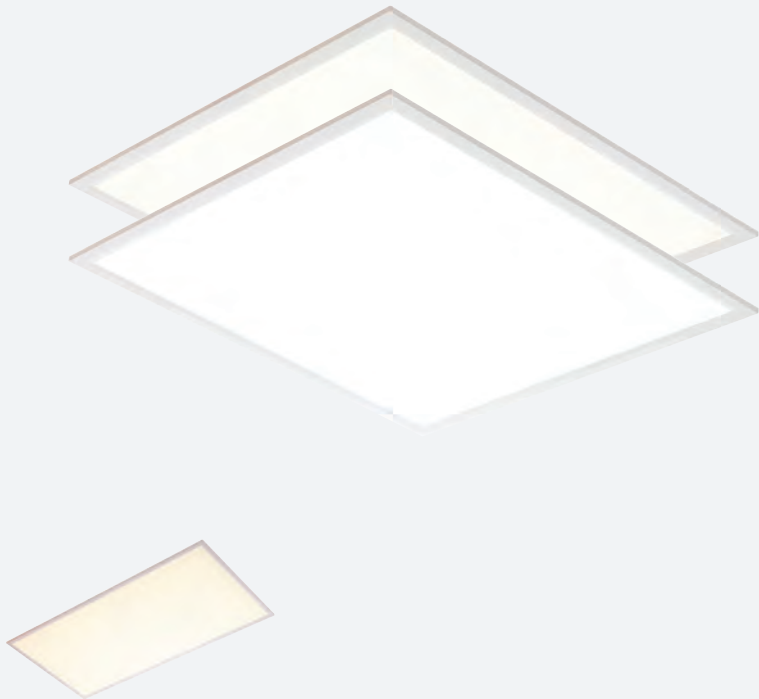

- Wide PCB of light sources (SMD) with super heat radiation, low decay of light and long lifespan
- High brightness and efficiency with even light distribution, no bright spots, no dark areas
- No discolouring of the diffuser over time (yellowish diffuser problem of conventional edge-lit LED panels)
- Pmma optic lenses with high light transmission rate, and larger beam angle

Code	Description	W	K	LM	LM/W	Dimensions
92273	Stratus PRO	40W	4000	4000	100	Sq: 595mm H: 32mm
92274	Stratus PRO	40W	6000	4000	100	Sq: 595mm H: 32mm
92276	Stratus PRO High Lumen	40W	4000	5600	140	W: 595mm L: 1195mm H: 30mm
92277	Stratus PRO High Lumen	40W	6000	5600	140	W: 595mm L: 1195mm H: 30mm
81007	Triac Dimmable Driver	40W	-	-	-	-
108754	Dali Driver	-	-	-	-	-

COMMERCIAL PANEL

STRATUS PRO TPA & UGR19

Range of high performance backlit panels for various applications




UP TO
5600
LUMENS

TPA
RATED

UGR19
RATED

CASAMBI
COMPATIBLE

DALI
COMPATIBLE

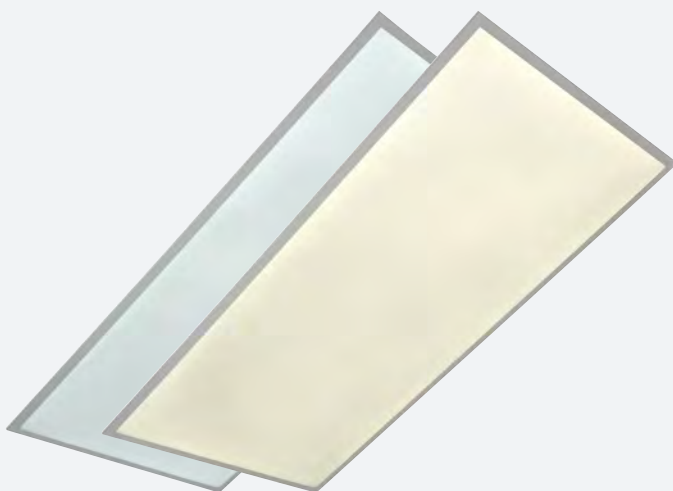

- Constructed from aluminium alloy, steel & polystyrene
- White finish



92542



119327

Code	Description	W	K	LM	LM/W	Dimensions
119327	NEW Stratus PRO TPA & UGR19	40W	4000	4000	100	Proj: 30mm Sq: 595mm
119328	NEW Stratus PRO TPA & UGR19	40W	6000	4000	100	Proj: 30mm Sq: 595mm
92542	Stratus PRO TPA & UGR19	40W	4000	4000	100	Proj: 30mm L: 1195mm W: 295mm
119331	NEW Stratus PRO TPA & UGR19	40W	4000	5600	140	Proj: 30mm L: 1195mm W: 595mm
119332	NEW Stratus PRO TPA & UGR19	40W	6000	5600	140	Proj: 30mm L: 1195mm W: 595mm
81007	Triac Dimmable Driver	40W	-	-	-	-
108754	Dali Driver	-	-	-	-	-

STRATUS PRO CCT

Backlit LED panel with selectable colour temperature

**5YR**
WARRANTY

**CLASS 3**

**SMD**

**IP44**
RATED

**120°**
BEAM


4000
LUMENS

TPA
RATED

UGR19
RATED

CASAMBI
COMPATIBLE


COMPATIBLE

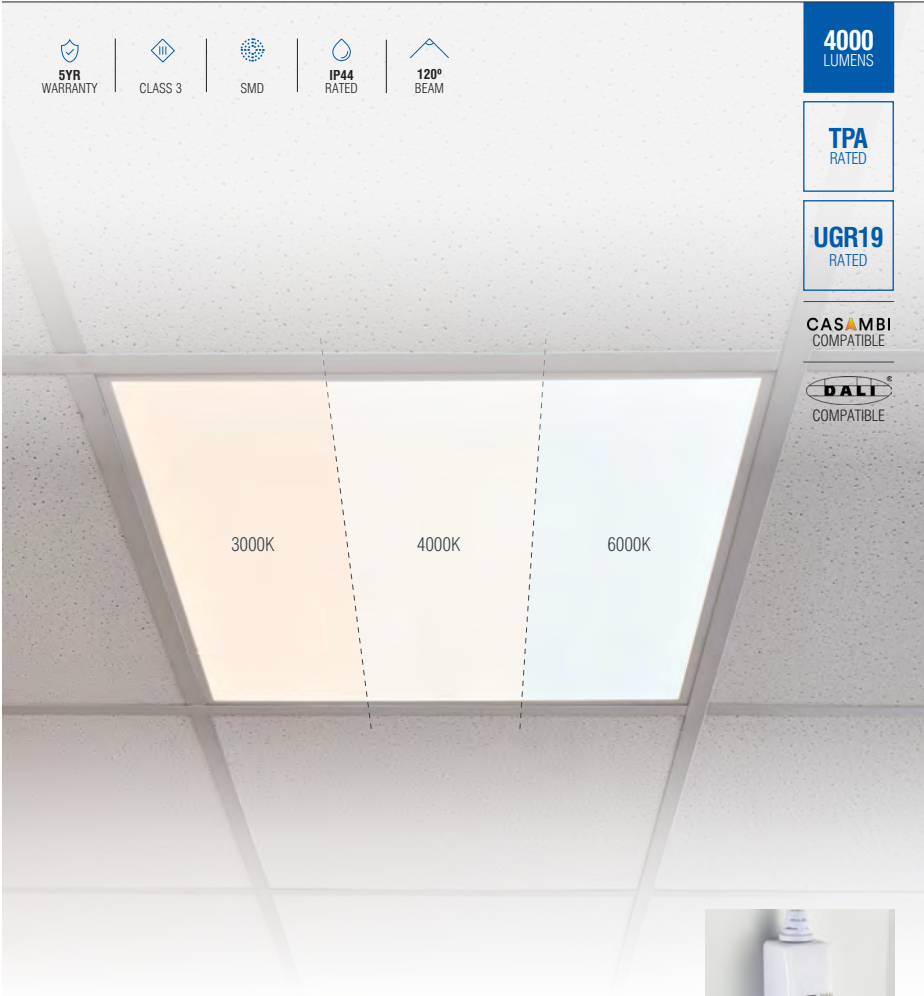

- Constructed from aluminium alloy, steel & polystyrene
- White finish



CCT switch

Code	Description	W	K	LM	LM/W	Dimensions
92543	StratusPRO CCT	40W	3000/4000/6000	4000	100	Sq: 595mm H: 32mm
81007	Triac Dimmable Driver	40W	-	-	-	-
108754	Dali Driver	-	-	-	-	-

COMMERCIAL PANEL

NEW
PRODUCT

STRATUS ULTRA

4 wattage selectable, LED backlit panel


5YR
WARRANTY


CLASS 3


SMD


120°
BEAM

4000
LUMENS

UP TO
180
LM/W

TPA
RATED

UGR19
RATED

CASAMBI
COMPATIBLE


COMPATIBLE



- Constructed from aluminium & steel & polystyrene
- White finish
- Proj: 30mm Sq: 595mm

Code	Description	W	K	LM	LM/W
119329	NEW Stratus ULTRA UGR19	15W/19W/21W/25W	4000	2200/2800/3200/3600	144
119330	NEW Stratus ULTRA UGR19	14W/15.5W/17.5W/20W	4000	2500/2800/3200/3600	180

Order online www.saxbytrade.com


STRATUS ACCESSORIES

Accessories for the Stratus range

81744



81850



92822



92823



91237



Pack of 4

108097



Code	Description	Finish	Dimensions
81744	Stratus Suspension Kit (4 cables)	Bright zinc	L: 200-1000mm
81850	Surface Mount Kit (for 595 x 595mm)	Gloss white	Proj: 68mm Sq: 600mm
92822	Surface Mount Kit (for 1195 x 595mm)	Gloss white	Proj: 68mm L: 1200mm W: 600mm
92823	Surface Mount Kit (for 1195 x 295mm)	Gloss white	Proj: 68mm L: 1200mm W: 300mm
91237	Recess Clip Kit (4 clips)	-	-
108097	Emergency LED Conversion Kit	-	-

COMMERCIAL PANEL

NEW
OPTION

SIRIO FRAME

Innovative luminaire providing a decorative frame of light

 **3YR**
WARRANTY

 **CLASS 2**

 **SMD**

 **120°**
BEAM

4000
LUMENS

CASAMBI
COMPATIBLE

DALI
COMPATIBLE

- Constructed from aluminium alloy & opal polycarbonate
- Gloss white finish

Code	Description	W	K	LM	LM/W	Dimensions
78546	Sirio Frame	40W	4000	4000	100	Sq: 591mm H: 16mm
118815 NEW	Sirio Frame	40W	6000	4000	100	Sq: 591mm H: 16mm
81007	Triac Dimmable Driver	40W	-	-	-	-
108754	Dali Driver	-	-	-	-	-

Order online www.saxbytrade.com



3K/4K/6K
CCT SWITCH



30W/50W
WATTAGE SWITCH



LINKABLE
DESIGN



PUSH-FIT
TERMINALS

LINUS

Versatile & modular suspension or surface light fitting

Linus is the new modular linear fitting with suspension and surface mount capabilities by Saxby Lighting. Available in black or white, it features a CCT switch (3000K, 4000K, and 6000K) and a 2m suspension kit, providing versatility and precision in lighting commercial spaces. Producing 5000 lumens at 100lm/w, Linus delivers bright, efficient illumination and can be linked with connectors in the range for longer runs, making it ideal for offices, retail environments, and modern workspaces.




UP TO
5000
LUMENS

LINKABLE

UP LIGHT
OPTION

EMERGENCY
CONVERSION

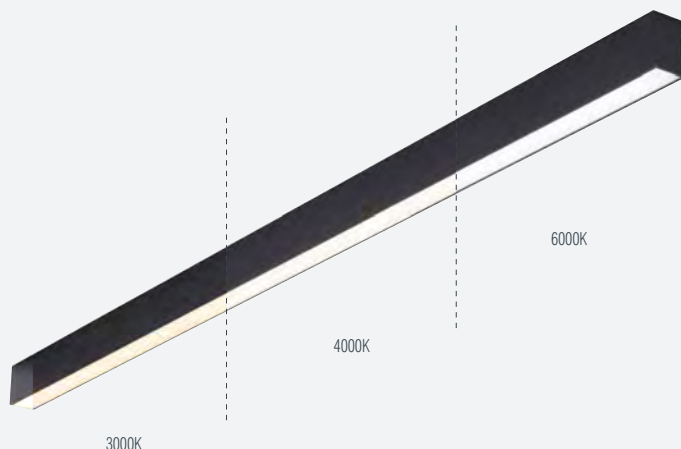

121115



121116



121117

- Constructed from aluminium & polycarbonate
- Emergency option with UK conversion
- Linkable kit included
- Can be surface and suspension mounted
- 3000/4000/6000K



Suspension kit included

Code	Description	Finish	W	LM	LM/W	Dimensions
121113 NEW	Linus	Matt white	30/50W	5000	100	H: 68.4-2000mm L: 1500mm W: 45mm
121114 NEW	Linus	Matt black	30/50W	5000	100	H: 68.4-2000mm L: 1500mm W: 45mm
121115 NEW	Linus Back Lit CCT Module	White	10W	450	45	H: 32.6mm L: 825mm W: 42.6mm
121116 NEW	Linus L Shape Connector	Matt white	8/15W	1140	76	H: 68.4mm W: 225mm L: 225mm
121117 NEW	Linus L Shape Connector	Matt black	8/15W	1140	76	H: 68.4mm W: 225mm L: 225mm

KINGSLEY

Slim, linear suspended modular fitting




UP TO
3600
LUMENS

LINKABLE

UP/DOWN
LIGHT



- Constructed from aluminium alloy & frosted polycarbonate
- Max. connect power 400W



92521

Code	Description	Finish	W	K	LM	LM/W	Dimensions
78978	Kingsley	Silver anodised	40W	4000	3600	90	H: 94.2-1500mm W: 20mm L: 1500mm
92520	Kingsley	Silver anodised	25W	4000	2000	80	H: 94.2-1500mm W: 20mm L: 610mm
92521	90 Degrees Corner	Silver anodised	3W	4000	350	117	H: 94.2mm W: 138mm L: 138mm

COMMERCIAL SUSPENSION

BORDE CCT / DUAL WATTAGE

Sleek linear fitting in single and twin options


5YR
WARRANTY


CLASS 1


SMD


IK08
RATED


120°
BEAM

UP TO
4800
LUMENS



- Constructed from aluminium alloy & polycarbonate
- Silver finish
- Suspension kit included



91952 - Surface mount kit



Surface mount brackets



Wattage/CCT switch

Code	Description	W	K	LM	LM/W	Dimensions
59995	Borde Single	18W/24W	3000/4000/6000	1800/2400	100	H: 40-1500mm L: 1494mm W: 68mm
59996	Borde Twin	36W/48W	3000/4000/6000	3600/4800	100	H: 40-1500mm L: 1494mm W: 156mm
91952	Surface Mount Kit	-	-	-	-	-

AUSTEN

Height adjustable suspended linear fitting

NEW
PRODUCT

3YR
WARRANTY

CLASS 1

SMD

DIMMABLE

120°
BEAM

2340
LUMENS



3000K



4000K



6000K

- Constructed from steel & acrylic



CCT switch




Fast fix

Code	Description	Finish	W	K	LM	LM/W	Dimensions
120816	NEW Austen	Matt white	28W	3000/4000/6000	2340	84	H: 600-1500mm L: 1500mm W: 60mm

COMMERCIAL SUSPENSION

MAKING THE MOST OF

SAXBYTRADE.COM

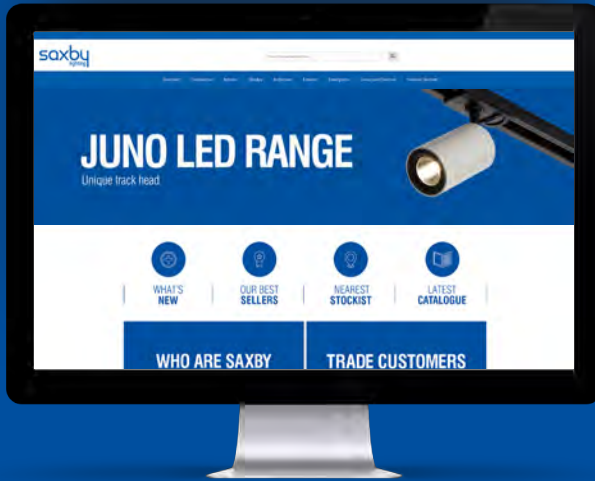

1400+
PRODUCTS



NO MINIMUM
ORDER VALUE



NEXT DAY DELIVERY
FROM STOCK



DELIVER DIRECT
TO SITE



ONLINE IMAGE
& DATA LIBRARY



NEW STOCK
ARRIVING DAILY



HUGE STOCK
HOLDING



EXPERT
SUPPORT TEAM



TECHNICAL SPEC
ACCESS



BRANCH
LOCATOR



ETHICAL &
QUALITY ASSURED



30 YEAR
EXPERIENCE

ALOKA CCT

Budget friendly batten

NEW
PRODUCT

3YR
WARRANTY


CLASS 2

SMD

120°
BEAM

3960
LUMENS

0.8M
PRE WIRED
CABLE

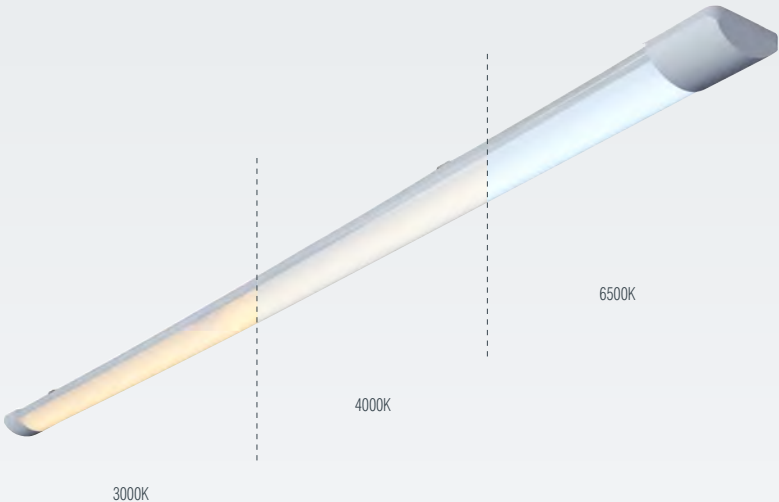

Pre wired cable



CCT switch

Code	Description	Finish	W	K	LM	LM/W	Dimensions
119097	NEW Alokā CCT	Gloss white	36W	3000/4000/6500	3960	110	L: 1500mm Proj: 27mm W: 71mm

COMMERCIAL BATTEN



2500
LUMENS



- Constructed from polycarbonate & aluminium alloy
- Matt white finish



Suspension clips for easy installation


Code	Description	W	K	LM	LM/W	Dimensions
73534	EcoLinear 5ft	22W	4000	2500	114	Proj: 44mm L: 1500mm W: 28.5mm



**PUSH FIT
TERMINALS**



**BESA BOX
COMPATIBLE**



**4FT, 5FT & 6FT
LENGTHS**



**EMERGENCY
AVAILABLE**

RULAR

High performance, slimline LED batten

The Rular offers comparable performance to T8 products. Using the latest in LED technology coupled with high performance light diffusion materials to eliminate the LED spots that you can get on other products. The smart design means that they can be used in a variety of locations, from offices and corridors to garages and utility rooms. These have significant energy savings when compared to fluorescent products, saving money with no sacrifices in light output.

Available in a variety of lengths, lumen outputs and emergency versions.

RULAR PLUS

High performance LED battens



UP TO
4900
LUMENS

140
LM/W

**BESA
BOX**
COMPATIBLE



- Constructed from polycarbonate & steel
- Gloss white finish
- EM Kit: manual and self-test 2-in-1
- Microwave kit available: 116744
- Emergency kit available: 107137
- EM uses LiFePO4 battery



Quick release hinge




Fast fix

Code	Description	W	K	LM	LM/W	Dimensions
107125	Rular PLUS 4ft	20W	4000	2800	140	L: 1200mm Proj: 65.5mm W: 59mm
107126	Rular PLUS 5ft	26W	4000	3640	140	L: 1500mm Proj: 65.5mm W: 59mm
107127	Rular PLUS 6ft	35W	4000	4900	140	L: 1800mm Proj: 65.5mm W: 59mm
107131	Rular PLUS 4ft EM	20W	4000	2800	140	L: 1200mm Proj: 65.5mm W: 59mm
107132	Rular PLUS 5ft EM	26W	4000	3640	140	L: 1500mm Proj: 65.5mm W: 59mm
107133	Rular PLUS 6ft EM	35W	4000	4900	140	L: 1800mm Proj: 65.5mm W: 59mm

Order online www.saxbytrade.com

RULAR PRO

Wattage selectable, high performance LED battens

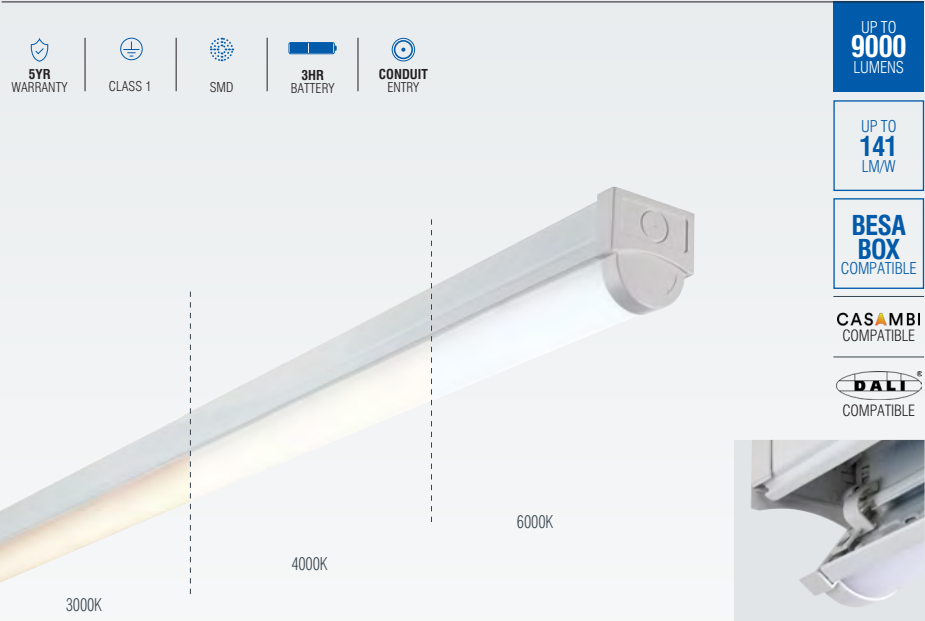

- Constructed from polycarbonate & steel
- Gloss white finish
- EM Kit: manual and self-test 2-in-1
- 3000K/4000K/6000K
- Microwave kit available: 116744
- Emergency kit available: 107137
- EM uses LiFePO4 battery



Quick release hinge



CCT switch



Fast fix

Code	Description	W	LM	LM/W	Dimensions
107138	Rular PRO 4ft	20W/31.5W	2800/4410	140	L: 1200mm Proj: 65.5mm W: 59mm
107139	Rular PRO 5ft	26W/39W	3640/5460	140	L: 1500mm Proj: 65.5mm W: 59mm
107140	Rular PRO 6ft	35W/44W	4900/6160	140	L: 1800mm Proj: 65.5mm W: 59mm
107141	Rular PRO 4ft EM	20W/31.5W	2800/4410	140	L: 1200mm Proj: 65.5mm W: 59mm
107142	Rular PRO 5ft EM	26W/39W	3640/5460	140	L: 1500mm Proj: 65.5mm W: 59mm
107143	Rular PRO 6ft EM	35W/44W	4900/6160	140	L: 1800mm Proj: 65.5mm W: 59mm
113952	Rular PRO High Lumen 5ft	28W/39W/48W/57W	3920/5460/6720/7980	140	L: 1500mm Proj: 65.5mm W: 59mm
113953	Rular PRO High Lumen 6ft	32W/44W/55W/64W	4510/6200/7750/9000	141	L: 1800mm Proj: 65.5mm W: 59mm
113954	Rular PRO High Lumen 5ft EM	28W/39W/48W/57W	3920/5460/6720/7980	140	L: 1500mm Proj: 65.5mm W: 59mm
113955	Rular PRO High Lumen 6ft EM	32W/44W/55W/64W	4510/6200/7750/9000	141	L: 1800mm Proj: 65.5mm W: 59mm

COMMERCIAL BATTEN

RULAR PRO

Wattage selectable, high performance LED battens




UP TO
9000
LUMENS

UP TO
141
LM/W


BESA
BOX
COMPATIBLE

CASAMBI
COMPATIBLE

DALI
COMPATIBLE

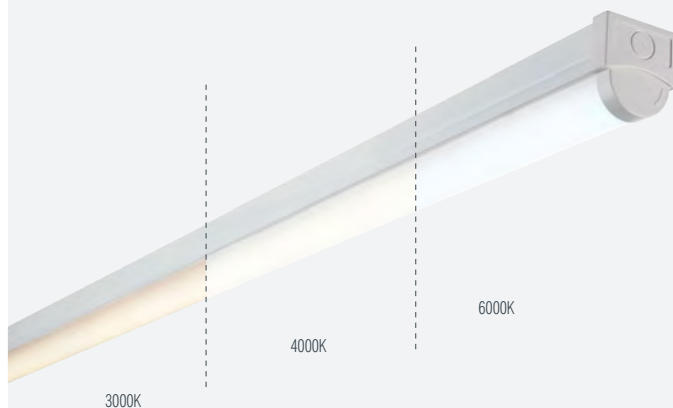

Quick release hinge



CCT switch



Fast fix

- Constructed from polycarbonate & steel
- Gloss white finish
- 3000/4000/6000K
- EM uses LiFePO4 battery

Code	Description	W	LM	LM/W	Dimensions
108867	Rular PRO 4ft MW	20W/31.5W	2800/4410	140	L: 1200mm Proj: 65.5mm W: 59mm
108868	Rular PRO 5ft MW	26W/39W	3640/5460	140	L: 1500mm Proj: 65.5mm W: 59mm
108869	Rular PRO 6ft MW	35W/44W	4900/6160	140	L: 1800mm Proj: 65.5mm W: 59mm
108870	Rular PRO 4ft MW EM	20W/31.5W	2800/4410	140	L: 1200mm Proj: 65.5mm W: 59mm
108871	Rular PRO 5ft MW EM	26W/39W	3640/5460	140	L: 1500mm Proj: 65.5mm W: 59mm
108872	Rular PRO 6ft MW EM	35W/44W	4900/6160	140	L: 1800mm Proj: 65.5mm W: 59mm
113956	Rular PRO High Lumen 5ft MW	28W/39W/48W/57W	3920/5460/6720/7980	140	L: 1500mm Proj: 65.5mm W: 59mm
113957	Rular PRO High Lumen 6ft MW	32W/44W/55W/64W	4510/6200/7750/9000	141	L: 1800mm Proj: 65.5mm W: 59mm
113958	Rular PRO High Lumen 5ft MW EM	28W/39W/48W/57W	3920/5460/6720/7980	140	L: 1500mm Proj: 65.5mm W: 59mm
113959	Rular PRO High Lumen 6ft MW EM	32W/44W/55W/64W	4510/6200/7750/9000	141	L: 1800mm Proj: 65.5mm W: 59mm

Order online www.saxbytrade.com

MICROWAVE & PIR SENSORS

Compatible with Rular, Endura & Dual LED




103850



103022



103023

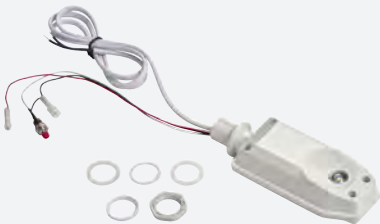

120808

- 103850
- Complete with built in Photocell & PIR
 - 10 lux on, 50 lux off.
 - 150° detection angle, 6mm maximum range with a 5 sec - 30 min timer function
 - Max. 400W driver load

- 103022
- Complete with built in PIR
 - 10 lux on, 50 lux off, 10m maximum range with a 10 sec - 60 min timer function
 - Max. 400W driver load

Code	Description	Dimensions
103850	Microwave Sensor	 H: 35mm W: 70mm L: 93mm
103022	Batten Plug-in PIR Sensor	 H: 28mm W: 36.4mm L: 149mm
103023	Batten Plug-in PIR Sensor Remote Control	 H: 7.5mm W: 25mm L: 85mm
120808	NEW Batten Plug-in EM	 L: 142.1mm W: 56mm H: 39mm

COMMERCIAL BATTEN

DUAL LED

Wattage selectable, high performance LED battens


5YR
WARRANTY


CLASS 1



SMD


3HR
BATTERY

UP TO
5800
LUMENS

CASAMBI
COMPATIBLE

DALI
COMPATIBLE

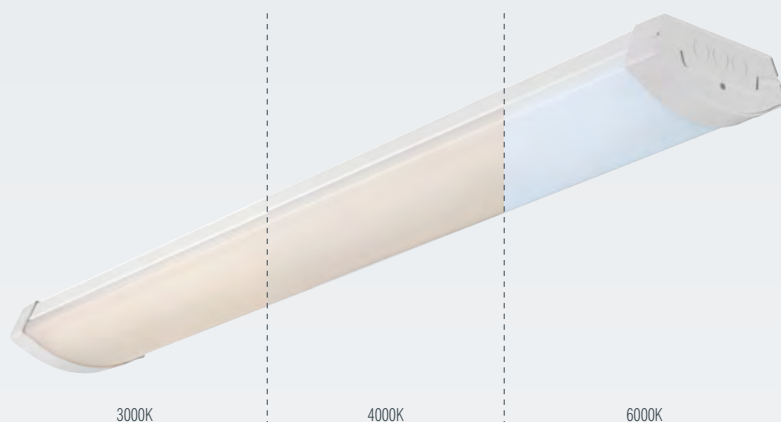

- Constructed from polycarbonate & steel
- Matt white finish
- Microwave kit available: 101456
- Emergency kit available: 111484
- EM uses LiFePO4 battery



Besa box



Fast fix

Code	Description	W	K	LM	LM/W	Dimensions
101336	Dual LED 4ft	21W/27W/32W/38W	3000/4000/6000	3800	100	L: 1194mm W: 200mm D: 82mm
101338	Dual LED 5ft	32W/41W/50W/58W	3000/4000/6000	5800	100	L: 1495mm W: 200mm D: 82mm
104024	Dual LED 4ft EM	21W/27W/32W/38W	3000/4000/6000	3800	100	L: 1194mm W: 200mm D: 82mm
104025	Dual LED 5ft EM	32W/41W/50W/58W	3000/4000/6000	5800	100	L: 1495mm W: 200mm D: 82mm

Order online www.saxbytrade.com



3K/4K/6.5K
CCT SWITCH



PUSH FIT
TERMINALS



4FT/5FT/6FT
LENGTHS



IP65
RATED

ENDURA

Tough & robust LED battens

Endura is a robust and efficient LED batten range, designed for high performance with reduced energy consumption. Constructed from durable polycarbonate and IK08 impact rated, it's built to withstand demanding environments. Dual wattage functionality offers added versatility, while conduit knockouts on the sides, front and back ensure flexible installation. CCT technology gives you the option of 3000K, 4000K and 6500K. Available in 4ft, 5ft, and 6ft lengths, with emergency options also offered.

STAINLESS STEEL CLIPS

Lock in place side clips which can hold at 90° for easy access.

END CONDUIT KNOCKOUT

M20 end conduit entry point.

POLYCARBONATE BASE

This provides protection against impact with a rating of IK08.

SIDE CONDUIT KNOCKOUT

6x M20 side conduit entry points.

COLOUR CHANGING TECHNOLOGY

Choose between 3000K, 4000K, 6500K at the flick of a switch.

LEDs

High quality SMD LEDs delivering 150LM per watt.

ALUMINIUM LED MOUNTED TRAY

The heat sink for the LED strip.

POLYCARBONATE DIFFUSER

The opal diffuser provides a wide beam angle and diffuses the light evenly.

ENDURA

Saxby's signature robust anti-corrosive batten range

NEW
PRODUCT


5YR
WARRANTY


CLASS 1


SMD


IP65
RATED



IK08
RATED

UP TO
8550
LUMENS

150
LM/W

CASAMBI
COMPATIBLE


COMPATIBLE

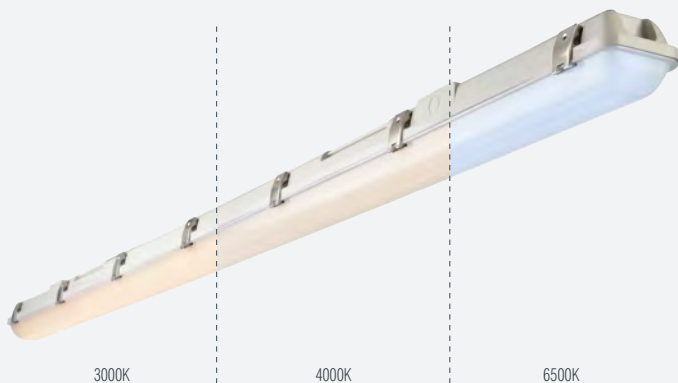

3000K

4000K

6500K

- Constructed from polycarbonate
- Frosted & grey pc
- EM uses LiFePO4 battery



120996



Fast fix



Conduit side entry

Code	Description	K	W	LM	LM/W	Dimensions
120553 NEW	Endura 4ft	3000/4000/6500	19W/30W	2850/4500	150	L: 1265mm Proj: 78mm W: 90mm
120554 NEW	Endura 5ft	3000/4000/6500	24W/50W	3600/7500	150	L: 1565mm Proj: 78mm W: 90mm
120555 NEW	Endura 6ft	3000/4000/6500	35W/57W	5250/8550	150	L: 1830mm Proj: 78mm W: 90mm
120997 NEW	Endura 4ft EM	3000/4000/6500	19W/30W	2850/4500	150	L: 1265mm Proj: 78mm W: 90mm
120998 NEW	Endura 5ft EM	3000/4000/6500	24W/50W	3600/7500	150	L: 1565mm Proj: 78mm W: 90mm
120999 NEW	Endura 6ft EM	3000/4000/6500	35W/57W	5250/8550	150	L: 1830mm Proj: 78mm W: 90mm
120996 NEW	Microwave Sensor - Internal	-	-	-	-	L: 30mm Proj: 33mm W: 101.8mm

COMMERCIAL BATTEN

OUR PRODUCTS



SAFE, FAST FIX
INSTALLATION



THE RIGHT PRODUCT
FOR THE JOB



MORE FUNCTIONALITY
THE RIGHT PRICE



INDUSTRY LEADING
WARRANTIES

OUR SERVICE



SAXBY TRADE
EXCLUSIVE PORTAL



TECHNICAL SUPPORT
LIGHTING DESIGN




NEXT DAY DELIVERY
4PM CUT OFF



MARKETING
SUPPORT

STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

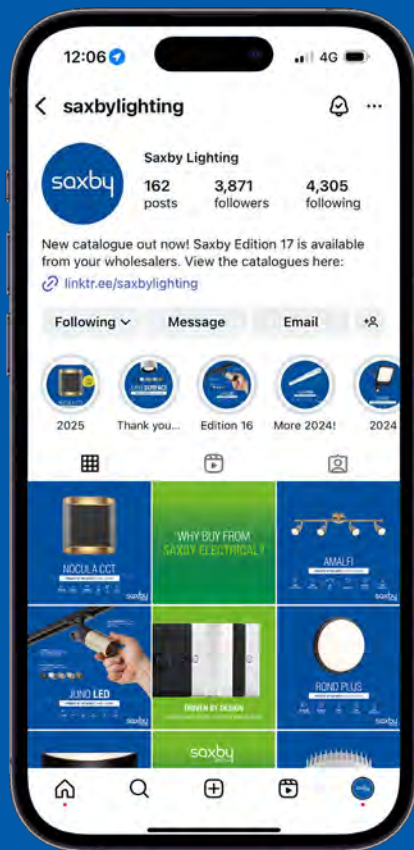

Follow us on Facebook,
X, Instagram and LinkedIn



REEVE ECO

Tough & robust weatherproof LED battens


3YR
WARRANTY


CLASS 2


SMD


IP65
RATED

3300
LUMENS

1M
PRE WIRED
CABLE



- Constructed from polycarbonate



Clip for easy installation

Code	Description	W	K	LM	LM/W	Dimensions
110964	Reeve ECO 5ft	33W	4000	3300	100	L: 1450mm Proj: 34mm W: 53mm

Order online www.saxbytrade.com

REEVE CONNECT

Connectable anti-corrosive LED batten



- 
3YR
WARRANTY
- 
CLASS 2
- 
SMD
- 
IP65
RATED
- 
120°
BEAM

4000
LUMENS

LINKABLE
BATTENS

- Opal & gloss white polycarbonate finish
- LED module (SMD)
- Connect up to 12 fittings



Connectable

Code	Description	W	K	LM	LM/W	Dimensions
75533	Reeve Connect 5ft	45W	6500	4000	89	L: 1565mm Proj: 43mm W: 74mm

COMMERCIAL BATTEN

REEVE 2

Quick installation, anti-corrosive LED battens

3YR
WARRANTY

CLASS 2

SMD

IP65
RATED

120°
BEAM

UP TO
4000
LUMENS

SLIM
PROFILE



- Opal & gloss white polycarbonate finish



Pre-wired cable



Cable gland entry

Code	Description	W	K	LM	LM/W	Dimensions
99816	Reeve 2 2ft	18W	6500	1650	92	L: 595mm Proj: 23mm W: 74mm
99817	Reeve 2 4ft	33W	6500	3300	100	L: 1220mm Proj: 23mm W: 74mm
73536	Reeve 2 5ft	40W	6500	4000	100	L: 1520mm Proj: 25mm W: 75mm

Order online www.saxbytrade.com



4K/5K/6K
CCT SWITCH



TRI-WATTAGE
SWITCH



EMERGENCY
AVAILABLE



5YR
WARRANTY

ALTUMPRO CCT

Robust, durable wattage selectable highbays

The AltumPRO Highbay range features a durable die-cast aluminum housing, built to withstand the toughest conditions with an IK08 rating. Equipped with high-performance LED chips. It offers 3 selectable wattage outputs easily adjustable with a switch and a maximum lumen output of up to 32,000 lumens at 160 lm/w. Each fitting includes a minor adjustment feature, enabling you to fine-tune settings between the three main wattages. Additionally, it has a tri-color switch with 4000K, 5000K, and 6000K options, delivering natural, bright light that enhances productivity and efficiency. The range is complemented by a comprehensive selection of accessories and a plug-and-play microwave sensor, making it the ultimate solution for all your commercial and industrial lighting needs.

ALTUMPRO CCT

Robust, durable wattage selectable highbays



UP TO
32000
LUMENS

160
LM/W




4000K

5000K

6000K

- Constructed from die cast aluminium alloy & polycarbonate



Wattage / CCT switch



Minor Adjustment box

Code	Description	W	K	LM	LM/W	Dimensions
111662	AltumPRO CCT	80W/120W/150W	4000/5000/6000	24000	160	H: 125mm Dia: 280mm
111663	AltumPRO CCT	120W/150W/200W	4000/5000/6000	32000	160	H: 125mm Dia: 280mm

Order online www.saxbytrade.com

ALTUMPRO CCT ACCESSORIES

Accessories for AltumPRO

NEW
OPTION



111664



111665



111666



111667



111668



120809



78774

Code	Description	Finish	Dimensions
111664	AltumPRO Accessory Aluminium Shade	Silver	Dia: 455mm Proj: 160mm
111665	AltumPRO Polycarbonate Shade	Clear prismatic	Dia: 414mm Proj: 153mm
111666	AltumPRO Polycarbonate Shade Base	Clear prismatic	Dia: 404mm Proj: 40mm
111667	AltumPRO Bracket	Black	H: 187.5mm W: 132mm L: 35mm
111668	AltumPRO Microwave Sensor	Clear	H: 45.95mm Dia: 50mm
120809	NEW Highbay Emergency Kit	Matt black	H: 91.5mm Dia: 82.5mm
78774	Microwave Sensor Remote	White plastic	L: 54mm W: 140mm H: 12mm

COMMERCIAL HIGHBAY

MICROWAVE SENSOR REMOTE

DETECTION AREA

Variable microwave sensitivity depending on height & required area of detection.

REMOTE DISTANCE

Toggle to set the remote distance of remote control and sensor.

DIM STAND-BY LEVEL

The minimum brightness the highbay remains at after movement is detected.

DAYLIGHT SENSOR

Allows selection of natural light level required before microwave detection activities.

HOLD TIME

Duration of time the highbay remains at after movement is detected.

RESET

Factory settings.

STAND-BY PERIOD

Duration of time the highbay remains at the dimmed brightness before turning off.

QUICK SETTING MODES

Pre-configured setting options available. Suitable for applications & mounting heights.

ON/OFF

Constant on/off mode with sensor disabled.

TEST 2S

Test mode on default parameters.

DIM+ & DIM-

Light level from 50-100% -2% change on each press.

LS BUTTON

Low Sensitive - decreases the motion sensitivity.

HS BUTTON

High Sensitive - decreases the motion sensitivity.





3K/4K/6.5K
CCT SWITCH



3 WATTAGES
AVAILABLE



IK08
RATED



3YR
WARRANTY

TITAN ANTI GLARE

Robust, durable LED highbays

Titan Anti-Glare LED Highbay delivers exceptional performance with up to 20,000 lumens of bright, high-quality light while reducing glare. Designed for versatility, it comes with both a durable bracket and an eyelet mounting ring as standard, making installation simple and secure. Built to withstand tough environments, it's IK08 impact resistant and IP65 weatherproof, ensuring long-lasting reliability in all environments. A convenient CCT switch lets you easily adjust the colour temperature between 3000K, 4000K & 6500K at the flick of a switch, providing the perfect lighting for any application.

NEW
PRODUCT

TITAN ANTI-GLARE

High performance, impact-resistant highbay range

 **3YR**
WARRANTY

 **CLASS 1**

 **SMD**

 **IP65**
RATED

 **IK08**
RATED

 **90°**
BEAM

UP TO
20000
LUMENS



118611



3000K



4000K



6500K

- Constructed from die cast aluminium alloy & polycarbonate
- Matt black & clear pc



Eyelet supplied



CCT switch

Code	Description	W	K	LM	LM/W	Dimensions
118611	NEW Titan Anti-Glare	100W	3000/4000/6500	10000	100	Proj: 92.3mm Dia: 235.2mm
118612	NEW Titan Anti-Glare	150W	3000/4000/6500	15000	100	Proj: 92.3mm Dia: 271.7mm
118613	NEW Titan Anti-Glare	200W	3000/4000/6500	20000	100	Proj: 92.3mm Dia: 308.3mm

Order online www.saxbytrade.com



MULTI WATTAGES
AVAILABLE



SUSPENSION
KIT



EMERGENCY
AVAILABLE



5YR
WARRANTY

APOLLO

Sleek, modern & energy-efficient lowbay

The Apollo range from Saxby Lighting is designed to meet the demands of modern commercial spaces with unmatched efficiency and adaptability. Apollo delivers up to an impressive 30000 lumens at 150 lumens per watt, ensuring bright and energy-efficient illumination. Its suspension kit allows for adjustable height, making it a perfect fit for various ceiling heights and configurations. For added convenience and versatility, a CCT and tri-wattage version is also available. Apollo is the go-to choice for reliable, high-performance lighting.

NEW
OPTION

APOLLO

Sleek, modern & energy-efficient lowbay

5YR
WARRANTY

CLASS 1

SMD

90°
BEAM

UP TO
21000
LUMENS

140
LM/W



Sensor option

- Microwave sensor remote: See page 101 for more details

Code	Description	W	K	LM	LM/W	Dimensions
107650	Apollo	100W	6000	14000	140	H: 48-1100mm W: 303mm L: 604mm
112538	Apollo	150W	6000	21000	140	H: 48-1100mm W: 303mm L: 604mm
113266	Apollo Microwave Sensor	-	-	-	-	H: 62mm W: 75mm L: 118mm
78774	Microwave Sensor Remote	-	-	-	-	L: 54mm W: 140mm H: 12mm
120809	NEW Highbay Emergency Kit	-	-	-	-	H: 91.5mm Dia: 82.5mm

APOLLO CCT

Sleek, modern & energy-efficient lowbay with selectable colour temperature and wattage

5YR
WARRANTY


CLASS 1

SMD

90°
BEAM

UP TO
30000
LUMENS

150
LM/W

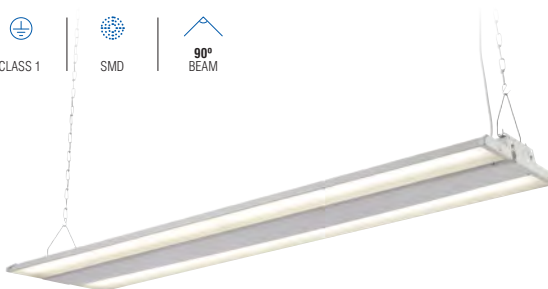


Wattage/CCT switch

- Microwave and Emergency accessories above can also be used on this product

Code	Description	W	K	LM	LM/W	Dimensions
121000	NEW Apollo CCT	100W/150W/200W	4000/5000/6000	16000/23800/30000	150	H: 48-1100mm W: 303mm L: 1204mm

Order online www.saxbytrade.com

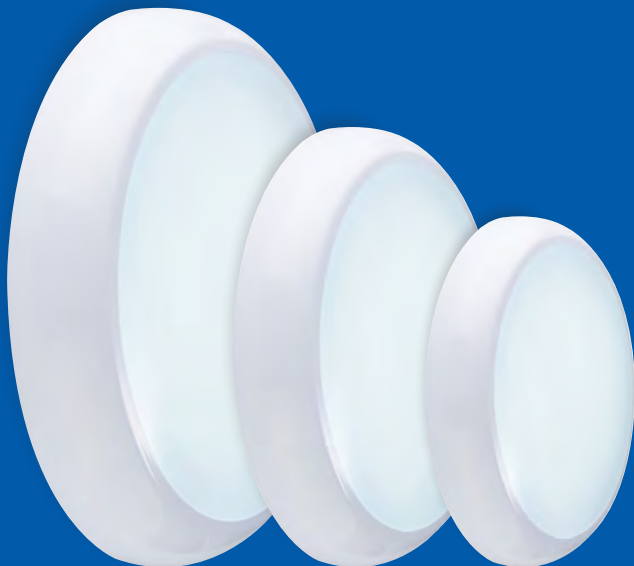

3K/4K/6K
CCT SWITCH



WATTAGE
SWITCH



FAST-FIT HINGED
GEAR TRAY



PUSH-FIT
TERMINALS

SAXBY HEROPRO

Saxby's signature all in one bulkhead

Saxby's signature bulkhead range Hero covers multiple wattage and temperature requirements in one unit. The range features the best-selling HeroPRO, as well as mini and XL versions and an Ultra fitting with enhanced features. The fast-fit hinged gear tray, and push-fit connector makes it perfect for efficient, hassle-free installation. The IP65, slim profile and IK10 rating further ensure it is robust enough for public spaces indoors and outdoors.





SAXBY HEROPRO CCT

Saxby's signature all in one bulkhead



UP TO
1800
LUMENS

HINGED
GEAR
TRAY



3000K

4000K

6000K



- Constructed and finish: opal polycarbonate and matt white textured
- Gloss white finish
- Complete with LED driver
- Proj: 74mm Dia: 316mm
- EM uses LiFePO4 battery



Selectable wattage




Fast fix connector

Code	Description	W	K	LM	LM/W
95539	Saxby HeroPRO	9W/14W/18W	3000/4000/6000	900/1400/1800	100
95540	Saxby HeroPRO Emergency	9W/14W/18W	3000/4000/6000	900/1400/1800	100
95541	Saxby HeroPRO Microwave	9W/14W/18W	3000/4000/6000	900/1400/1800	100
95542	Saxby HeroPRO Microwave Emergency	9W/14W/18W	3000/4000/6000	900/1400/1800	100
95543	Saxby HeroPRO Corridor	9W/14W/18W	3000/4000/6000	900/1400/1800	100
95544	Saxby HeroPRO Corridor Emergency	9W/14W/18W	3000/4000/6000	900/1400/1800	100
102454	Saxby HeroPRO Self Test EM Kit	-	-	-	-
101456	Saxby HeroPRO Microwave Sensor	-	-	-	-

COMMERCIAL BULKHEAD

SAXBY HEROPRO CCT BEZELS

Plain, eyelid and grill bezel options

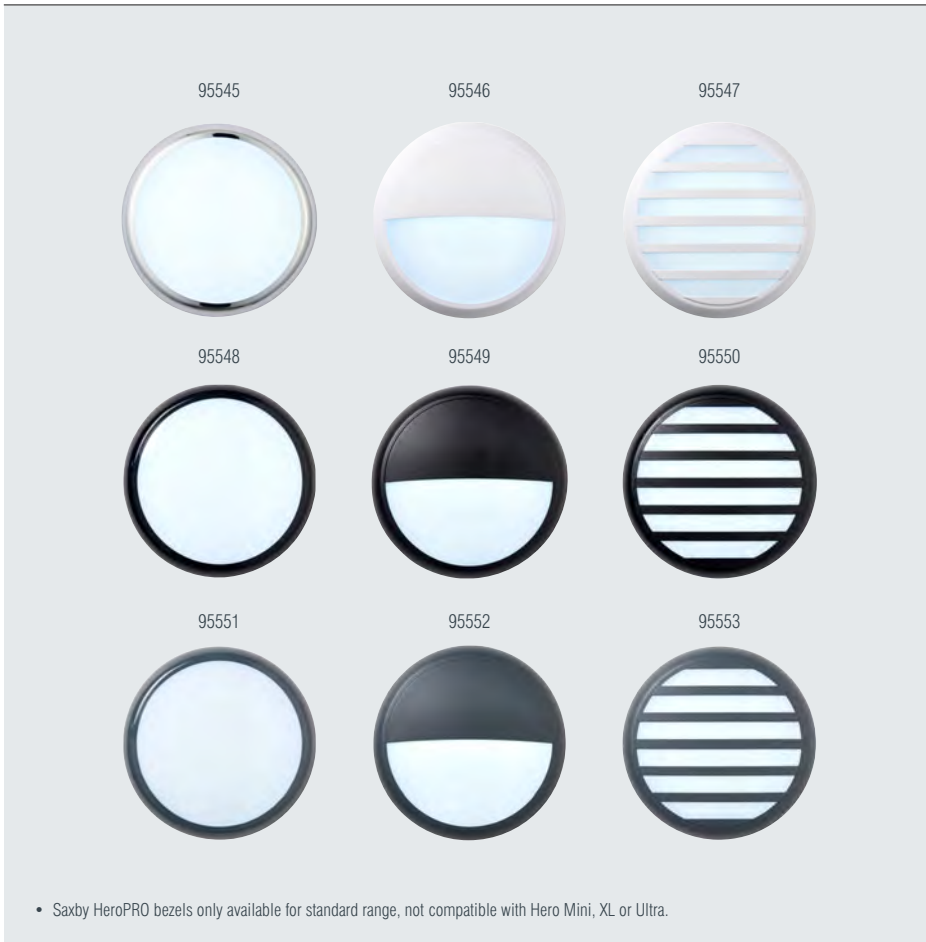

Code	Description	Finish	Dimensions
95545	Saxby HeroPRO Chrome Plain Bezel	Chrome effect polycarbonate	H: 48mm Dia: 316mm
95546	Saxby HeroPRO White Eyelid Bezel	Matt white abs plastic	H: 64mm Dia: 316mm
95547	Saxby HeroPRO White Grill Bezel	Matt white abs plastic	H: 65mm Dia: 317mm
95548	Saxby HeroPRO Black Plain Bezel	Gloss black abs plastic	H: 48mm Dia: 316mm
95549	Saxby HeroPRO Black Eyelid bezel	Matt black abs plastic	H: 64mm Dia: 316mm
95550	Saxby HeroPRO Black Grill Bezel	Matt black abs plastic	H: 65mm Dia: 317mm
95551	Saxby HeroPRO Anthracite Grey Plain Bezel	Gloss anthracite grey abs plastic	H: 48mm Dia: 316mm
95552	Saxby HeroPRO Anthracite Grey Eyelid Bezel	Matt anthracite grey abs plastic	H: 64mm Dia: 316mm
95553	Saxby HeroPRO Anthracite Grey Grill Bezel	Matt anthracite grey abs plastic	H: 65mm Dia: 317mm

SAXBY HEROPRO MINI

Saxby's signature all in one bulkhead


5YR
WARRANTY


CLASS 2


SMD


IP65
RATED


IK10
RATED


120°
BEAM

UP TO
1200
LUMENS

HINGED
GEAR
TRAY



- Constructed and finish: opal polycarbonate and matt white textured
- Gloss white finish
- Complete with LED driver
- EM uses LiFePO4 battery
- Proj: 74mm Dia: 251mm



Chrome bezel accessory



Fast fix connector

Code	Description	W	K	LM	LM/W
102730	Saxby HeroPRO Mini	6W/9W/12W	3000/4000/6000	600/900/1200	100
103935	Saxby HeroPRO Mini Emergency	6W/9W/12W	3000/4000/6000	600/900/1200	100
103936	Saxby HeroPRO Mini Microwave	6W/9W/12W	3000/4000/6000	600/900/1200	100
103937	Saxby HeroPRO Mini Microwave Emergency	6W/9W/12W	3000/4000/6000	600/900/1200	100
107144	Saxby HeroPRO Mini Bezel Chrome	-	-	-	-
102454	Saxby HeroPRO Self Test EM Kit	-	-	-	-
101456	Saxby HeroPRO Microwave Sensor	-	-	-	-

COMMERCIAL BULKHEAD

SAXBY HEROPRO XL

Saxby's signature all in one bulkhead



UP TO
2800
LUMENS

HINGED
GEAR
TRAY



3000K

4000K

6000K



- Constructed and finish: opal polycarbonate and matt white textured
- Gloss white finish
- Complete with LED driver
- EM uses LiFePO4 battery
- Proj: 85mm Dia: 400mm



Fast fix connector

Code	Description	W	K	LM	LM/W
102732	Saxby HeroPRO XL	20W/24W/28W	3000/4000/6000	2000/2400/2800	100
103938	Saxby HeroPRO XL Emergency	20W/24W/28W	3000/4000/6000	2000/2400/2800	100
103939	Saxby HeroPRO XL Microwave	20W/24W/28W	3000/4000/6000	2000/2400/2800	100
103940	Saxby HeroPRO XL Microwave Emergency	20W/24W/28W	3000/4000/6000	2000/2400/2800	100
102454	Saxby HeroPRO XL Self Test EM Kit	-	-	-	-
101456	Saxby HeroPRO XL Microwave Sensor	-	-	-	-
103943	Saxby HeroPRO XL Corridor Kit	-	-	-	-

FIVE COLOURS
THREE WATTAGES
ONE BULKHEAD



Saxby **HeroULTRA**

The latest addition to Saxby's signature range is available in Standard, Emergency and Microwave variants and features switchable CCT and wattages. Its slim, robust design is IP65 and IK10 rated, with four 20mm side conduit entries for flexible installation.



8W/12W/15W
WATTAGE SWITCH



2.7K/3K/4K/5K/6K
CCT SWITCH



HINGED
GEAR TRAY



CLICK ON
BEZEL

SAXBY HEROULTRA

Saxby's upgraded signature bulkhead




UP TO
1800
LUMENS

120
LM/W

CASAMBI
COMPATIBLE

DALI
COMPATIBLE

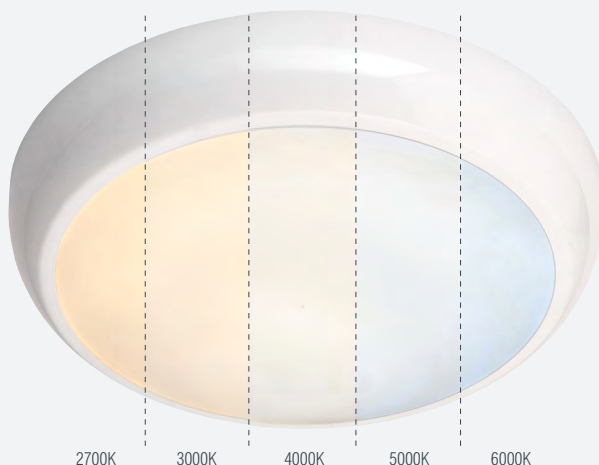

- Gloss white & opal polycarbonate finish
- Comes complete with white plain bezel
- 2700/3000/4000/5000/6000K
- EM uses LiFePO4 battery



Conduit knockout entry



Wattage/CCT switch

Code	Description	Finish	W	LM	LM/W	Dimensions
113960	Saxby HeroULTRA Standard	Matt white	8W/12W/15W	960/1440/1800	120	Proj: 66mm Dia: 305mm
113961	Saxby HeroULTRA Microwave	Matt white	8W/12W/15W	960/1440/1800	120	Proj: 66mm Dia: 305mm
113962	Saxby HeroULTRA Emergency	Matt white	8W/12W/15W	960/1440/1800	120	Proj: 66mm Dia: 305mm
113963	Saxby HeroULTRA Microwave Emergency	Matt white	8W/12W/15W	960/1440/1800	120	Proj: 66mm Dia: 305mm
113965	Saxby HeroULTRA Plain bezel	Chrome	-	-	-	H: 48mm Dia: 316mm
113966	Saxby HeroULTRA Plain bezel	Black	-	-	-	H: 48mm Dia: 316mm
113967	Saxby HeroULTRA Eyelid bezel	White	-	-	-	H: 64mm Dia: 316mm
113968	Saxby HeroULTRA Eyelid bezel	Black	-	-	-	H: 64mm Dia: 316mm
113964	ULTRA EM 2-in-1 Kit	Matt white	3W	180	60	H: 27mm W: 69mm L: 119mm
114573	ULTRA Sensor 2-in-1	White	-	-	-	H: 18mm W: 27mm L: 51mm

Order online www.saxbytrade.com

FORCAULTRA

Functional and sturdy utility bulkhead




UP TO
1800
LUMENS

120
LM/W

CASAMBI
COMPATIBLE

DALI
COMPATIBLE

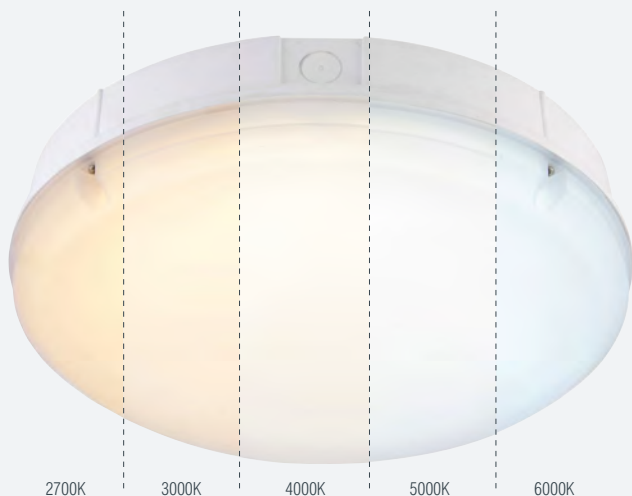

- Gloss white & opal polycarbonate finish
- Supplied without bezel
- 113964: 3 hour emergency
- 114573: 30-150° detection angle, 10lux to disable sensitivity, 50% to 100% adjustable range with a 5 sec - 10 min timer function, Max. 6m height. Stand by DIM level: 10%, 30%, Stand by period: 0s/10s/10min/Max
- 2700/3000/4000/5000/6000K



Hinged gear tray

Code	Description	W	LM	LM/W	Dimensions
77897	ForcaULTRA CCT	8W/12W/15W	960/1440/1800	120	Proj: 90mm Dia: 300mm
77898	ForcaULTRA CCT Microwave	8W/12W/15W	960/1440/1800	120	Proj: 90mm Dia: 300mm
77899	ForcaULTRA CCT Photocell	8W/12W/15W	960/1440/1800	120	Proj: 90mm Dia: 300mm
77901	ForcaULTRA CCT Emergency	8W/12W/15W	960/1440/1800	120	Proj: 90mm Dia: 300mm
77902	ForcaULTRA CCT Microwave Emergency	8W/12W/15W	960/1440/1800	120	Proj: 90mm Dia: 300mm
113964	ULTRA EM 2-in-1 Kit	3W	180	60	H: 27mm W: 69mm L: 119mm
114573	ULTRA Sensor 2-in-1	-	-	-	H: 18mm W: 27mm L: 51mm

COMMERCIAL BULKHEAD

FORCAULTRA BEZELS

Accessories for the ForcaULTRA range



77904



77910




77911



77913



78286 (pack of 4)



Anti-theft screw

- Constructed from polycarbonate

Code	Description	Finish	Dimensions
77904	ForcaULTRA White Plain Bezel	Gloss white polycarbonate	Proj: 60mm Dia: 340mm
77910	ForcaULTRA Black Plain Bezel	Matt black textured polycarbonate	Proj: 60mm Dia: 340mm
77911	ForcaULTRA Black Eyelid Bezel	Matt black textured polycarbonate	Proj: 83mm Dia: 340mm
77913	ForcaULTRA Chrome Plain Bezel	Chrome effect polycarbonate	Proj: 60mm Dia: 340mm
78286	ForcaULTRA Anti-Theft Screw Pack	Steel	-

CORE CCT

Budget friendly everyday bulkhead

5YR
WARRANTY

CLASS 2

SMD

IP65
RATED

IK08
RATED

120°
BEAM

UP TO
1500
LUMENS



3000K

4000K

6000K



- Constructed from polycarbonate
- Emergency maintained & non-maintained fitting



CCT switch



Wattage switch

Code	Description	W	K	LM	LM/W	Dimensions
110965	Core CCT Standard	8W/12W/15W	3000/4000/6000	800/1200/1500	100	Proj: 66mm Dia: 305mm
110966	Core CCT Microwave	8W/12W/15W	3000/4000/6000	800/1200/1500	100	Proj: 66mm Dia: 305mm
110967	Core CCT Emergency	8W/12W/15W	3000/4000/6000	800/1200/1500	100	Proj: 66mm Dia: 305mm
110968	Core CCT Emergency Microwave	8W/12W/15W	3000/4000/6000	800/1200/1500	100	Proj: 66mm Dia: 305mm
110969	Core CCT Bezel Black	-	-	-	-	Proj: 38mm Dia: 305mm
110970	Core CCT Bezel Chrome	-	-	-	-	Proj: 38mm Dia: 305mm

COMMERCIAL BULKHEAD

NEW
PRODUCT

BULKHEAD CONVERSION PLATE

Tri-wattage and CCT LED replacement tray for non-LED bulkheads

5YR
WARRANTY

CLASS 1

SMD

120°
BEAM

UP TO
2250
LUMENS

150
LM/W



- Proj: 30mm Dia: 250mm
- Can be used to retrofit old-style 2D pin fittings to LED



CCT switch



Wattage switch

Code	Description	W	K	LM	LM/W
121020	NEW Bulkhead Conversion Plate	8W/12W/15W	2700/3000/4000/5000/6000	1200/1800/2250	150
113964	ULTRA EM 2-in-1 Kit	3W	6000	180	60
114573	ULTRA Sensor 2-in-1	-	-	-	-

Order online www.saxbytrade.com

OLLO

Modern & tough circular flush light

NEW
PRODUCT

3YR
WARRANTY

CLASS 1

SMD

IP65
RATED

UP TO
3400
LUMENS



- Constructed from aluminium & polycarbonate
- 3000/4000/6500K

Code	Description	Finish	W	LM	LM/W	Dimensions
120961	NEW Ollø	White	23W/25W/27W/29W	2700/2910/3190/3400	117	Proj: 53mm Dia: 320mm
120962	NEW Ollø	Black	23W/25W/27W/29W	2520/2740/2990/3200	110	Proj: 53mm Dia: 320mm

COMMERCIAL FLUSH

PUCK CCT

Stylish, flush LED light integrated with CCT technology


3YR
WARRANTY


CLASS 2



SMD


IP44
RATED


120°
BEAM

UP TO
2400
LUMENS

0.2M
PRE WIRED
CABLE

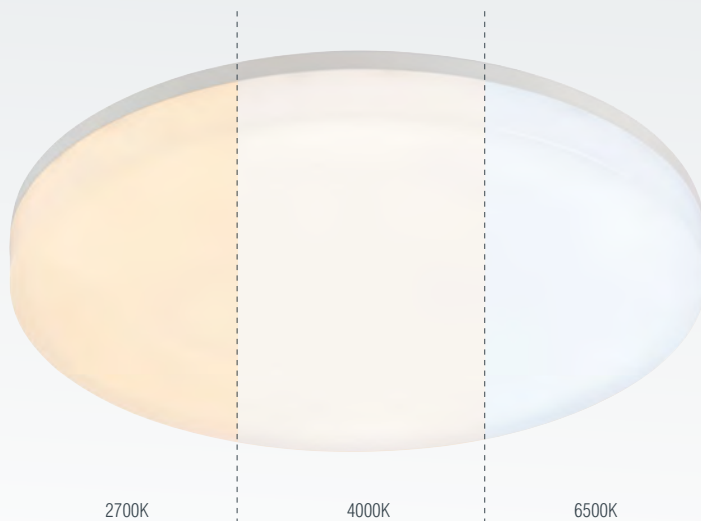

- Constructed from polycarbonate
- Complete with LED driver
- H: 53mm Dia: 330mm



Push fit bracket



Wattage/CCT switch

Code	Description	Finish	W	K	LM	LM/W
113807	Puck CCT	Opal & white pc	12W/18W/24W	2700/4000/6500	1200/1800/2400	100

Order online www.saxbytrade.com



WATTAGE
SWITCH



90°
TILT



350°
ROTATION



ANTI
GLARE

LUNARO

Saxby's versatile range of wattage-selectable track lighting

Lunaro is Saxby's new versatile track lighting range, available in both single-phase and 3-phase options to suit domestic and commercial applications alike. Designed for flexibility, Lunaro is fully adjustable and features selectable wattage for tailored performance across a range of settings. Available in matt black or white finishes, it offers a clean, modern lighting solution whether you need a simple single-circuit setup or more advanced multi-circuit control.

NEW
PRODUCT

LUNARO 3-PHASE

Saxby's versatile range of wattage-selectable track lighting



UP TO
3260
LUMENS

CASAMBI
COMPATIBLE

DALI
COMPATIBLE



- Constructed from die cast aluminium alloy
- 350° rotation and 90° tilt
- Wattage selectable: 12W/14W/16W/18W/20W/22W/24W/26W/28W/30W/32W
- 120334 & 120336 Lm:1160/1330/1500/1670/1870/2020/2400/2550/2700/2885/3240
- 120335 & 120337 Lm:1220/1390/1580/1750/1950/2110/2600/2770/2930/3150/3260
- Other beam angle lenses available on request
- Compatible with global track



Code	Description	Finish	K	Dimensions
120334	NEW Lunaro 3-Phase	Matt white	3000	H: 222.6mm W: 162.1mm Dia: 68mm
120335	NEW Lunaro 3-Phase	Matt white	4000	H: 222.6mm W: 162.1mm Dia: 68mm
120336	NEW Lunaro 3-Phase	Matt black	3000	H: 222.6mm W: 162.1mm Dia: 68mm
120337	NEW Lunaro 3-Phase	Matt black	4000	H: 222.6mm W: 162.1mm Dia: 68mm

Order online www.saxbytrade.com

LUNARO

Saxby's versatile range of wattage-selectable track lighting

NEW
PRODUCT

5YR
WARRANTY

CLASS 2

COB

38°
BEAM

ANTI
GLARE

UP TO
3150
LUMENS




- Constructed from die cast aluminium alloy
- 350° rotation and 90° tilt

Code	Description	Finish	W	K	LM	LM/W	Dimensions
119091	NEW Lunaro	Matt white	24W/26W/28W/30W	3000	2400/2550/2700/2885	96	H: 220.9mm W: 171mm D: 237.6mm
119092	NEW Lunaro	Matt white	24W/26W/28W/30W	4000	2600/2770/2930/3150	105	H: 220.9mm W: 171mm D: 237.6mm
119093	NEW Lunaro	Matt black	24W/26W/28W/30W	3000	2400/2550/2700/2885	96	H: 220.9mm W: 171mm D: 237.6mm
119094	NEW Lunaro	Matt black	24W/26W/28W/30W	4000	2600/2770/2930/3150	105	H: 220.9mm W: 171mm D: 237.6mm

COMMERCIAL TRACK

STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

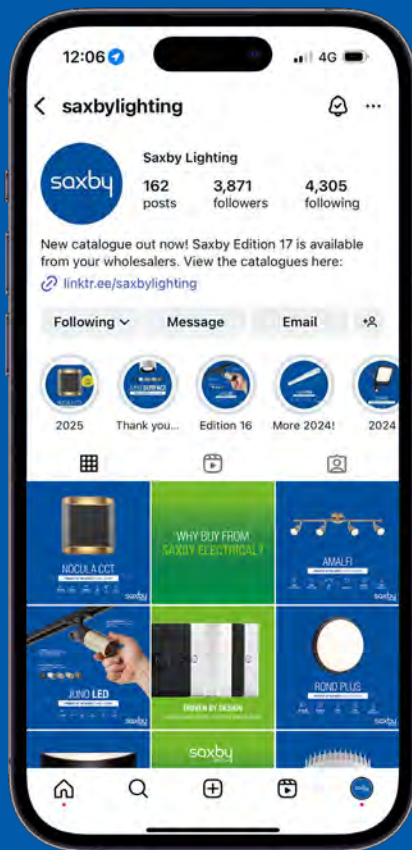

Follow us on Facebook,
X, Instagram and LinkedIn



COLT LED

Modern, stylish track heads with integrated driver



3YR
WARRANTY



CLASS 1



COB



38°
BEAM



3
SDCM

UP TO
4000
LUMENS





----- 160mm -----



----- 197mm -----



----- 200mm -----

- Constructed from die cast aluminium alloy & pmma plastic
- Unique sleek track fitting
- 350° rotation and 90° tilt



Track connector

Code	Description	Finish	W	K	LM	LM/W	Dimensions
101626	Colt LED Track Head	Matt white	15W	3000	1700	113	H: 160mm Dia: 54mm
101627	Colt LED Track Head	Matt white	15W	4000	1800	120	H: 160mm Dia: 54mm
101628	Colt LED Track Head	Matt black	15W	3000	1700	113	H: 160mm Dia: 54mm
101629	Colt LED Track Head	Matt black	15W	4000	1800	120	H: 160mm Dia: 54mm
101630	Colt LED Track Head	Matt white	23W	3000	2700	117	H: 197mm Dia: 69mm
101631	Colt LED Track Head	Matt white	23W	4000	2800	122	H: 197mm Dia: 69mm
101632	Colt LED Track Head	Matt black	23W	3000	2700	117	H: 197mm Dia: 69mm
101633	Colt LED Track Head	Matt black	23W	4000	2800	122	H: 197mm Dia: 69mm
101634	Colt LED Track Head	Matt white	34W	3000	3900	115	H: 200mm Dia: 79mm
101635	Colt LED Track Head	Matt white	34W	4000	4000	118	H: 200mm Dia: 79mm
101636	Colt LED Track Head	Matt black	34W	3000	3900	115	H: 200mm Dia: 79mm
101637	Colt LED Track Head	Matt black	34W	4000	4000	118	H: 200mm Dia: 79mm

COMMERCIAL TRACK

COLT CCT

Modern, stylish track heads with integrated driver


3YR
WARRANTY


CLASS 1


SMD


60°
BEAM

UP TO
950
LUMENS



- Constructed from die cast aluminium alloy & pmma plastic
- 350° rotation and 90° tilt




Track connector



CCT switch

Code	Description	Finish	W	K	LM	LM/W	Dimensions
108741	Colt LED CCT	Matt white	11.7W	2700/3000/4000/6000	950	81	H: 177mm Dia: 58mm
108742	Colt LED CCT	Matt black	11.7W	2700/3000/4000/6000	900	77	H: 177mm Dia: 58mm

Order online www.saxbytrade.com

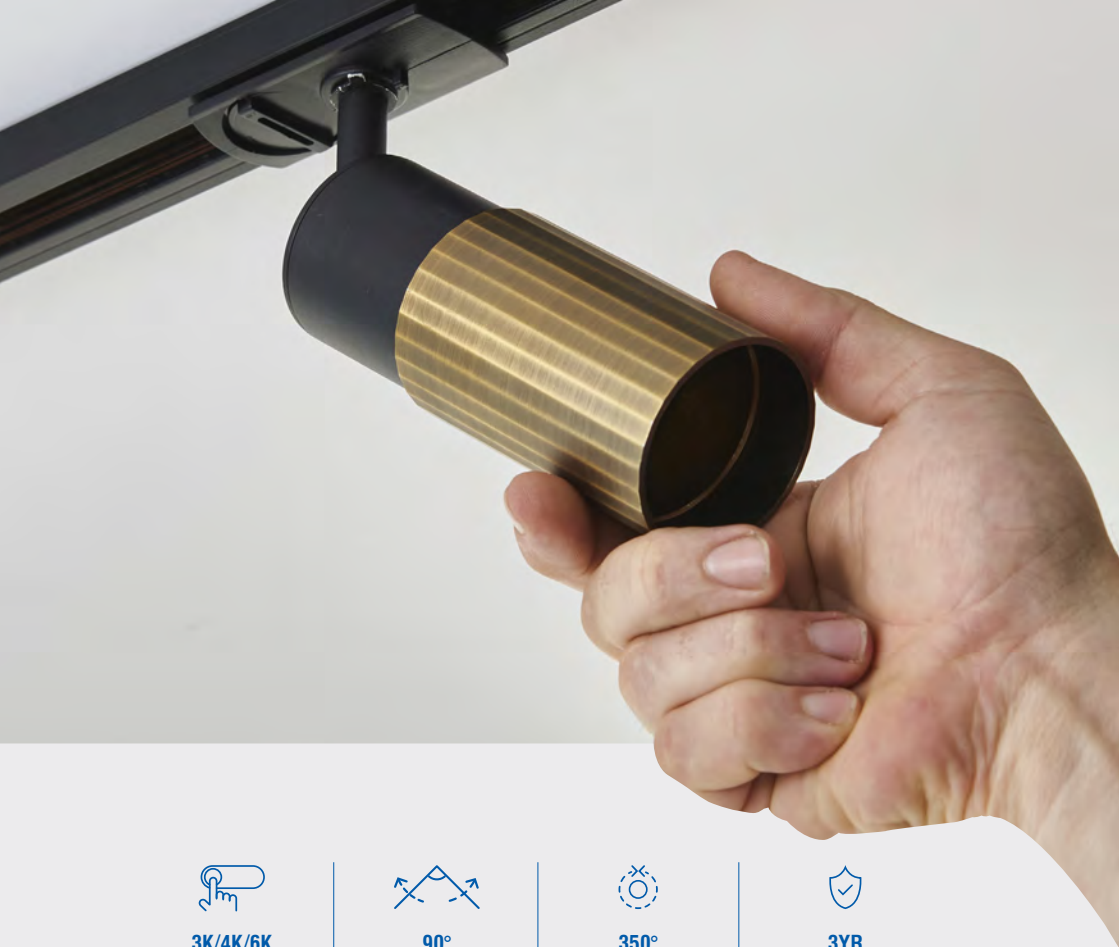

3K/4K/6K
CCT SWITCH



90°
TILT



350°
ROTATION



3YR
WARRANTY

JUNO

Unique track fitting with interchangeable exterior casings

Introducing Juno LED — Our dimmable track head is the ultimate fusion of style and functionality, elevate your lighting game like never before with its groundbreaking features that will leave you captivated. Our Juno Track Head boasts interchangeable metal sleeves that elegantly slide and lock onto the body, allowing you to completely transform its look within seconds. From sleek and modern to timeless and sophisticated, the possibilities are endless. Seamlessly switch between 3000K, 4000K, and 6000K to achieve the ideal lighting tone for your space. Crafted with meticulous attention to detail, the Juno Track Head combines cutting-edge technology with exquisite design. Its sleek and minimalist profile seamlessly integrates into any environment.



1000
LUMENS

Casing options

- Constructed from aluminium & pmma plastic
- Unique sleek track fitting

Add your casing

CCT switch

Track connector

Code	Description	Finish	W	K	LM	LM/W	Dimensions
120813	NEW Juno LED Track Head	Matt black	10W	3000/4000/6000	1000	100	Proj: 146.7mm L: 111.5mm W: 51.5mm
108736	Juno LED casing	Black	-	-	-	-	H: 85mm Dia: 52mm
108737	Juno LED casing	White	-	-	-	-	H: 85mm Dia: 52mm
108738	Juno LED casing	Rose gold	-	-	-	-	H: 85mm Dia: 52mm
108739	Juno LED casing	Champagne	-	-	-	-	H: 85mm Dia: 52mm
108740	Juno LED casing	Antique brass	-	-	-	-	H: 85mm Dia: 52mm

MONTE

Multi-directional GU10 track heads


2YR
WARRANTY


CLASS 1


DIMMABLE

LED
COMPATIBLE



- Constructed from steel & polycarbonate
- 330° rotation and 90° tilt

Code	Description	Finish	Lamp	Dimensions
42315	Monte Track Head	Gloss white & chrome plate	GU10 (required)	Proj: 143mm W: 57mm D: 85mm
71899	Monte Track Head	Matt black & chrome plate	GU10 (required)	Proj: 143mm W: 57mm D: 85mm

COMMERCIAL TRACK

CONOR


Multi-directional GU10 track heads



Code	Description	Finish	Lamp	Dimensions
3TH139W	Conor Track Head	Gloss white	GU10 (required)	Proj: 128mm W: 37mm D: 90mm
78650	Conor Track Head	Matt black	GU10 (required)	Proj: 128mm W: 37mm D: 90mm

AREZZO

Multi-directional GU10 track heads

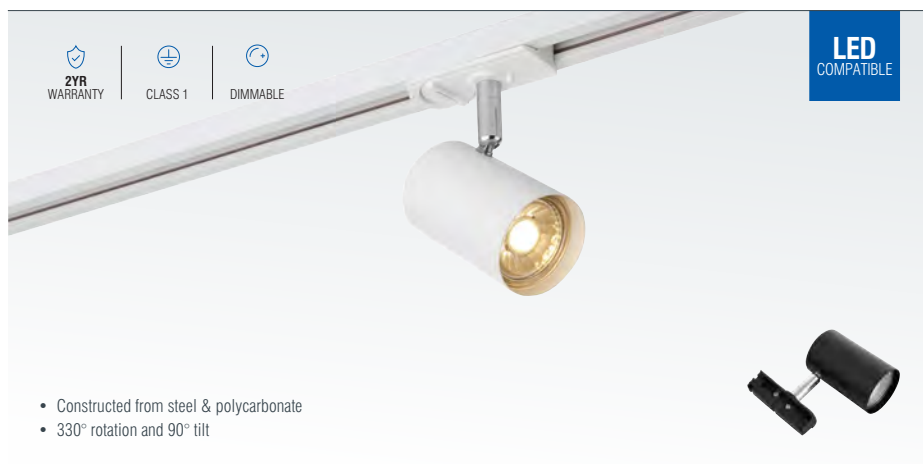

Code	Description	Finish	Lamp	Dimensions
103847	Arezzo Track Head	Matt white	GU10 (Required)	Proj: 115mm L: 105mm W: 53mm
103848	Arezzo Track Head	Matt black	GU10 (Required)	Proj: 115mm L: 105mm W: 53mm

Order online www.saxbytrade.com

BULLETT

Multi-directional GU10 track heads & kit options


2YR
WARRANTY


CLASS 1


DIMMABLE

LED
COMPATIBLE



- Constructed from steel & ABS plastic
- Kit includes: 3 heads, 1 x 1m track, 1 live end and 1 dead end
- 330° rotation and 90° tilt



Code	Description	Finish	Lamp	Dimensions
48024	Bullett Kit	Gloss white	GU10 (required)	L: 1000mm Proj: 140mm W: 56mm
78649	Bullett Kit	Matt black	GU10 (required)	L: 1000mm Proj: 140mm W: 56mm
3TH113W	Bullett Single Head	Gloss white	GU10 (required)	H: 98mm W: 56mm Proj: 140mm
71886	Bullett Single Head	Matt black	GU10 (required)	H: 98mm W: 56mm Proj: 140mm

COMMERCIAL TRACK

TRACK

Additional track in a variety of lengths



- Constructed from aluminium alloy & polycarbonate
- Includes 1 x live end & 1 x dead end

Code	Description	Finish	Dimensions
78654	Track 1m	White	L: 1000mm H: 17mm W: 35mm
78657	Track 2m	White	L: 2000mm H: 17mm W: 35mm
78660	Track 3m	White	L: 3000mm H: 17mm W: 35mm
78655	Track 1m	Black	L: 1000mm H: 17mm W: 35mm
78658	Track 2m	Black	L: 2000mm H: 17mm W: 35mm
78661	Track 3m	Black	L: 3000mm H: 17mm W: 35mm

TRACK ACCESSORIES

Connectors, adaptors and suspension kits



White	Black	Steel	Description	Dimensions
3TRAWI	71889	-	Track Central Connector	L: 180mm H: 17mm W: 35mm
75538	71896	-	Track Pendant Adaptor	L: 42mm H: 40mm W: 35mm
49145	71892	-	Track Dead End	L: 15mm H: 17mm W: 35mm
75535	71893	-	Track Flexible Connector	L: 300mm H: 17mm W: 35mm
-	-	81022	Track Suspension Kit Stainless Steel 3m	L: 3000mm Dia: 8mm

TRACK ACCESSORIES

Connectors, adaptors and suspension kits



71894



71895



71888



71890



71891

White	Black	Description	Dimensions
75537	71895	Track X Connector	L: 182mm H: 17mm W: 182mm
3TRAWP	71888	Track Live End	L: 107mm H: 17mm W: 35mm
3TRAWIS	71890	Track Internal Connector	L: 79mm H: 17mm W: 35mm
3TRAWL	71891	Track L Connector	L: 107mm H: 17mm W: 107mm
75536	71894	Track T Connector	L: 180mm H: 17mm W: 107mm

Order online www.saxbytrade.com

DANGO

Surface mounted downlight


2YR
WARRANTY


CLASS 1


DIMMABLE


IP65
RATED

LED
COMPATIBLE



- Constructed from aluminium & glass

Code	Description	Finish	Lamp	Dimensions
110972	Dango	Matt white	GU10 (required)	H: 111mm Dia: 63mm
110973	Dango	Matt black	GU10 (required)	H: 111mm Dia: 63mm

COMMERCIAL SURFACE DOWNLIGHT

JUNO SURFACE

Surface mounted LED downlight


3YR
WARRANTY


CLASS 1


COB


90
CRI


3
SDCM

1000
LUMENS

Casing options



- Constructed from aluminium & pmma
- Sand black & clear pmma



Quick fit connector



CCT switch

Code	Description	Finish	W	K	LM	LM/W	Dimensions
114568	Juno Surface	Black	10W	3000/4000/6000	1000	100	H: 86.5mm Dia: 51.5mm
108736	Juno LED Casing	Black	-	-	-	-	H: 85mm Dia: 52mm
108737	Juno LED Casing	White	-	-	-	-	H: 85mm Dia: 52mm
108738	Juno LED Casing	Rose gold	-	-	-	-	H: 85mm Dia: 52mm
108739	Juno LED Casing	Champagne	-	-	-	-	H: 85mm Dia: 52mm
108740	Juno LED Casing	Antique brass	-	-	-	-	H: 85mm Dia: 52mm



INTERIOR

Simple, stylish and modern, our interior lighting range covers all bases. We offer a range of spotlights, bars and wall lights. The minimalist design and choice of finishes mean that our products will fit in with any home décor.

SPOTLIGHT	138
WALL	145

AMALFI 1LT

Simple interior spotlights with a range of options and finishes


2YR
WARRANTY


CLASS 1


DIMMABLE

LED
COMPATIBLE



- Constructed from steel

Code	Description	Finish	Lamp	Dimensions	Tilt	Rotation
101328	Amalfi 1lt Plate	Matt black	GU10 (required)	Proj: 125mm Dia: 80mm	90°	350°
43281	Amalfi 1lt Plate	Gloss white	GU10 (required)	Proj: 125mm Dia: 80mm	90°	350°
62521013	Amalfi 1lt Plate	Satin nickel	GU10 (required)	Proj: 125mm Dia: 80mm	90°	350°
43277	Amalfi 1lt Plate	Chrome plate	GU10 (required)	Proj: 125mm Dia: 80mm	90°	350°
60998	Amalfi 1lt Plate	Antique brass	GU10 (required)	Proj: 125mm Dia: 80mm	90°	350°

INTERIOR SPOTLIGHT

AMALFI 2LT BAR

Simple interior spotlights with a range of options and finishes


2YR
WARRANTY


CLASS 1


DIMMABLE

LED
COMPATIBLE



- Constructed from steel

Code	Description	Finish	Lamp	Dimensions	Tilt	Rotation
101329	Amalfi 2lt Bar	Matt black	GU10 (required)	Proj: 155mm L: 255mm W: 90mm	90°	350°
43282	Amalfi 2lt Bar	Gloss white	GU10 (required)	Proj: 155mm L: 255mm W: 90mm	90°	350°
62521313	Amalfi 2lt Bar	Satin nickel	GU10 (required)	Proj: 155mm L: 255mm W: 90mm	90°	350°
43278	Amalfi 2lt Bar	Chrome plate	GU10 (required)	Proj: 155mm L: 255mm W: 90mm	90°	350°
60999	Amalfi 2lt Bar	Antique brass	GU10 (required)	Proj: 155mm L: 255mm W: 90mm	90°	350°

Order online www.saxbytrade.com

AMALFI 3LT ROUND

Simple interior spotlights with a range of options and finishes

**2YR**
WARRANTY

CLASS 1

DIMMABLE

LED
COMPATIBLE



- Constructed from steel

Code	Description	Finish	Lamp	Dimensions	Tilt	Rotation
101330	Amalfi 3lt Round	Matt black	GU10 (required)	Proj: 125mm Dia: 190mm	90°	350°
43283	Amalfi 3lt Round	Gloss white	GU10 (required)	Proj: 125mm Dia: 190mm	90°	350°
62523413	Amalfi 3lt Round	Satin nickel	GU10 (required)	Proj: 125mm Dia: 190mm	90°	350°
43279	Amalfi 3lt Round	Chrome plate	GU10 (required)	Proj: 125mm Dia: 190mm	90°	350°
60997	Amalfi 3lt Round	Antique brass	GU10 (required)	Proj: 125mm Dia: 190mm	90°	350°

INTERIOR SPOTLIGHT

AMALFI 4LT BAR

Simple interior spotlights with a range of options and finishes


2YR
WARRANTY


CLASS 1


DIMMABLE

LED
COMPATIBLE



- Constructed from steel

Code	Description	Finish	Lamp	Dimensions	Tilt	Rotation
101331	Amalfi 4lt Bar	Matt black	GU10 (required)	Proj: 155mm L: 595mm W: 90mm	90°	350°
60993	Amalfi 4lt Bar	Gloss white	GU10 (required)	Proj: 155mm L: 595mm W: 90mm	90°	350°
60995	Amalfi 4lt Bar	Satin nickel	GU10 (required)	Proj: 155mm L: 595mm W: 90mm	90°	350°
60991	Amalfi 4lt Bar	Chrome plate	GU10 (required)	Proj: 155mm L: 595mm W: 90mm	90°	350°
60992	Amalfi 4lt Bar	Antique brass	GU10 (required)	Proj: 155mm L: 595mm W: 90mm	90°	350°

Order online www.saxbytrade.com

AMALFI 6LT BAR

Simple interior spotlights with a range of options and finishes



Code	Description	Finish	Lamp	Dimensions	Tilt	Rotation
101332	Amalfi 6lt Bar	Matt black	GU10 (required)	Proj: 155mm L: 955mm W: 90mm	90°	350°
61002	Amalfi 6lt Bar	Gloss white	GU10 (required)	Proj: 155mm L: 955mm W: 90mm	90°	350°
61003	Amalfi 6lt Bar	Satin nickel	GU10 (required)	Proj: 155mm L: 955mm W: 90mm	90°	350°
61000	Amalfi 6lt Bar	Chrome plate	GU10 (required)	Proj: 155mm L: 955mm W: 90mm	90°	350°
61001	Amalfi 6lt Bar	Antique brass	GU10 (required)	Proj: 155mm L: 955mm W: 90mm	90°	350°

INTERIOR SPOTLIGHT



LED
COMPATIBLE



- Constructed from steel



Code	Description	Finish	Lamp	Dimensions	Tilt	Rotation
101333	Arezzo 1lt Plate	Matt Black	GU10 (required)	Proj: 150mm Dia: 120mm	90°	350°
101334	Arezzo 3lt Round	Matt Black	GU10 (required)	Proj: 150mm Dia: 240mm	90°	350°
101335	Arezzo 4lt Bar	Matt Black	GU10 (required)	Proj: 165mm L: 712mm W: 85mm	90°	350°
73684	Arezzo 1lt Plate	Matt white & chrome plate	GU10 (required)	Proj: 150mm Dia: 120mm	90°	350°
73685	Arezzo 3lt Round	Matt white & chrome plate	GU10 (required)	Proj: 150mm Dia: 240mm	90°	350°
73686	Arezzo 4lt Bar	Matt white & chrome plate	GU10 (required)	Proj: 165mm L: 712mm W: 85mm	90°	350°
73687	Arezzo 1lt Plate	Satin chrome & chrome plate	GU10 (required)	Proj: 150mm Dia: 120mm	90°	350°
73688	Arezzo 3lt Round	Satin chrome & chrome plate	GU10 (required)	Proj: 150mm Dia: 240mm	90°	350°
73689	Arezzo 4lt Bar	Satin chrome & chrome plate	GU10 (required)	Proj: 165mm L: 712mm W: 85mm	90°	350°

PALERMO

Simple and stylish spotlight range


2YR
WARRANTY


CLASS 1


DIMMABLE

LED
COMPATIBLE



- Constructed from steel
- Brushed chrome & chrome plate finish

Code	Description	Lamp	Dimensions	Tilt	Rotation
G5503177	Palermo 4lt Bar	GU10 (required)	Proj: 140mm L: 800mm W: 90mm	90°	350°

INTERIOR SPOTLIGHT

SHALE

Contemporary up and down wall light


3YR
WARRANTY


CLASS 1


SMD


120°
BEAM

250
LUMENS



- Constructed from aluminium alloy & frosted glass



CCT switch

Code	Description	Finish	W	K	LM	LM/W	Dimensions
46395	Shale 1lt Wall CCT	Brushed silver	9W	3500/5000	250	28	Proj: 65mm H: 80mm W: 350mm

Order online www.saxbytrade.com

LUMOS

Fully adjustable range of reading lights

NEW
PRODUCT

3YR
WARRANTY

CLASS 1

SMD

USB A+C
PORT

153
LUMENS



- Constructed from aluminium & steel
- Proj: 63mm H: 180mm W: 69mm
- Cut out: 170 x 57mm

Code	Description	Finish	W	K	LM	LM/W	Tilt	Rotation
120963	NEW Lumos	Stainless steel	3W	3000	153	51	90°	350°
120964	NEW Lumos	White	3W	3000	153	51	90°	350°
120965	NEW Lumos	Black	3W	3000	153	51	90°	350°

INTERIOR WALL

NEW
PRODUCT

LUMOS MINI

Fully adjustable range of reading lights


3YR
WARRANTY


CLASS 1


DIMMABLE


SMD


USB C
PORT

145
LUMENS



- Constructed from aluminium & steel
- Proj: 64mm H: 80mm W: 80mm
- Press & hold the on/off switch to dim




Code	Description	Finish	W	K	LM	LM/W	Tilt	Rotation
120966 NEW	Lumos Mini	Stainless steel	3W	3000	145	48	90°	350°
120967 NEW	Lumos Mini	White	3W	3000	145	48	90°	350°
120968 NEW	Lumos Mini	Black	3W	3000	145	48	90°	350°

Order online www.saxbytrade.com

MAKING THE MOST OF

SAXBYTRADE.COM

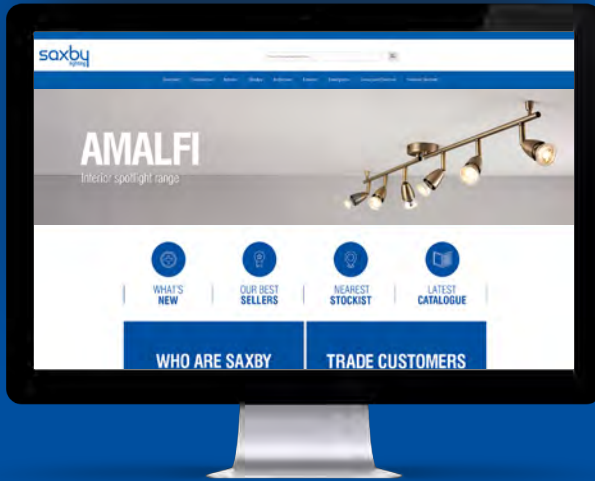

1400+
PRODUCTS



NO MINIMUM
ORDER VALUE



NEXT DAY DELIVERY
FROM STOCK



DELIVER DIRECT
TO SITE



ONLINE IMAGE
& DATA LIBRARY



NEW STOCK
ARRIVING DAILY



HUGE STOCK
HOLDING



EXPERT
SUPPORT TEAM



TECHNICAL SPEC
ACCESS



BRANCH
LOCATOR



ETHICAL &
QUALITY ASSURED



30 YEAR
EXPERIENCE

MADISON

Stylish and flexible LED reading light


3YR
WARRANTY


CLASS 1


SMD


120°
BEAM


TOGGLE
SWITCH

65
LUMENS



- Constructed from steel

Code	Description	Finish	W	K	LM	LM/W	Dimensions
50606	Madison 1lt Wall	Brushed chrome	1W	3000	65	65	Proj: 181mm H: 250mm W: 45mm

Order online www.saxbytrade.com



**PLASTER
IN WALL**



**REPLACEABLE
MODULE**



**PAINT
OVER**



**3YR
WARRANTY**

ZEKE

Low level, trimless plaster-in lighting

The Zeke is a trimless plaster-in wall light available in two sizes. Designed for use as a feature light, the subtly curved rear wall of the recess picks up the light evenly along the length of the fitting. When installed, the bond between luminaire and wall is completely trimless and seamless. This allows for an invisible interface between the fitting and the wall surface, so the end result looks as though its shape has been cast directly into the wall rather than added retrospectively.



**PAINT
TO MATCH
DECOR**







92312



92313



- Removable/replaceable LED module
- Suitable for painting with standard emulsion paint



Code	Description	W	K	LM	LM/W	Dimensions
92312	Zeke Square	1.6W	3000	64	40	Sq: 101mm Proj: 49mm
92313	Zeke Rectangle	1.6W	3000	79	49	H: 244mm W: 52mm Proj: 107mm

TOKO

Simple, curved & unglazed wall lights


3YR
WARRANTY


CLASS 2


LED
HI POWER

186
LUMENS

PAINT
TO MATCH
DECOR



• White plaster finish

61638

Code	Description	W	K	LM	LM/W	Dimensions
61639	Toko 1lt 200mm Wall	3W	3000	186	62	Proj: 85mm H: 120mm W: 200mm
61638	Toko 1lt 300mm Wall	3W	3000	186	62	Proj: 95mm H: 140mm W: 300mm

INTERIOR WALL

MINI CRESCENT

Simple, curved & unglazed wall light


2YR
WARRANTY


CLASS 2


DIMMABLE

PAINT
TO MATCH
DECOR



- White plaster finish

Code	Description	Lamp	Dimensions
10401	Mini Crescent 1lt Wall	E27 GLS (required)	Proj: 163mm H: 120mm W: 398mm

Order online www.saxbytrade.com

CRESCENT

Simple, curved & unglazed wall light


3YR
WARRANTY


CLASS 2


LED
HI POWER

PAINT
TO MATCH
DECOR



- White plaster finish

Code	Description	W	K	LM	LM/W	Dimensions
61636	Crescent 2lt Wall	2 x 2.8W	3000	271	48	Proj: 50mm H: 160mm W: 100mm

INTERIOR WALL

BOX

Simple box design with a contemporary feel


2YR
WARRANTY


CLASS 2


DIMMABLE

PAINT
TO MATCH
DECOR



- Constructed from white plaster & frosted glass

Code	Description	Lamp	Dimensions
10400	Box 2lt Wall	2 x G9 (required)	Proj: 78mm H: 75mm W: 353mm

Order online www.saxbytrade.com

CLARUS

White plaster wall light in a half-spherical shape

NEW
PRODUCT


2YR
WARRANTY


CLASS 1


DIMMABLE

PAINT
TO MATCH
DECOR



- White plaster finish

Code	Description	Lamp	Dimensions
119103	NEW Clarus 1lt	G9 (required)	Proj: 135mm H: 125mm W: 152mm

INTERIOR WALL

NEW
PRODUCT

VISUS

White plaster wall light in a curved rectangular shape

2YR
WARRANTY

CLASS 2

DIMMABLE

PAINT
TO MATCH
DECOR



- White plaster finish

Code	Description	Lamp	Dimensions
119104	NEW Visus 1lt	G9 (required)	Proj: 98mm H: 80mm W: 160mm

Order online www.saxbytrade.com



DISPLAY

Our display section has a range of versatile lighting solutions that can be used in both commercial and domestic properties. The collection has everything from under cabinet/shelf lighting, to LED tapes that can be used in the kitchen or entertainment rooms. The adaptability of these products allows you to produce bespoke lighting for a variety of applications.

CABINET	160
TAPE KITS	164
ORION	168
ORION 48V	172
Single Colour (SMD) IP20	172
Single Colour (COB) IP20	174
Single Colour (SMD) IP67	176
Single Colour (COB) IP67	176
RGBW (SMD) IP20	178
RGBW (SMD) IP67	180
ORION 24V	182
Single Colour (COB) IP20	182
Single Colour (FLEX) IP20	184
Single Colour (SMD) IP65	186
Single Colour (COB) IP67	188
RGBW (SMD) IP20	190
RGBW (COB) IP20	192
RGB IP20	194
ACCESSORIES	196
EXTRUSION	198

HERA CCT

Round LED under cabinet light


2YR
WARRANTY


CLASS 2


SMD


120°
BEAM

200
LUMENS

MAINS
TECHNOLOGY

Sold individually



- Constructed from steel & frosted polycarbonate
- 2.5W LED module (SMD) CCT
- 1m cable included
- Mains technology - no driver
- Can be recessed and surface mounted
- Cut hole Dia: 54mm



CCT Switch

Code	Description	Finish	K	LM	LM/W	Dimensions
103030	Hera CCT	Matt black	3000/4000/6500	200	80	Proj: 20mm Dia: 69mm
90126	Hera CCT	Brushed chrome	3000/4000/6500	200	80	Proj: 20mm Dia: 69mm

DISPLAY CABINET

NYX CCT

Triangular LED under cabinet light

 **2YR**
WARRANTY

 **CLASS 2**

 **SMD**

 **120°**
BEAM

200
LUMENS

MAINS
TECHNOLOGY



- Constructed from steel & frosted polycarbonate
- 2.5W LED module (SMD) CCT
- 1m cable included
- Mains technology - no driver
- Can be recessed and surface mounted
- Cut hole Dia: 54mm



CCT Switch

Code	Description	Finish	K	LM	LM/W	Dimensions
103031	Nyx CCT	Matt black	3000/4000/6500	200	80	Proj: 38mm L: 125mm W: 125mm
90127	Nyx CCT	Brushed chrome	3000/4000/6500	200	80	Proj: 38mm L: 125mm W: 125mm

Order online www.saxbytrade.com

SLEEK CCT

Linkable strip lighting in a choice of lengths



**3YR**
WARRANTY

CLASS 2

SMD

**ROCKER**
SWITCH

UP TO
1300
LUMENS

LINKABLE
WITH
ACCESSORY

3
SIZES

- Constructed from polycarbonate
- LED module (SMD) CCT
- Memory function
- Up to 8 can be connected together



91341 - Not included

69500 - Not included

Code	Description	Finish	K	LM	LM/W	Dimensions
75922	Sleek CCT 300mm 5W	Gloss white	3000/4000/5000	500	100	Proj: 38mm L: 305mm W: 23mm
75923	Sleek CCT 500mm 8W	Gloss white	3000/4000/5000	800	100	Proj: 38mm L: 505mm W: 23mm
75924	Sleek CCT 900mm 13W	Gloss white	3000/4000/5000	1300	100	Proj: 38mm L: 905mm W: 23mm
69500	Sleek CCT Link Lead	White PVC plastic	-	-	-	L: 440mm
91341	Sleek CCT Power Lead	White PVC plastic	-	-	-	L: 1060mm

DISPLAY CABINET



ORIONPRO IP20 KIT

Saxby's signature LED tape range


3YR
WARRANTY


CLASS 2


COB


DIMMABLE


120°
BEAM

UP TO
1900
LUMENS



- White plastic
- Constructed from polymer film



3000K



4000K

Code	Description	K	LM	LM/W	Dimensions
111673	OrionPRO IP20 5W/M 5M Kit	3000	1710	90	Proj: 1.3mm W: 8mm L: 5000mm
111674	OrionPRO IP20 5W/M 5M Kit	4000	1900	100	Proj: 1.3mm W: 8mm L: 5000mm

DISPLAY TAPE

FLEXLINE RGB KIT

RGB flexible LED strip lighting kit



2YR
WARRANTY



CLASS 3



RGB
SMD



DIMMABLE



120°
BEAM



REMOTE
CONTROL

RGB
REMOTE

5M
ROLL



- Constructed from white polymer film
- Cut to required length

Kit contents: 1 x in-line 24W driver with UK 3 pin plug (0.5 mains & 1.5m LV), 1 x 5000mm RGB strip, 1 x remote control, 1 x receiver



Code	Description	W	Dimensions
73667	Flexline 5m Kit RGB	24W	L: 5000mm W: 10mm Proj: 2.5mm

Order online www.saxbytrade.com

FLEXLINE CCT KIT

Flexible LED strip lighting kit


2YR
WARRANTY


CLASS 3


SMD


DIMMABLE


120°
BEAM


REMOTE
CONTROL

2100
LUMENS

CCT
TECHNOLOGY

5M
ROLL



- Constructed from white polymer film
- 24W LED tape module (SMD) CCT
- Cut to required length

Kit contents: 1 x in-line 24W driver with UK 3 pin plug (0.5 mains & 1.5m LV), 1 x 5000mm, 1 x remote control, 1 x receiver



Full colour control from warm white to daylight white

Code	Description	K	LM	LM/W	Dimensions
73666	Flexline 5m Kit CCT 24W	3000/4000/6000	2100	88	L: 5000mm W: 10mm Proj: 2.5mm

DISPLAY TAPE

FLEXLINE KIT

Flexible LED strip lighting kit


2YR
WARRANTY


CLASS 2


SMD


120°
BEAM

UP TO
1100
LUMENS

5M
ROLL



- Constructed from white polymer film
- 12W LED module (SMD)
- Cut to required length

Kit includes: 1 x in-line driver with UK 3 pin plug & 0.5m mains cable,
1 x 1.5m extension cable, 1 x 5m strip with 150 SMD 3528

Code	Description	K	LM	LM/W	Dimensions
52305	Flexline 5m Kit 12W	3000	1000	83	L: 5000mm W: 8mm Proj: 2.5mm
52306	Flexline 5m Kit 12W	6500	1100	92	L: 5000mm W: 8mm Proj: 2mm

Order online www.saxbytrade.com



**CUT TO
LENGTH**



**FLEXIBLE
DESIGN**

3M

**3M
ADHESIVE TAPE**



**LOW
PROFILE**

ORION

Saxby's signature LED tape range

OrionLED is Saxby's ever-growing signature tape range, offering a wide variety of options including IP20, IP65, IP67, Flexible 'S' shape, COB, RGB, and RGBW reels. Available in 24V or 48V, with power options from low to high, the range also includes warm and cool white options, various LEDs per metre, and 5m to 30m reel lengths. A 3M self-adhesive backing ensures quick installation, and an extensive range of accessories is available to complete any setup.

WELCOME TO ORION

SAXBY'S SIGNATURE LED TAPE RANGE

GETTING STARTED

OrionLED from Saxby includes a wide range of options to suit a variety of applications, making it the ideal choice for domestic, commercial, or retail installations.

It is essential to identify the right product to achieve the desired effect, as well as ensuring suitability for the installation environment, so we have put together some key points to support you in selecting the right products for your customer or project.

Orion20 and Orion65 are available in a range of colour temperatures and brightness, with the number in their name relating to their IP rating, allowing you to select the correct level of water protection.

OrionPRO, OrionFLEX AND OrionRGB are all offered at IP20 for indoor use with various features and benefits. OrionRGBW is available in different voltages and IP ratings, whilst OrionPro Neon Flex is fully IP67 rated.


To achieve the desired brightness Orion is available in standard (60 LEDs per metre) and high (120 LEDs per metre) using highly efficient SMD LED (5050 or 2835) and COB LED with very high CRI.

All products are covered by a 3 year warranty (2 years standard + 1 year extension).

WHY CHOOSE ORION FROM SAXBY?



The range is supported by a comprehensive collection of control components including drivers, controllers, and accessories. An extensive series of aluminium extrusions are offered in the Rigel/RigelSLIM range on pages 198-201.

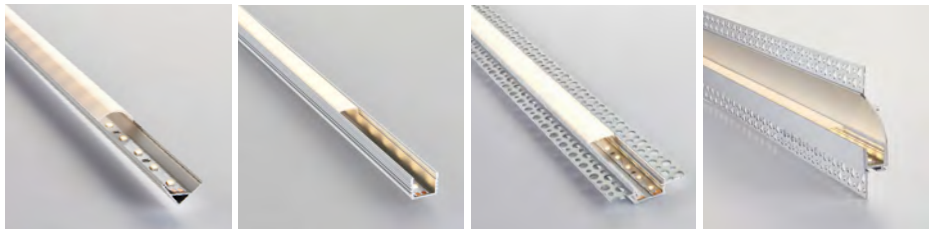

SELECTING THE RIGHT PRODUCT

The following two pages have been created to support wholesalers and electricians in making the right product selection from Saxby's Orion range. Point of sale and additional literature is also available to Saxby stockists, please speak to your account manager for details.

HOW TO CHOOSE THE CORRECT DRIVER FOR YOUR ORION LED STRIP LIGHT

Let's look at an example:

If you would like to use 5m of the OrionPRO 10W/m, 24V LED, you will need to use a driver that has a rating of at least 50W. If the driver's capacity is higher than the LED strips power draw (for example a 60W driver), you can safely power your Orion LED Tape. If you're using 48V tape, make sure to use a 48V driver.

Please be aware: You should never use driver with capacity that is smaller than maximum power of LED strip used, as this will damage the Orion LED strip.

HOW TO DETERMINE THE POWER DRAW OF THE FLEXI-STRIP

In our example the Orion LED tape is "10W/m 5M LED Strip". The Orion LED strip has a total wattage of 50 Watts, or 10 Watts per meter (10 Watts/meter x 5 meters = 50 Watts)

Please see guide below to determine which driver should be used for different Orion LED strip types and lengths (listed minimum driver capacity required):

LED strip length (m)	7.2W/M 24V	10W/M 24V	14W/M 24V	18W/M 24V
1M	12W 24V Driver	12W 24V Driver	20W 24V Driver	20W 24V Driver
2M	20W 24V Driver	25W 24V Driver	40W 24V Driver	40W 24V Driver
3M	25W 24V Driver	40W 24V Driver	50W 24V Driver	60W 24V Driver
4M	40W 24V Driver	50W 24V Driver	60W 24V Driver	75W 24V Driver
5M	40W 24V Driver	60W 24V Driver	75W 24V Driver	100W 24V Driver
6M	50W 24V Driver	75W 24V Driver	100W 24V Driver	150W 24V Driver
7M	60W 24V Driver	100W 24V Driver	100W 24V Driver	150W 24V Driver
8M	60W 24V Driver	100W 24V Driver	150W 24V Driver	150W 24V Driver
9M	75W 24V Driver	100W 24V Driver	150W 24V Driver	200W 24V Driver
10M	75W 24V Driver	150W 24V Driver	150W 24V Driver	200W 24V Driver
15M	150W 24V Driver	200W 24V Driver	240W 24V Driver	320W 24V Driver

Code		Description
98993		LED Driver Constant Voltage 24V 12W
79682		LED Driver Constant Voltage 24V 20W
79332		LED Driver Constant Voltage 24V 25W
79328		LED Driver Constant Voltage 24V 40W
98944	79333	LED Driver Constant Voltage 24V 50W
98995		LED Driver Constant Voltage 24V 60W
79329		LED Driver Constant Voltage 24V 75W
79334	98996	LED Driver Constant Voltage 24V 100W
79681		LED Driver Constant Voltage 24V 150W

Code		Description
79330		LED Driver Constant Voltage IP67 24V 75W
79331		LED Driver Constant Voltage IP67 24V 150W
92510		LED Driver Constant Voltage IP67 24V 200W
98997		LED Driver Constant Voltage IP67 24V 340W
92509		LED Driver Constant Voltage IP67 24V 320W
118832		LED Driver Constant Voltage IP67 48V 150W
118834		LED Driver Constant Voltage IP67 48V 200W
118833		LED Driver Constant Voltage IP67 48V 320W

WHAT YOU NEED TO CONSIDER BEFORE CHOOSING OUR ORION STRIP

SELECTING THE DESIRED VOLTAGE OF TAPE FOR YOUR PROJECT

Saxby offer both 24V and 48V tape. The higher voltage 48V LED tape allows you to use longer continuous runs without visible voltage drop.

SELECTING THE DESIRED BRIGHTNESS FOR A PROJECT OR INSTALLATION

Lumens is the measurement of brightness as perceived by the human eye. Different projects require a certain amount of brightness to achieve a desired look. For example:

OrionPRO 5m 10W/m will produce 100LM per meter. The higher the lumens, the brighter the effect will be.

SELECTING THE DESIRED COLOUR TEMPERATURE

The Orion LED range offers the following options, 3000K (warm white), 4000K (cool white), 6000K (daylight white), RGB (full colour spectrum) and RGBW (full colour spectrum plus white). The colour of light is measured in degrees Kelvin (K). The temperature rating directly affects what the white light will look like. Your choice of colour temperature will depend on the effect that is required for each project.

COMPARE LED STRIP LENGTH AND NUMBER OF LEDS ON THE STRIP

When comparing common LED densities there are 3 types 30/60/120 LEDs per meter. The total light output of an LED strip is simply the sum of the light output from the individual LEDs on the LED strip. LED density has a direct impact on the total amount of light output, the more LEDs per meter, the more light per meter (when comparing situations where the LED is the same). LED density affects light distribution, because the LEDs are individual "point sources" depending on how they are installed. The individual LEDs on an LED strip may create a "dotted" effect or what is also sometimes called "spotting". A higher density LED strip will have a lower chance of "spotting" and the individual LEDs cannot be seen.

WHAT DO THE NUMBERS OF THE LED CHIPS MEAN?

The different numbers on the SMD correlate to the different physical dimensions of the chip. The numbers 5050, 3528, 2835, etc. correlate to the size of the chip in millimetres. Some LEDs are brighter than others and some give off more light per watt. Saxby use SMD 5050 and SMD 2835.

COMPARE WATTAGE CONSUMED PER STRIP OF LEDS AND OPERATING VOLTAGE

The wattage will tell us how much power we are consuming while these lights are on and in turn how much the running cost will be at the end of each month. When comparing the different LED strip options be sure to verify if the wattage is given per meter or reel before you buy.

Please note: An LED strip light that uses 24 volts will not work if you purchase a 12 volt driver and may also result in risk of fire. When selecting the driver for you desired strip light, if unsure please seek guidance from a competent electrician.

ORION20 48V

Saxby's signature LED tape range

NEW
PRODUCT



- White plastic
- Constructed from polymer film
- 118822/118823 - Max. 35M per run
- 120338/120339 - Max. 15M per run
- Pre wired 300mm 18AWG



Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
118822	NEW Orion20 48V	3000	7.2W	780	108	35m	Proj: 1.4mm W: 10mm
118823	NEW Orion20 48V	4000	7.2W	810	113	35m	Proj: 1.4mm W: 10mm
120338	NEW Orion20 48V	3000	18W	1872	104	30m	Proj: 2mm W: 10mm
120339	NEW Orion20 48V	4000	18W	2033	113	30m	Proj: 2mm W: 10mm

DISPLAY TAPE




Discover the
full range of
**COMPATIBLE
ACCESSORIES**
Page 196

Code	Description	Dimensions
113688	Orion 24V/48V Tape to Tape Connector IP20	Proj: 4.95mm W: 11.5mm L: 13.5mm
113689	Orion 24V/48V T/L Connector IP20	Proj: 4.8mm W: 19.1mm L: 20.1mm
118818 NEW	Orion 48V Flexible Tape to Driver Connector IP20	Proj: 4.2mm W: 11.5mm L: 161.5mm
118819 NEW	Orion 48V Flexible Tape to Tape Connector IP20	Proj: 4.2mm W: 11.5mm L: 173mm
99052	Orion 24V/48V 30M Extension Cable	L: 30000mm

Use with our range of
RIGEL PROFILES

See page 198-201

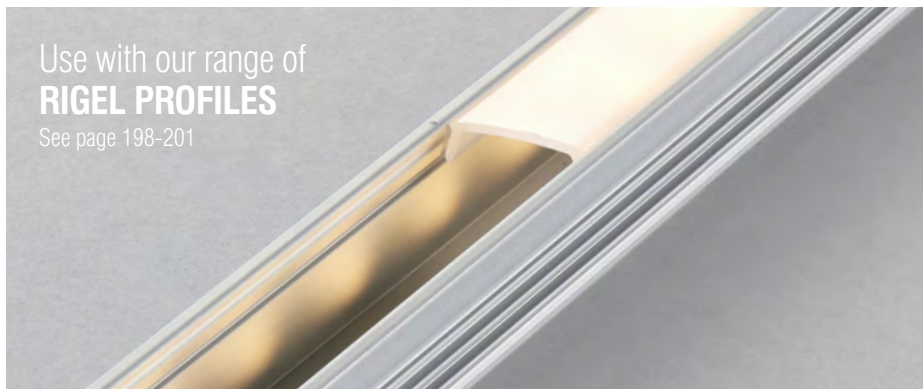

ORIONPRO 48V IP20


Saxby's signature LED tape range

NEW
PRODUCT


3YR
WARRANTY


CLASS 3


COB

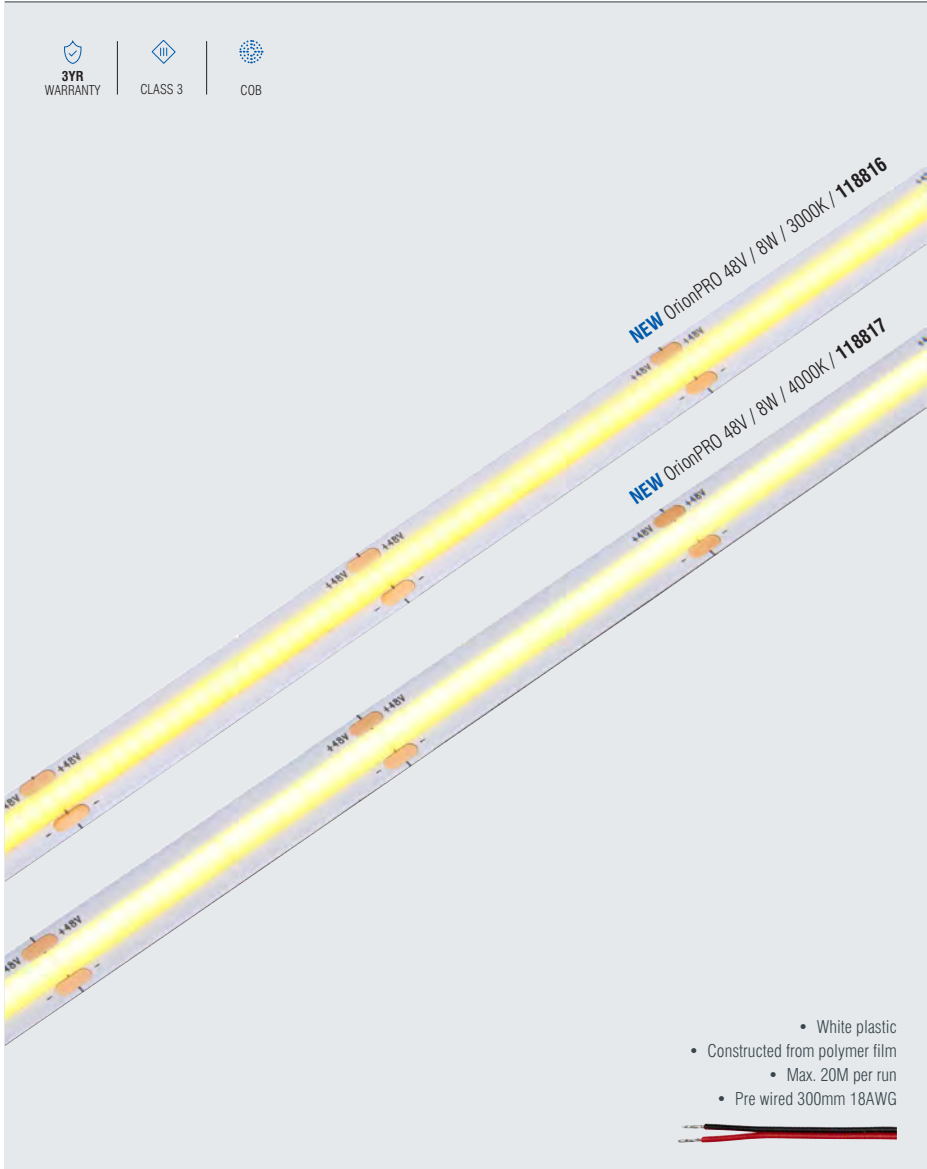

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
118816	NEW OrionPRO 48V	3000	8W	720	90	40M	Proj: 1.7mm W: 10mm
118817	NEW OrionPRO 48V	4000	8W	750	94	40M	Proj: 1.7mm W: 10mm

DISPLAY TAPE



113688




113689



118818



118819



99052

Discover the
full range of
**COMPATIBLE
ACCESSORIES**
Page 196


Code	Description	Dimensions
113688	Orion 24V/48V Tape to Tape Connector IP20	Proj: 4.95mm W: 11.5mm L: 13.5mm
113689	Orion 24V/48V T/L Connector IP20	Proj: 4.8mm W: 19.1mm L: 20.1mm
118818 NEW	Orion 48V Flexible Tape to Driver Connector IP20	Proj: 4.2mm W: 11.5mm L: 161.5mm
118819 NEW	Orion 48V Flexible Tape to Tape Connector IP20	Proj: 4.2mm W: 11.5mm L: 173mm
99052	Orion 24V/48V 30M Extension Cable	L: 30000mm




ORIONPRO 67 / ORION67 48V

Saxby's signature LED tape range

NEW
PRODUCT

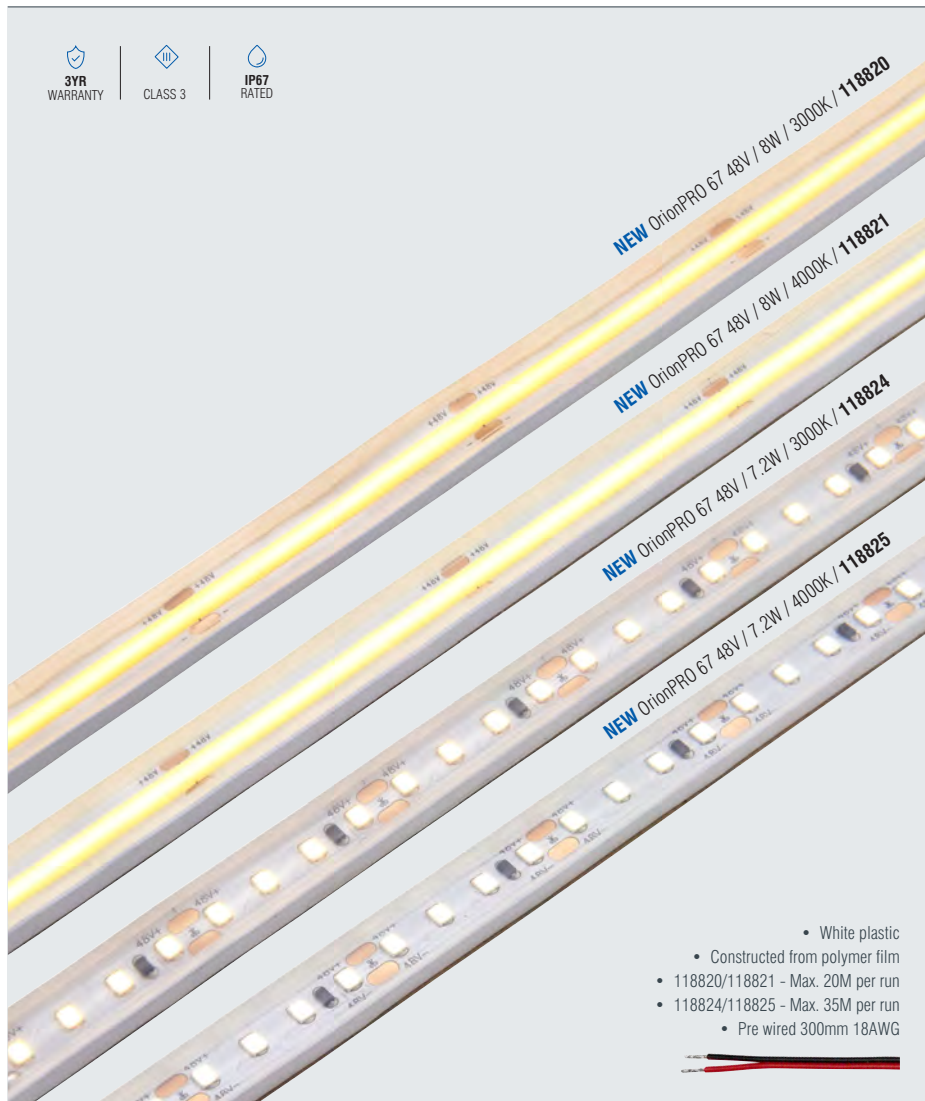

- White plastic
- Constructed from polymer film
- 118820/118821 - Max. 20M per run
- 118824/118825 - Max. 35M per run
- Pre wired 300mm 18AWG



Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
118820	NEW OrionPRO 67 48V	3000	8W	720	90	20M	Proj: 4.3mm W: 12.5mm
118821	NEW OrionPRO 67 48V	4000	8W	750	94	20M	Proj: 4.3mm W: 12.5mm
118824	NEW Orion67 48V	3000	7.2W	780	108	35M	Proj: 4.3mm W: 12.5mm
118825	NEW Orion67 48V	4000	7.2W	800	111	35M	Proj: 4.3mm W: 12.5mm

DISPLAY TAPE




106532



106533



106534



99052

Discover the
full range of
**COMPATIBLE
ACCESSORIES**

Page 196

Code	Description	Dimensions
106532	Orion 24V/48V Tape to Tape Connector IP67	Proj: 8.5mm W: 17.7mm L: 35.33mm
106533	Orion 24V/48V Flexible Tape to Tape Connector IP67	Proj: 8.5mm W: 17.7mm L: 215mm
106534	Orion 24V/48V Flexible Tape to Driver Connector IP67	Proj: 8.5mm W: 17.7mm L: 215mm
99052	Orion 24V/48V 30M Extension Cable	L: 30000mm



ORIONRGBW 48V IP20


Saxby's signature LED tape range

NEW
PRODUCT


3YR
WARRANTY


CLASS 3


SMD

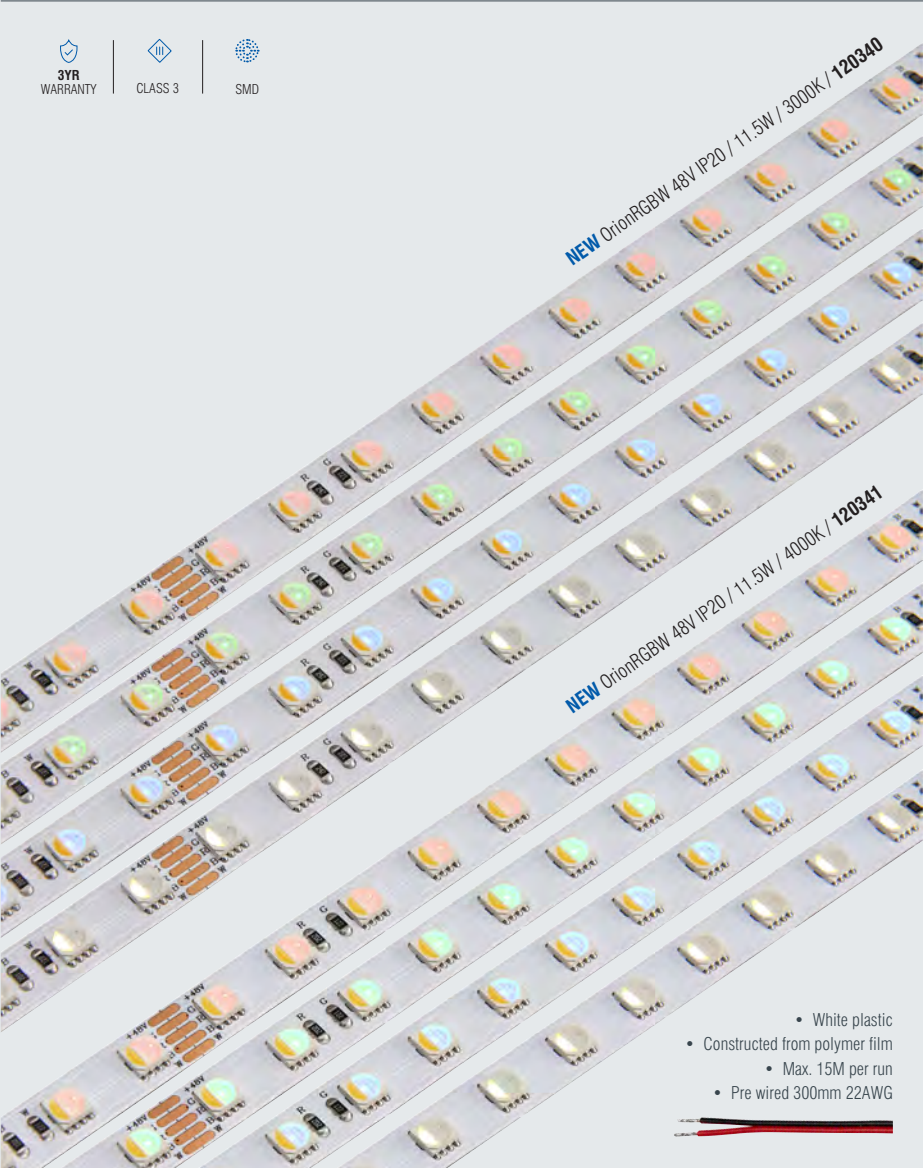

- White plastic
- Constructed from polymer film
 - Max. 15M per run
- Pre wired 300mm 22AWG

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
120340	NEW OrionRGBW 48V	3000	11.5W	1038	90	30M	Proj: 2mm W: 10mm
120341	NEW OrionRGBW 48V	4000	11.5W	1059	92	30M	Proj: 2mm W: 10mm

DISPLAY TAPE



103841




103842



103843




111672



99054

Discover the
full range of
**COMPATIBLE
ACCESSORIES**
Page 196

Code	Description	Dimensions
103841	NEW OrionRGBW 24V/48V Flexible Tape to Controller Connector IP20	Proj: 5mm W: 11mm L: 163mm
103842	NEW OrionRGBW 24V/48V Tape to Tape Connector IP20	Proj: 5mm W: 11mm L: 13mm
103843	NEW OrionRGBW 24V/48V Flexible Tape to Tape Connector IP20	Proj: 5mm W: 11mm L: 176mm
111672	NEW OrionRGBW 24V/48V Tape to Controller Connector IP20	Proj: 5.3mm W: 13.8mm L: 13.5mm
99054	OrionRGBW 24V/48V 30M Extension Cable COB & SMD	L: 30000mm

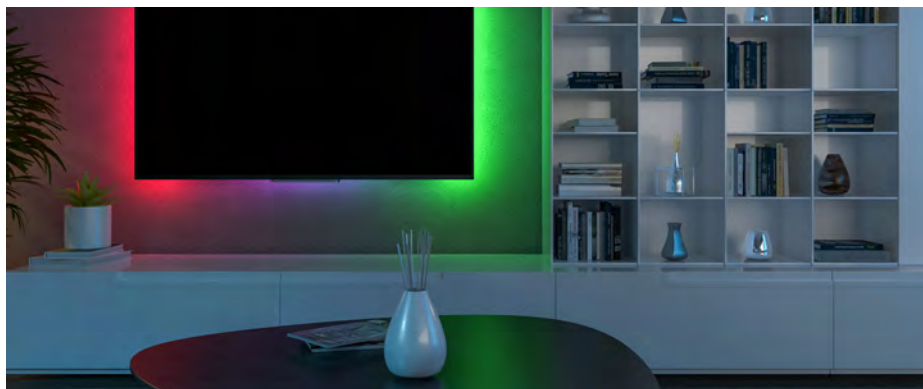

ORIONRGBW 48V IP67

Saxby's signature LED tape range


NEW
PRODUCT


3YR
WARRANTY


CLASS 3


SMD

- White plastic
- Constructed from polymer film
- Max. 15M per run
- Pre wired 300mm 22AWG

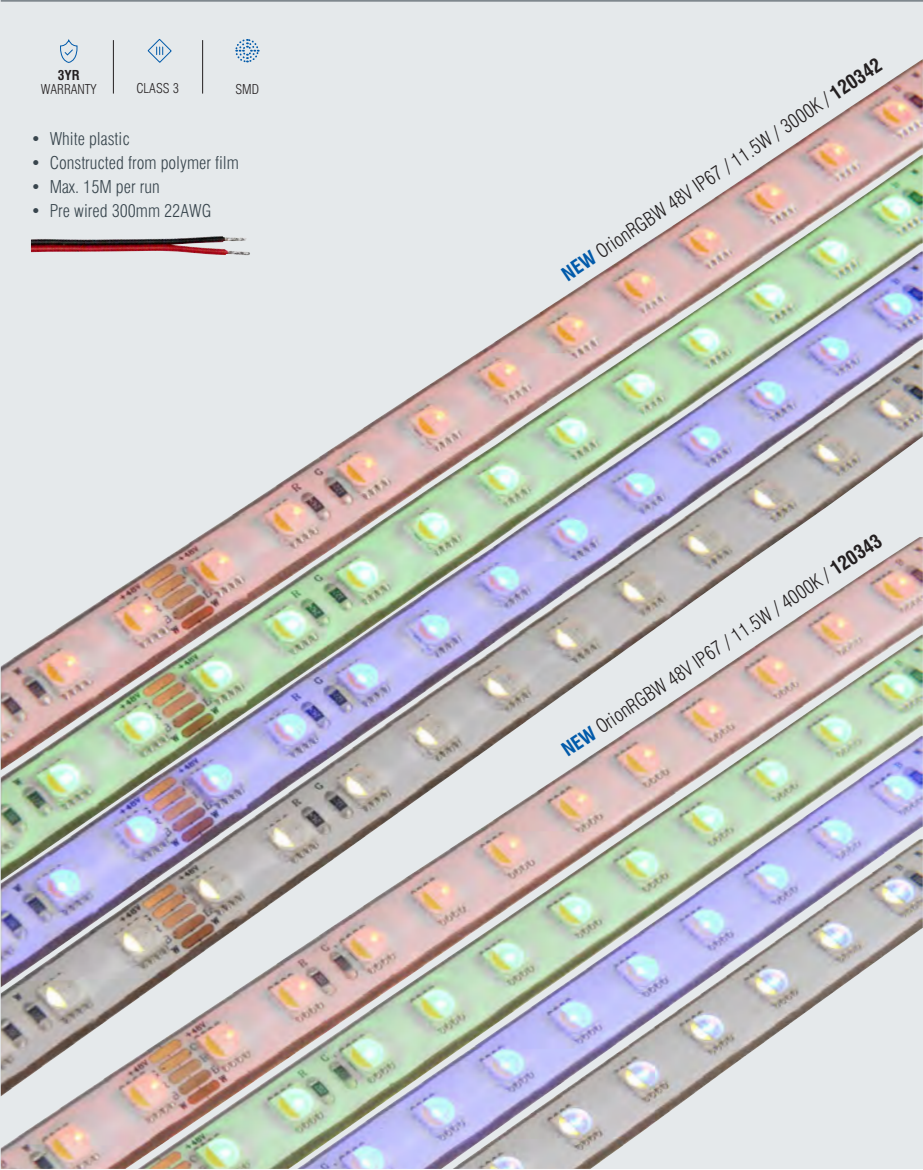

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
120342	NEW OrionRGBW 48V	3000	11.5W	904	79	30M	Proj: 4.6mm W: 12mm
120343	NEW OrionRGBW 48V	4000	11.5W	986	86	30M	Proj: 4.6mm W: 12mm

DISPLAY TAPE




120344



120345



120346




99054

Discover the
full range of
**COMPATIBLE
ACCESSORIES**

Page 196

Code	Description	Dimensions
120344	NEW OrionRGBW 48V Tape to Tape Connector IP67	Proj: 8.5mm W: 17.5mm L: 35.4mm
120345	NEW OrionRGBW 48V Flexible Tape to Driver Connector IP67	Proj: 8.5mm W: 17.5mm L: 216.6mm
120346	NEW OrionRGBW 48V Flexible Tape to Tape Connector IP67	Proj: 8.5mm W: 17.5mm L: 239.2mm
99054	OrionRGBW 24V/48V 30M Extension Cable COB & SMD	L: 30000mm

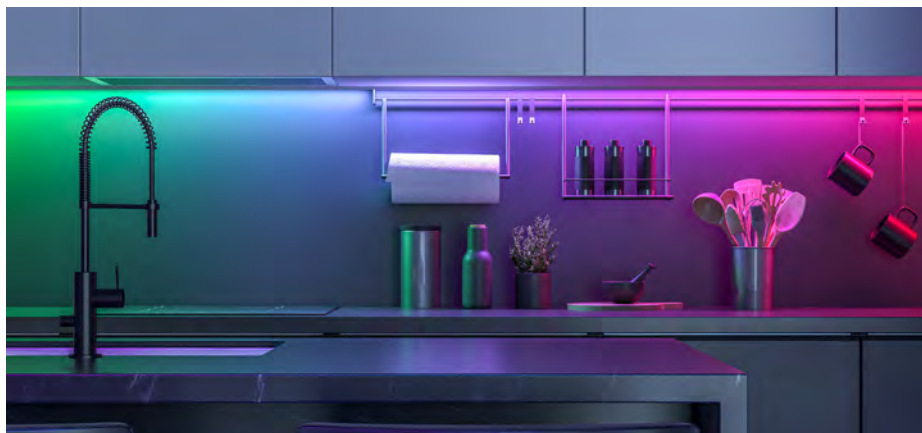

ORIONPRO 24V

Saxby's signature LED tape range




3YR
WARRANTY


CLASS 3


COB


DIMMABLE

- White plastic
- Constructed from polymer film
- Max. 12M per run, powered at both ends
- Pre wired 150mm 18AWG

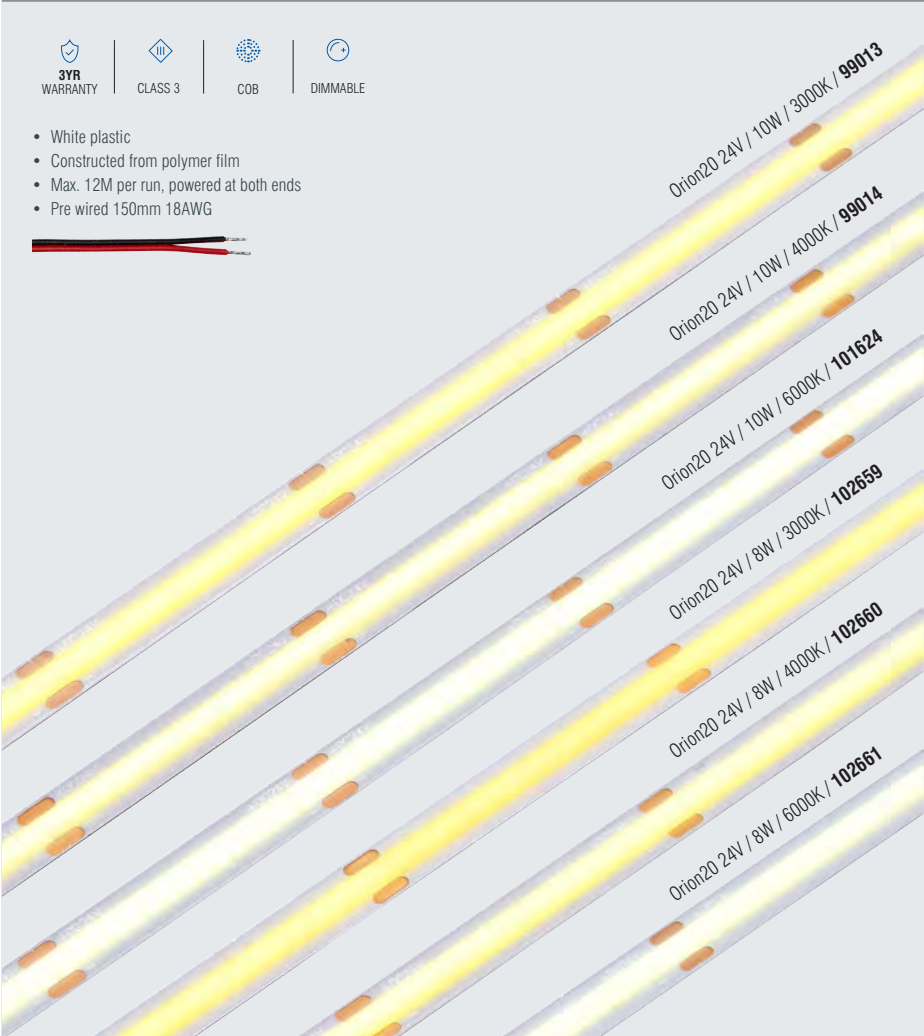

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
99013	OrionPRO 24V	3000	10W	900	90	5M	Proj: 2mm W: 8mm
99014	OrionPRO 24V	4000	10W	1000	100	5M	Proj: 2mm W: 8mm
101624	OrionPRO 24V	6000	10W	1000	100	5M	Proj: 2mm W: 8mm
102659	OrionPRO 24V	3000	8W	800	100	30M	Proj: 2mm W: 8mm
102660	OrionPRO 24V	4000	8W	800	100	30M	Proj: 2mm W: 8mm
102661	OrionPRO 24V	6000	8W	800	100	30M	Proj: 2mm W: 8mm

DISPLAY TAPE

ACCESSORIES

Compatible accessories for OrionPRO 24V range



116614



116615




102663



108282



111670



99052

Code	Description	Dimensions
116614	Orion 24V Flexible Tape to Driver Connector IP20 COB & SMD	Proj: 4.6mm W: 9.9mm L: 161.6mm
116615	Orion 24V Flexible Tape to Tape Connector IP20 COB & SMD	Proj: 4.6mm W: 9.9mm L: 161.6mm
102663	Orion 24V Tape to Tape Connector IP20 COB & SMD	Proj: 3.7mm W: 9.8mm L: 13.5mm
108282	Orion 24V T/L Connector IP20 COB & SMD	Proj: 4.9mm W: 17.2mm L: 20.05mm
111670	Orion 24V Multifunctional Connector IP20 COB & SMD	Proj: 6.7mm W: 9.8mm L: 11.5mm
99052	Orion 24V/48V 30M Extension Cable COB & SMD	L: 30000mm



ORIONFLEX 24V

Saxby's signature LED tape range


3YR
WARRANTY


CLASS 3


SMD



Code	Description	K	W/m	LM/m	LM/W/m	Reel	Dimensions
113267	OrionFLEX 24V	3000	9.6W	912	95	5M	Proj: 2mm W: 8mm
113268	OrionFLEX 24V	4000	9.6W	960	100	5M	Proj: 2mm W: 8mm
113269	OrionFLEX 24V	6000	9.6W	1008	105	5M	Proj: 2mm W: 8mm

DISPLAY TAPE

ACCESSORIES

Compatible accessories for OrionFlex 24V range




Discover the
full range of
**COMPATIBLE
ACCESSORIES**
Page 196

Code	Description	Dimensions
115106	OrionFLEX 24V Tape to Tape Connector IP20	Proj: 4.6mm W: 9.9mm L: 11.6mm
116614	Orion 24V Flexible Tape to Driver Connector IP20 COB & SMD	Proj: 4.6mm W: 9.9mm L: 161.6mm
116615	Orion 24V Flexible Tape to Tape Connector IP20 COB & SMD	Proj: 4.6mm W: 9.9mm L: 161.6mm
99052	Orion 24V/48V 30M Extension Cable COB & SMD	L: 30000mm



ORION65 24V

Saxby's signature LED tape range

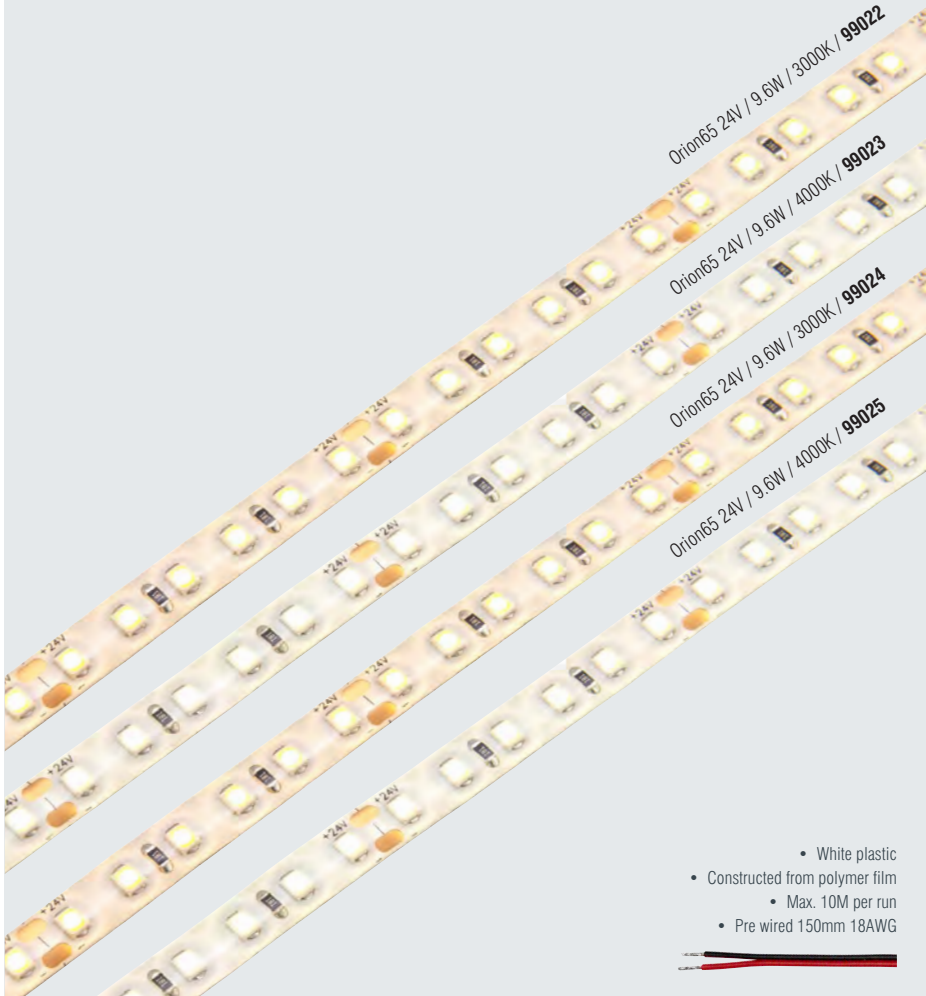

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
99022	Orion65 24V	3000	9.6W	960	100	5M	Proj: 2mm W: 8mm
99023	Orion65 24V	4000	9.6W	960	100	5M	Proj: 2mm W: 8mm
99024	Orion65 24V	3000	9.6W	960	100	30M	Proj: 2mm W: 8mm
99025	Orion65 24V	4000	9.6W	960	100	30M	Proj: 2mm W: 8mm

DISPLAY TAPE

ACCESSORIES

Compatible accessories for Orion65 24V range



Code	Description	Dimensions
99034	Orion65 24V Flexible Tape to Tape Connector IP65	Proj: 8.4mm W: 17.6mm L: 180.4mm
99033	Orion65 24V Tape to Tape Connector IP65	Proj: 8.4mm W: 17.6mm L: 15.2mm
99032	Orion65 24V Tape to Driver Connector IP65	Proj: 8.4mm W: 17.6mm L: 165.2mm
99052	Orion 24V/48V 30M Extension Cable COB & SMD	L: 30000mm



ORIONPRO NEON FLEX 24V

Saxby's signature LED tape range


3YR
WARRANTY


CLASS 3


COB


IP67
RATED


5
SDCM

OrionPRO NEON FLEX 24V / 10W / 3000K / **106530**

OrionPRO NEON FLEX 24V / 10W / 4000K / **106531**

- White plastic
- Constructed from polymer film
- Max. 12M per run, powered at both ends
 - Pre wired 150mm 18AWG



Code	Description	K	W/m	LM/m	LM/W/m	Reel	Dimensions
106530	OrionPRO Neon Flex 24V	3000	10W	850	85	5M	Proj: 4mm W: 12mm
106531	OrionPRO Neon Flex 24V	4000	10W	900	90	5M	Proj: 4mm W: 12mm

DISPLAY TAPE

ACCESSORIES

Compatible accessories for OrionPRO Neon Flex 24V range



Code	Description	Dimensions
106532	Orion 24V/48V Tape to Tape Connector IP67 COB & SMD	Proj: 8.5mm W: 17.7mm L: 35.33mm
106533	Orion 24V/48V Flexible Tape to Tape Connector IP67 COB & SMD	Proj: 8.5mm W: 17.7mm L: 215mm
106534	Orion 24V/48V Flexible Tape to Driver Connector IP67 COB & SMD	Proj: 8.5mm W: 17.7mm L: 215mm



ORIONRGBW 24V

Saxby's signature LED tape range



3YR
WARRANTY




CLASS 3



SMD

- White plastic
- Constructed from polymer film
- Max. 12M per run, powered at both ends
- Pre wired 150mm 22AWG

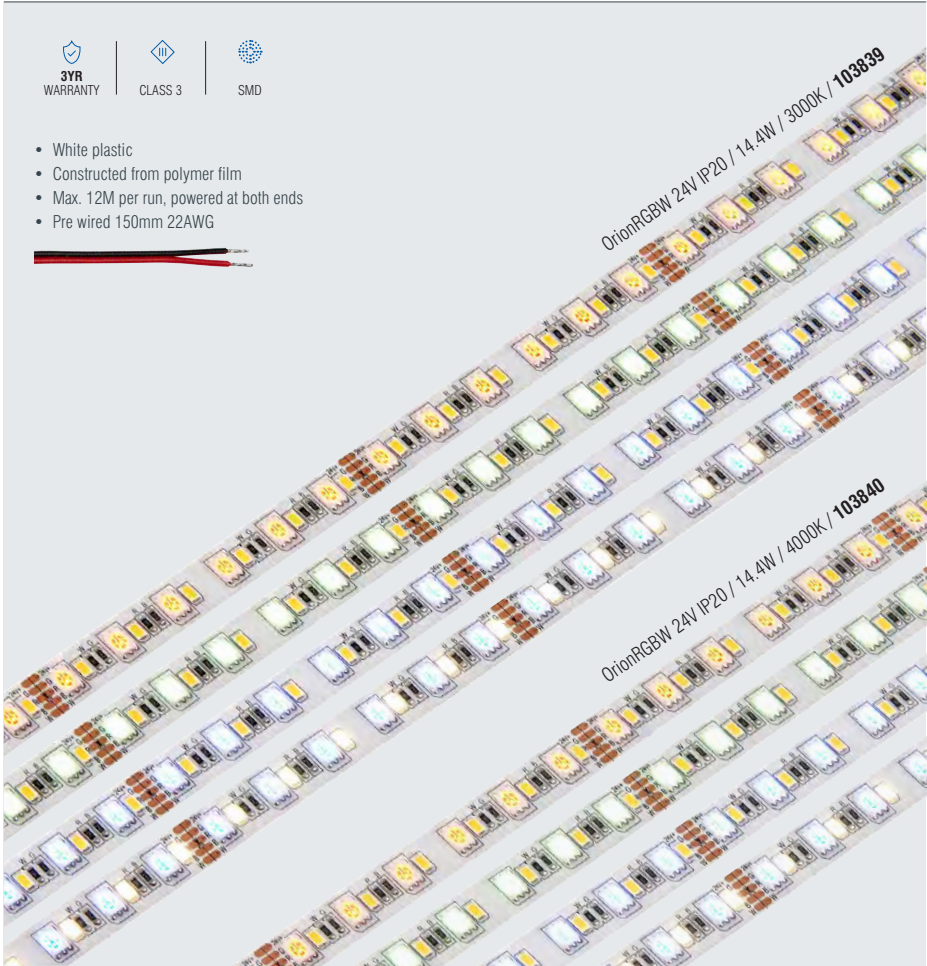

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
103839	OrionRGBW 24V	3000	14.4W	480	33	30M	Proj: 2mm W: 10mm
103840	OrionRGBW 24V	4000	14.4W	480	33	30M	Proj: 2mm W: 10mm


DISPLAY TAPE

ACCESSORIES

Compatible accessories for OrionRGBW 24V range



103841



103842



103843



111672



99054

Discover the
full range of
**COMPATIBLE
ACCESSORIES**
Page 196

Code	Description	Dimensions
103841	OrionRGBW 24V/48V Flexible Tape to Controller Connector IP20	Proj: 5mm W: 11mm L: 163mm
103842	OrionRGBW 24V/48V Tape to Tape Connector IP20	Proj: 5mm W: 11mm L: 13mm
103843	OrionRGBW 24V/48V Flexible Tape to Tape Connector IP20	Proj: 5mm W: 11mm L: 176mm
111672	OrionRGBW 24V/48V Tape to Controller Connector IP20	Proj: 5.3mm W: 13.8mm L: 13.5mm
99054	OrionRGBW 24V/48V 30M Extension Cable COB & SMD	L: 30000mm



ORIONPRO RGBW 24V



Saxby's signature LED tape range


3YR
WARRANTY


CLASS 3


COB

- White plastic
- Constructed from polymer film
- Max. 5M per run
- Pre wired 150mm 22AWG

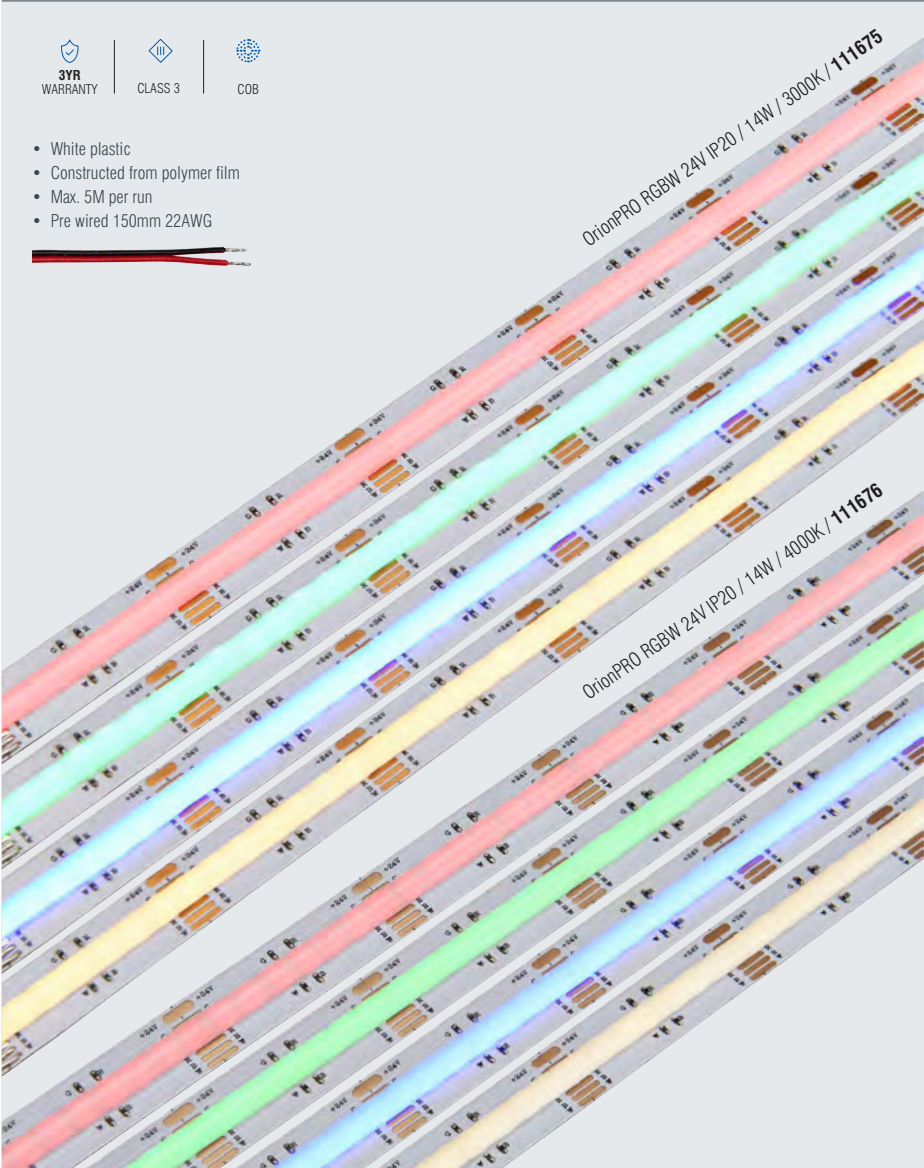

Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
111675	OrionPRO RGBW 24V	3000	14W	280	20	5M	Proj: 2mm W: 12mm
111676	OrionPRO RGBW 24V	4000	14W	290	21	5M	Proj: 2mm W: 12mm

DISPLAY TAPE

ACCESSORIES

Compatible accessories for OrionPRO RGBW 24V range



111678




111677



113685



111679



99054

Discover the
full range of
**COMPATIBLE
ACCESSORIES**
Page 196

Code	Description	Dimensions
111678	OrionPRO RGBW 24V Tape to Controller Connector IP20	Proj: 5.3mm W: 13.8mm L: 13.5mm
111677	OrionPRO RGBW 24V Flexible Tape to Controller Connector IP20	Proj: 5.3mm W: 13.8mm L: 163.5mm
113685	OrionPRO RGBW 24V L Connector IP20	Proj: 4.9mm W: 20.9mm L: 20.9mm
111679	OrionPRO RGBW 24V Tape to Tape Connector IP20	Proj: 5.3mm W: 13.8mm L: 13.5mm
99054	OrionRGBW 24V/48V 30M Extension Cable COB & SMD	L: 30000mm




ORIONRGB 24V

Saxby's signature LED tape range


3YR
WARRANTY


CLASS 3


RGB
SMD

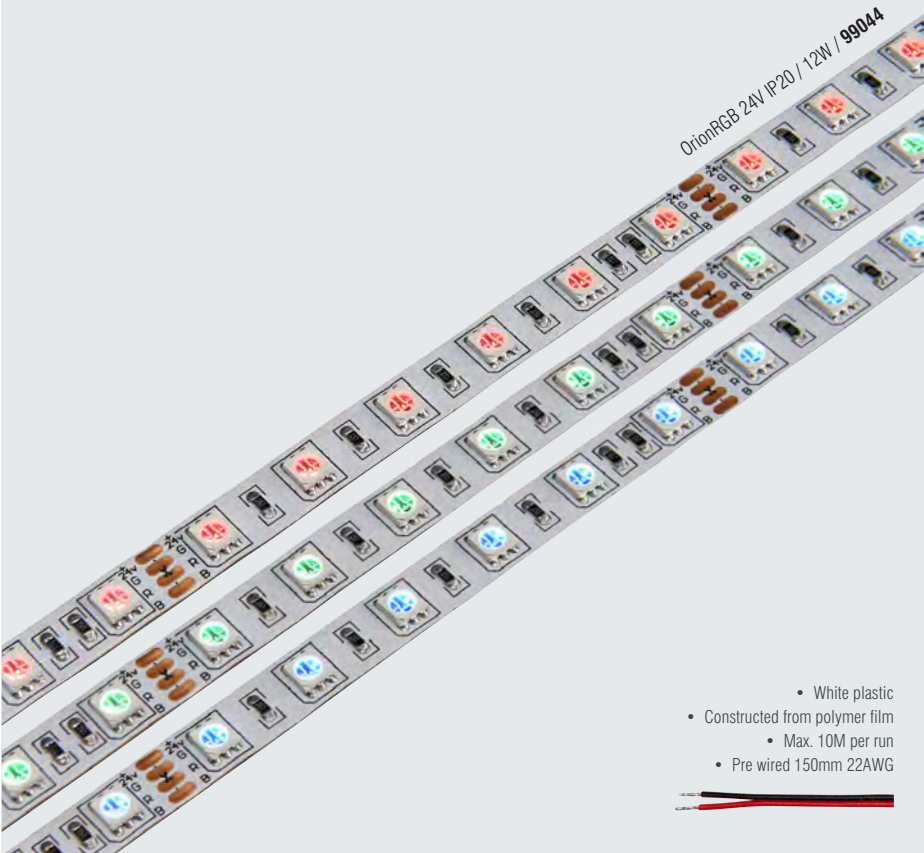

- White plastic
- Constructed from polymer film
 - Max. 10M per run
- Pre wired 150mm 22AWG



Code	Description	K	W/m	LM/m	LM/W	Reel	Dimensions
99044	OrionRGB 24V	RGB	12W	-	-	30M	Proj: 2mm W: 10mm

DISPLAY TAPE

ACCESSORIES


Compatible accessories for OrionRGB 24V range



108284



108283



111671



108285



99048



99049



99053

Discover the
full range of
**COMPATIBLE
ACCESSORIES**

Page 196

Code	Description	Dimensions
108284	OrionRGB 24V Tape to Tape Connector IP20	Proj: 5mm W: 11.5mm L: 13.5mm
108283	OrionRGB 24V Flexible Tape to Controller Connector IP20	Proj: 5.9mm W: 11.5mm L: 163.5mm
111671	OrionRGB 24V Tape to Controller Connector IP20	Proj: 5.3mm W: 11.5mm L: 13.5mm
108285	OrionRGB 24V Flexible Tape to Tape Connector IP20	Proj: 5.9mm W: 11.5mm L: 177mm
99048	OrionRGB 24V T Connector IP20	Proj: 5.4mm W: 49.5mm L: 29.5mm
99049	OrionRGB 24V X Connector IP20	Proj: 5.4mm W: 49.5mm L: 49.5mm
99053	OrionRGB 24V 30M Extension Cable	L: 30000mm

ACCESSORIES

Orion accessories compatible with all tapes in the range

NEW
OPTIONS



108281



118831



120347



120348



120812



117528



99030



99031



113270

Code	Description	Dimensions
108281	Orion Crimping Tool	H: 17mm W: 100mm L: 146mm
118831	NEW Orion Tape Roller	H: 23mm W: 48mm L: 213mm
120347	NEW Orion 24/48V Remote Control	H: 18mm W: 50mm L: 150mm
120348	NEW Orion 24/48V Receiver	H: 17mm W: 45mm L: 107mm
120812	NEW Orion 24V/48V Wall Mount Control Panel	H: 20mm Sq: 86mm
117528	NEW Orion Empty Tape Reel	H: 16mm W: 177.8mm L: 177.8mm
99030	Orion Glue with Nozzle for IP65/67 Tapes	W: 16mm
99031	Orion Accessory Pack for IP65/67 Tapes	-
113270	IR Sensor for 12/24V Tapes	H: 29mm W: 45mm L: 76mm

DISPLAY ACCESSORIES

LED DRIVER CONSTANT VOLTAGE

A range of dimmable & non dimmable drivers



79682, 98993



79332



79333, 79334, 79681



79328, 79329, 98994, 98995, 98996



79330, 79331, 98997, 92509, 92510,
118832, 118833, 118834




118614

Description	24V	24V DIM	Dimensions
LED Driver Constant Voltage 12W	98993	-	H: 22mm W: 39mm L: 98mm
LED Driver Constant Voltage 20W	79682	-	H: 28mm W: 44mm L: 113mm
LED Driver Constant Voltage 25W	-	79332	H: 30mm W: 52mm L: 128mm
LED Driver Constant Voltage 40W	79328	-	H: 24mm W: 52mm L: 166mm
LED Driver Constant Voltage 50W	98994	79333	H: 32mm W: 61mm L: 184mm
LED Driver Constant Voltage 60W	98995	-	H: 32mm W: 61mm L: 184mm
LED Driver Constant Voltage 75W	79329	-	H: 32mm W: 61mm L: 184mm
LED Driver Constant Voltage 100W	98996	79334	See product pages on saxbytrade.com
LED Driver Constant Voltage 150W	79681	-	H: 34mm W: 67mm L: 210mm
NEW LED Driver Constant Voltage 300W Linear	118614	-	H: 28mm W: 42mm L: 296mm



Description	24V	48V	Dimensions
LED Driver Constant Voltage IP67 75W	79330	-	H: 39mm W: 64mm L: 186mm
LED Driver Constant Voltage IP67 150W	79331	118832	See product pages on saxbytrade.com
LED Driver Constant Voltage IP67 200W	 92510	118834	H: 40mm W: 72mm L: 249mm
LED Driver Constant Voltage IP67 240W	98997	-	H: 40mm W: 72mm L: 249mm
LED Driver Constant Voltage IP67 320W	92509	118833	See product pages on saxbytrade.com

RIGEL RECESSED



Extrusion accessories and options with a 2 year warranty




80499




108286




97739



97736



94947



ORION TAPE

Full range of Orion Tapes can be found on pages 172-195




Code	Description	Finish	Dimensions
80499	Rigel Recessed	Silver & opal polycarbonate	Proj: 13.4mm W: 23.1mm L: 2000mm
108286	Rigel Recessed	Matt black & opal polycarbonate	Proj: 13.4mm W: 23.1mm L: 2000mm
97739	Rigel Recessed Wide	Silver & opal polycarbonate	H: 21.5mm W: 30mm L: 2000mm
97736	RigelSLIM Recessed Wide	Silver & opal polycarbonate	H: 11.2mm W: 30.7mm L: 2000mm
94947	RigelSLIM Recessed	Silver & opal polycarbonate	Proj: 6mm W: 21.7mm L: 2000mm

RIGEL PLASTER-IN


Extrusion accessories and options with a 2 year warranty




80500




107409




94948




113564



102665



102667



- Constructed from aluminium alloy & polycarbonate
- Supplied with fitting clips & end caps, with and without holes

Code	Description	Finish	Dimensions
80500	Rigel Plaster-in	Silver & opal polycarbonate	Proj: 15.4mm W: 56.9mm L: 2000mm
107409	Rigel Plaster-in 80500 Cover	Matt white & opal polycarbonate	Proj: 5.4mm W: 15.9mm L: 2000mm
94948	Rigel Plaster-in Wide	Silver & opal polycarbonate	Proj: 14mm W: 64mm L: 2000mm
113564	Rigel Plaster-in Curve 2m	Silver anodised & opal pc	Proj: 12.86mm W: 54.6mm L: 2000mm
102665	Rigel Wall Flange Plaster-in	Matt white & opal polycarbonate	H: 19.6mm W: 100mm L: 2000mm
102667	Rigel Plaster-in Wall Washer	Matt white & opal polycarbonate	H: 40mm W: 95mm L: 2000mm



RIGEL CORNER & BENDABLE

Extrusion accessories and options with a 2 year warranty


NEW
OPTION




97737




80501



108287



97732



ORION TAPE

Full range of Orion Tapes can be found on pages 172-195




Code	Description	Finish	Dimensions
97737	Rigel Corner Wide	Silver & opal polycarbonate	H: 30mm W: 30mm L: 2000mm
80501	Rigel Corner	Silver & opal polycarbonate	Proj: 16mm W: 16mm L: 2000mm
80501-30PK	NEW Rigel Corner 30 Pack	Silver & opal polycarbonate	Proj: 16mm W: 16mm L: 2000mm
108287	Rigel Corner	Matt black & opal polycarbonate	Proj: 16mm W: 16mm L: 2000mm
97732	Rigel Bendable	Silver & opal polycarbonate	Proj: 5.0mm W: 18.0mm L: 2000mm


DISPLAY EXTRUSION




80497




94946




97734




97735



80498



97738



Code	Description	Finish	Dimensions
80497	RigelSLIM Surface	Silver & opal polycarbonate	Proj: 9mm W: 17mm L: 2000mm
80497-30PK	NEW RigelSLIM Surface 30 Pack	Silver & opal polycarbonate	Proj: 9mm W: 17mm L: 2000mm
94946	RigelSLIM Surface	Matt black & opal polycarbonate	Proj: 9mm W: 17mm L: 2000mm
97734	RigelSLIM Surface	Matt white & opal polycarbonate	Proj: 9mm W: 17mm L: 2000mm
97735	RigelSLIM Surface Wide	Silver & opal polycarbonate	H: 11.2mm W: 23.5mm L: 2000mm
80498	Rigel Surface	Silver & opal polycarbonate	Proj: 13.5mm W: 16.5mm L: 2000mm
97738	Rigel Surface Wide	Silver & opal polycarbonate	H: 21.5mm W: 23.5mm L: 2000mm



BATHROOM

Saxby Lighting boasts a range of bathroom lights that are appropriate for various bathroom zones. These come in an array of designs, finishes and colour temperatures to suit your lighting requirements. There's everything from spotlights to shaver mirrors.

SPOTLIGHT	205
COLLECTION	206
FLUSH	207
WALL	209
MIRROR	219



NEW
DESIGN

KNIGHT

Sleek range of spotlights in a polished chrome finish


2YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED


90°
TILT


350°
ROTATION

PREMIUM
CONSTRUCTION



- Constructed from die cast aluminium alloy & glass

Code	Description	Finish	Lamp	Dimensions
81569	NEW Knight 1lt Plate	Chrome plate	GU10 (required)	Proj: 160mm Dia: 80mm
81570	NEW Knight 3lt Bar	Chrome plate	3 x GU10 (required)	Proj: 160mm L: 600mm W: 50mm
81571	NEW Knight 3lt Plate	Chrome plate	3 x GU10 (required)	Proj: 160mm Dia: 220mm

Order online www.saxbytrade.com

PURE

Chrome plate fittings with stylish opal glass

- 
2YR
WARRANTY
- 
DIMMABLE
- 
IP44
RATED



- Constructed from steel & opal duplex glass

Code	Description		Finish	Lamp	Dimensions
34200	Pure 3lt Flush		Chrome plate	3 x G9 (required)	Proj: 90mm Dia: 280mm
34483	Pure 1lt Wall		Chrome plate	E14 candle (required)	Proj: 82mm H: 212mm W: 85mm

BATHROOM COLLECTION

PORTICO

Simple flush lights available in LED and non-LED options

CLASS 2

IP44
RATED



- Constructed from steel & frosted glass

Code	Description		Finish	Lamp	K	LM	LM/W	Dimensions
12421	Portico Flush	2YR	Satin nickel	E27 GLS (required)	-	-	-	Proj: 85mm Dia: 300mm
59850	Portico Flush	2YR	Chrome plate	E27 GLS (required)	-	-	-	Proj: 85mm Dia: 300mm
54675	Portico LED Flush	3YR	Satin nickel	9W LED module (SMD)	3000/4000/6000	650	72	Proj: 85mm Dia: 300mm
54676	Portico LED Flush	3YR	Chrome plate	9W LED module (SMD)	3000/4000/6000	650	72	Proj: 85mm Dia: 300mm

Order online www.saxbytrade.com

CETO CCT

Stylish & slimline LED flush lights

NEW
OPTION



3YR
WARRANTY


CLASS 2


SMD


IP54
RATED

UP TO
1480
LUMENS

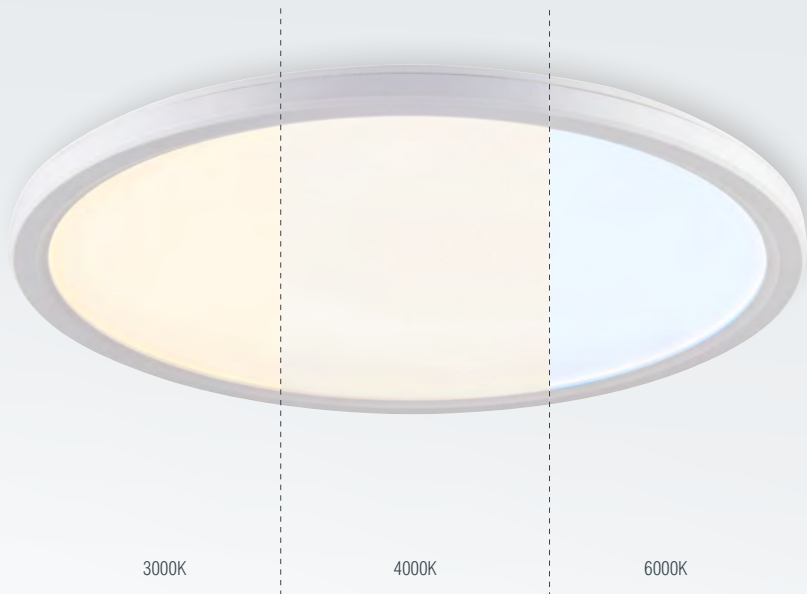

- Constructed from polystyrene & abs
- Complete with integrated control gear



Fast fix



CCT switch

Code	Description	Finish	W	K	LM	LM/W	Dimensions
112539	Ceto CCT	Matt white	12W	3000/4000/6000	1200	100	Proj: 26mm Dia: 293mm
120333	NEW Ceto CCT	Chrome	12W	3000/4000/6000	1480	123	Proj: 26mm Dia: 293mm

BATHROOM FLUSH

- 
2YR
WARRANTY
- 
CLASS 1
- 
IP44
RATED
- 
PULL
CORD



- Constructed from steel
- Chrome plate finish

Code	Description	Lamp	Dimensions
39608	Lipco 1lt Wall	G9 (required)	Proj: 130mm H:160mm W: 90mm

Contemporary chrome plated wall light with pull cord

2YR
WARRANTY

CLASS 1

DIMMABLE

IP44
RATED

PULL
CHORD



• Constructed from iron and glass

Code	Description	Finish	Lamp	Dimensions
120815	NEW Ori 1lt Wall	Chrome	G9 (required)	Proj: 135mm H: 190mm W: 100mm

BATHROOM WALL

Stylish chrome plated wall light in cylindrical glass

2YR
WARRANTY

CLASS 1

DIMMABLE

IP44
RATED



• Constructed from iron and glass

Code	Description	Finish	Lamp	Dimensions
120814	NEW Sten 1lt Wall	Chrome	E14 (required)	Proj: 119mm H: 232.5mm W: 100mm

Order online www.saxbytrade.com

FROST

Frosted glass up/down wall light

NEW
PRODUCT

- 2YR WARRANTY
- CLASS 1
- DIMMABLE
- IP44 RATED



- Constructed from iron and glass

Code	Description	Finish	Lamp	Dimensions
121016	NEW Frost 2lt Wall	Chrome	2 x E14 (required)	Proj: 115mm H: 420.2mm W: 100mm

BATHROOM WALL


2YR
WARRANTY


CLASS 2


IP44
RATED



- Constructed from steel & matt opal duplex glass
- Chrome plate finish

Code	Description	Lamp	Dimensions
39363	Ice 2lt Wall	2 x G9 (required)	Proj: 75mm H: 246mm W: 83mm

Order online www.saxbytrade.com

MODA

Modern take on classic bathroom lighting

**2YR**
WARRANTY


CLASS 2

SMD

IP44
RATED

ROCKER
SWITCH

1600
LUMENS

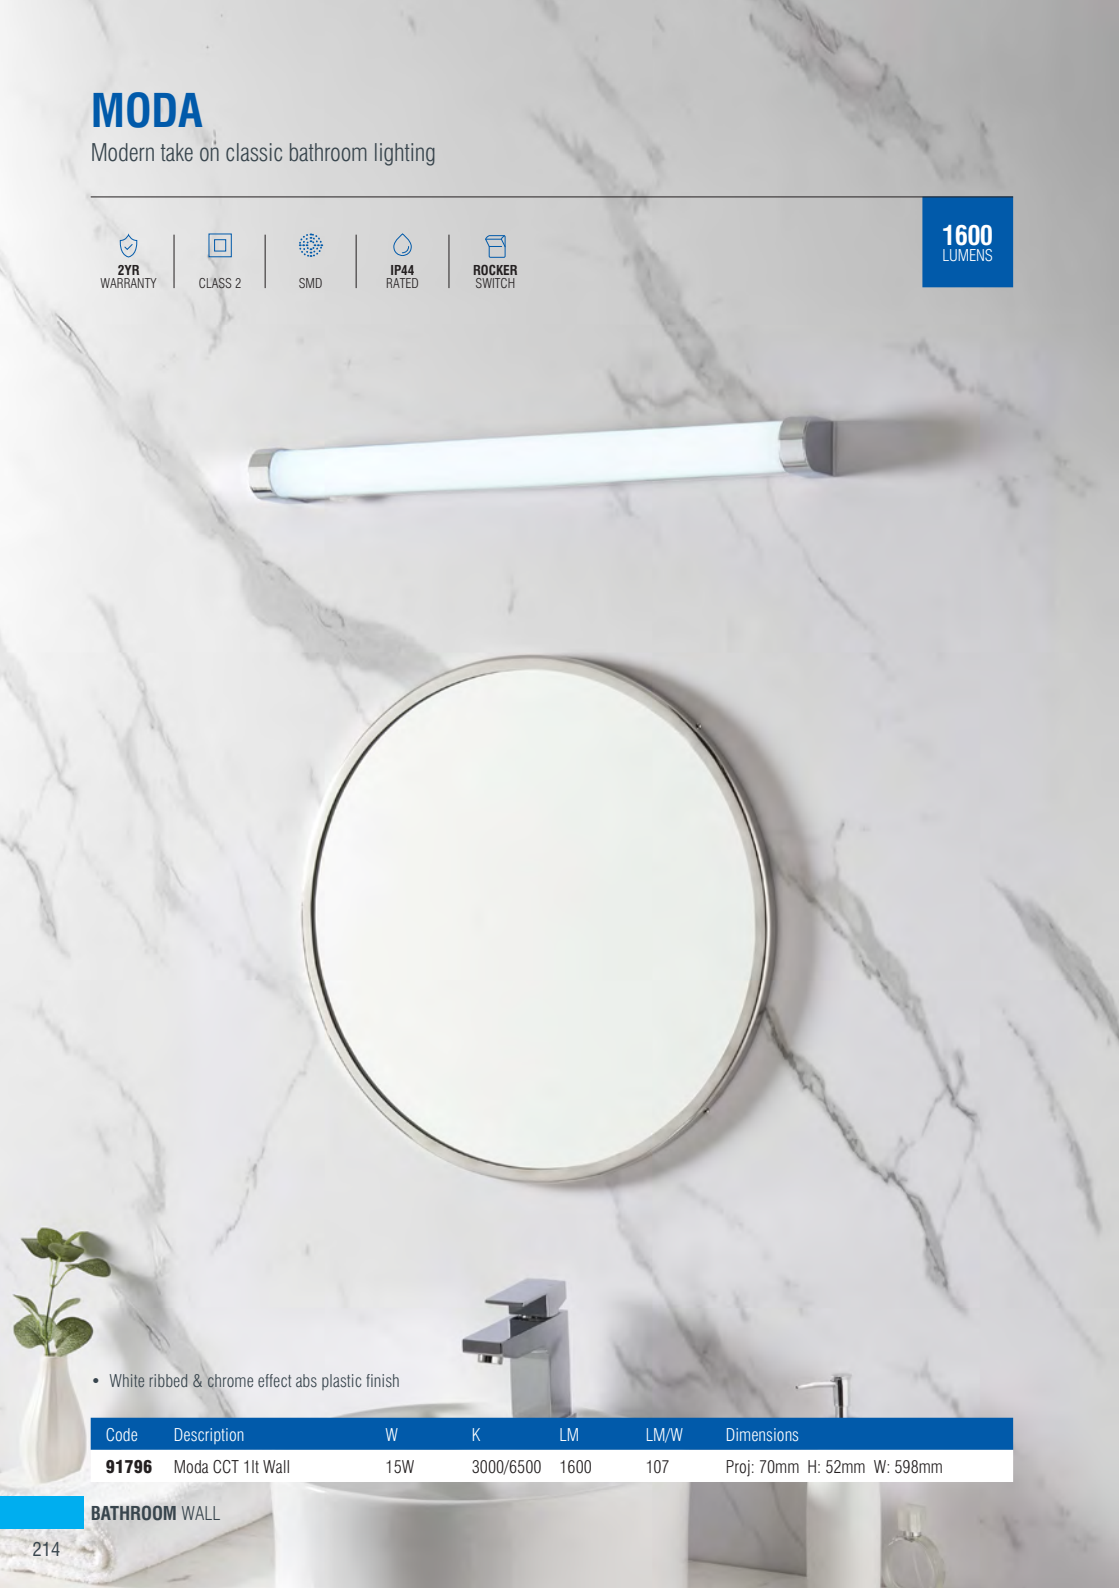

- White ribbed & chrome effect abs plastic finish

Code	Description	W	K	LM	LM/W	Dimensions
91796	Moda CCT 1lt Wall	15W	3000/6500	1600	107	Proj: 70mm H: 52mm W: 598mm

BATHROOM WALL


2YR
WARRANTY


CLASS 2


SMD


IP44
RATED


PULL
CORD


SHAVER
SOCKET

600
LUMENS

DUAL
SHAVER
SOCKET



- Constructed from polycarbonate & acrylic
- 110V - 240V switched
- Both chrome and white panels included



Different colour tabs



Shaver socket included

Code	Description	Finish	W	K	LM	LM/W	Dimensions
91797	Onan Shaver	Chrome & white	12W	4000	600	50	Proj: 69mm H: 80mm W: 522mm

Order online www.saxbytrade.com

JUDE CCT

Modern & sleek dual voltage shaver light

NEW
PRODUCT


3YR
WARRANTY


CLASS 1



SMD


IP44
RATED


SHAVER
SOCKET

850
LUMENS

SHAVER
SOCKET

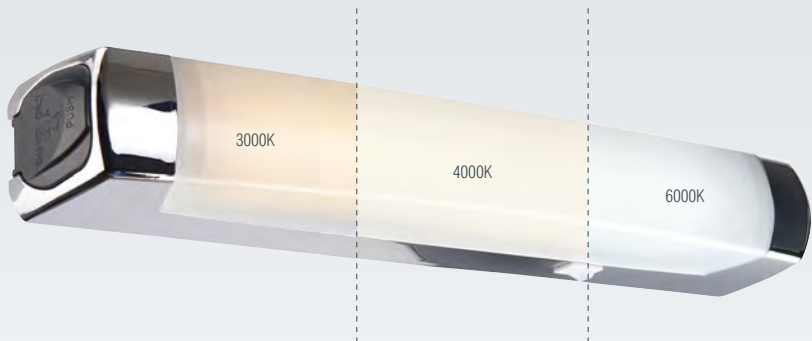

- Constructed from polycarbonate & acrylic
- 110V - 240V switched



Dual voltage switch



Shaver socket

Code	Description	Finish	W	K	LM	LM/W	Dimensions
113573	NEW Jude CCT	Chrome	8W	3000/4000/6000	850	106	Proj: 84mm H: 64mm W: 439mm

BATHROOM WALL





NEW
PRODUCT

ESPELLO CCT

Modern mirrors with backlit LED technology


3YR
WARRANTY


CLASS 2




SMD


DIMMABLE


IP44
RATED


DE- MIST
PAD

UP TO
1400
LUMENS



- Constructed from glass & ps plastic

Versatile mounting options

Touch button

Code	Description	W	K	LM	LM/W	Dimensions
118620	NEW Espello CCT Round	29W	3000/4000/6500	1200	41	Dia: 600mm Proj: 29mm
118621	NEW Espello CCT Rectangular	34W	3000/4000/6500	1400	41	H: 700mm W: 500mm Proj: 29mm

Order online www.saxbytrade.com

LUSTRO CCT

Modern mirrors combining backlit LED technology with radiant outer light ring


3YR
WARRANTY


CLASS 2


SMD



DIMMABLE


IP44
RATED


DE- MIST
PAD

NEW
PRODUCT

UP TO
1200
LUMENS

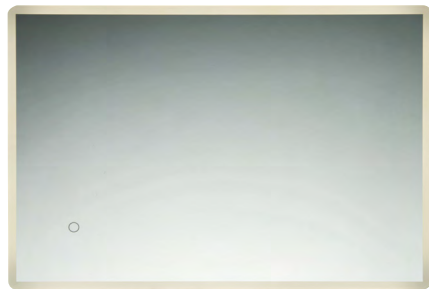

Versatile mounting options



TOUCH
BUTTON



DE- MIST
PAD



BACKLIT
SURROUND

- Constructed from glass & ps plastic

Code	Description	W	K	LM	LM/W	Dimensions
118622 NEW	Lustro CCT Round	30W	3000/4000/6500	950	32	Dia: 598mm Proj: 29mm
118623 NEW	Lustro CCT Rectangular	35W	3000/4000/6500	1200	34	H: 700mm W: 500mm Proj: 29mm

BATHROOM MIRROR





NEW
PRODUCT

ANIANI CCT

Stylish bathroom mirror light with optional strap


3YR
WARRANTY


CLASS 2


SMD


DIMMABLE


IP44
RATED


DE-MAST
PAD

650
LUMENS



- Constructed from aluminium & glass
- Install with or without strap

Code	Description	W	K	LM	LM/W	Dimensions
118624	NEW Aniani CCT Round	29W	3000/4000/6500	650	22	Dia: 600mm Proj: 30mm

Order online www.saxbytrade.com

NICO CCT

Best-selling shaver mirror with continuous light strips


3YR
WARRANTY


CLASS 1


SMD


IP44
RATED


MOTION
SENSOR


SHAVER
SOCKET


DE- MIST
PAD

DUAL
SHAVER
SOCKET



- Constructed from mirrored glass & steel
- Matt silver finish



115V - 240V dual shaver socket

Code	Description	W	K	LM	LM/W	Dimensions
60899	Nico Shaver Mirror	14.5W	3000/4000/6500	330	23	H: 700mm W: 500mm Proj: 42mm

BATHROOM MIRROR

PERLE CCT

Contemporary shaver mirror with LEDs providing a sharp, crisp light


2YR
WARRANTY


CLASS 1


SMD



IP44
RATED


MOTION
SENSOR


SHAVER
SOCKET


DE- MIST
PAD

DUAL
SHAVER
SOCKET

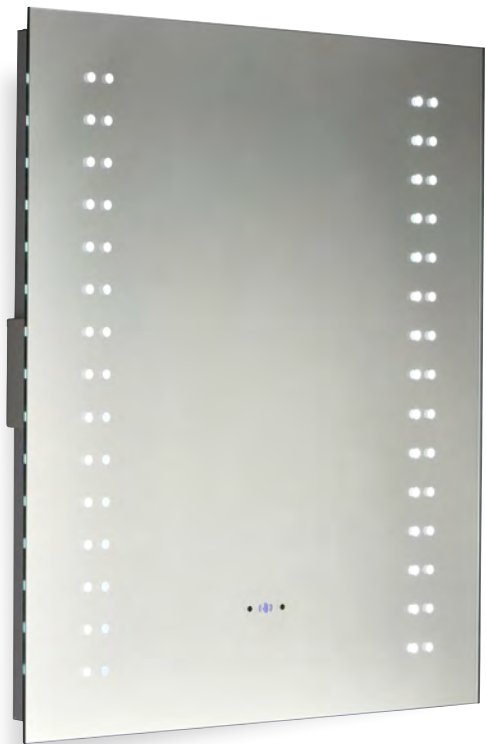

3000K



6500K

- Constructed from mirrored glass & steel
- Matt silver finish
- Tunable between 3000 and 6500K



115V - 240V dual shaver socket

Code	Description	W	K	LM	LM/W	Dimensions
13760	Perle Shaver Mirror	13.2W	3000-6500	45	3	H: 600mm W: 500mm Proj: 42mm

Order online www.saxbytrade.com

SPEGEL CCT

LED bathroom mirror which features a motion sensor and built-in shaver socket


2YR
WARRANTY


CLASS 1



SMD


IP44
RATED


MOTION
SENSOR


SHAVER
SOCKET

DUAL
SHAVER
SOCKET

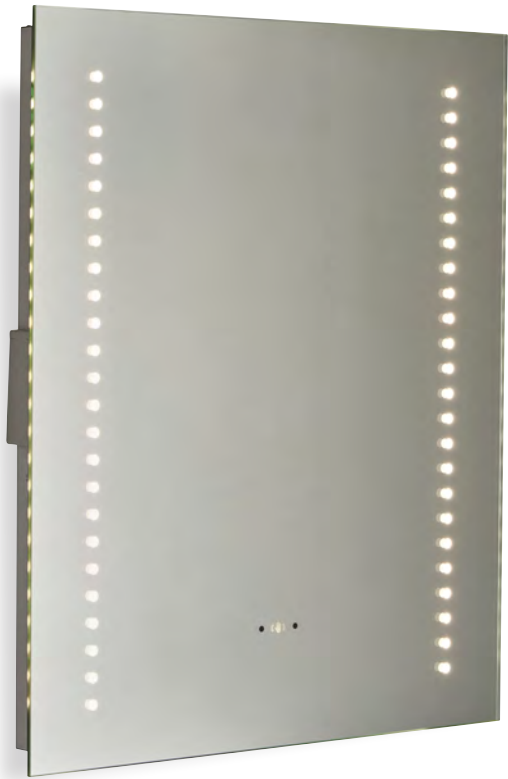

- Constructed from mirrored glass & steel
- Matt silver finish



115V - 240V dual shaver socket

Code	Description	W	K	LM	LM/W	Dimensions
13759	Spiegel Shaver Mirror	13.2W	3000/4000/6500	47	4	H: 600mm W: 500mm Proj: 42mm

BATHROOM MIRROR

GLIMPSE

Budget-friendly shaver mirror with pull cord


2YR
WARRANTY


CLASS 1


SMD


IP44
RATED


PULL
CORD


SHAVER
SOCKET

DUAL
SHAVER
SOCKET



- Constructed from mirrored glass & steel
- Matt silver finish



115V - 240V dual shaver socket

Code	Description	W	K	LM	LM/W	Dimensions
72360	Glimpse Shaver Mirror	7W	4000	185	26	H: 500mm W: 390mm Proj: 50mm

Order online www.saxbytrade.com

OMEGA

LED bathroom mirror combining style and function, complete with glass shelf



2YR
WARRANTY



CLASS 1



SMD



IP44
RATED



MOTION
SENSOR



SHAVER
SOCKET



DE- MIST
PAD

DUAL
SHAVER
SOCKET



- Constructed from mirrored glass & steel
- Matt silver finish



Omega shelf



115V - 240V dual shaver socket

Code	Description	W	K	LM	LM/W	Dimensions
39237	Omega Shaver Mirror	7.3W	6500	62	8	H: 500mm W: 390mm Proj: 150mm

BATHROOM MIRROR

REVELO

LED cabinet mirror, fully complete with two shelves


2YR
WARRANTY


CLASS 1


SMD


IP44
RATED


MOTION
SENSOR


SHAVER
SOCKET

DUAL
SHAVER
SOCKET



- Constructed from mirrored glass & steel
- Matt silver finish



115V - 240V dual shaver socket

Code	Description	W	K	LM	LM/W	Dimensions
60894	Revelo Shaver Cabinet Mirror	7W	6500	170	24	H: 600mm W: 650mm Proj: 105mm

Order online www.saxbytrade.com

REVAN

Practical LED cabinet mirror with up to 3 shelves

NEW
PRODUCT

238
LUMENS

- 2YR WARRANTY
- CLASS 1
- SMD
- IP44 RATED
- DE- MIST PAD
- USB A + C PORT



USB inside cabinet

- Constructed from aluminium & glass

Code	Description	W	K	LM	LM/W	Dimensions
120811	NEW Revan Cabinet Mirror	13W	3000/4000/6500	238	18	H: 600mm W: 400mm Proj: 140mm

BATHROOM MIRROR

MAKING THE MOST OF

SAXBYTRADE.COM



1400+
PRODUCTS



NO MINIMUM
ORDER VALUE



NEXT DAY DELIVERY
FROM STOCK



DELIVER DIRECT
TO SITE



ONLINE IMAGE
& DATA LIBRARY



NEW STOCK
ARRIVING DAILY



HUGE STOCK
HOLDING



EXPERT
SUPPORT TEAM



TECHNICAL SPEC
ACCESS



BRANCH
LOCATOR



ETHICAL &
QUALITY ASSURED



30 YEAR
EXPERIENCE



EXTERIOR

Our extensive range of outdoor lights contains everything from bollards to wall lights to decking lights - we have it all. Our products are suited for an array of budgets and offer practicality and functionality as well as style.

COLLECTION	235
WALL	257
BOLLARD	275
FLOODLIGHT	279
BULKHEAD	290
GUIDE	303
DECKING	313
GROUND	325
SPIKE	331



PUSH FIT
TERMINALS



IP65
RATED



DESIGNED FOR
LED LAMPS



PIR/PHOTOCELL
OPTIONS

SCOPE

Saxby's signature range of exterior wall lights

The Scope range combines clean design with practical functionality. Available as a single or up/down wall light, Scope features a combined PIR and photocell option for added convenience and energy efficiency. Finished in stainless steel or matt black and compatible with GU10 lamps, it's a smart choice for modern outdoor spaces.



LED
COMPATIBLE

**PIR/
PHOTOCELL**
SWITCHABLE



121030

121026



121031

121027



121033

121029



121032



121028

- Fully adjustable 3-2000 lux
- 120 detection angle
- Turn off/on twice within 6s can change from PIR to Photocell
- Turn off for more than 10s go back to PIR
- 8m maximum range with a 10±3 sec to 10±2 min timer function

Code	Description	Finish	Lamp	Dimensions
121026 NEW	Scope 1lt	Stainless steel	GU10 (required)	Proj: 93mm H: 94mm W: 60mm
121028 NEW	Scope 2lt	Stainless steel	2 x GU10 (required)	Proj: 93mm H: 162mm W: 60mm
121030 NEW	Scope 1lt	Matt black	GU10 (required)	Proj: 93mm H: 94mm W: 60mm
121032 NEW	Scope 2lt	Matt black	2 x GU10 (required)	Proj: 93mm H: 162mm W: 60mm
121027 NEW	Scope 1lt PIR/Photocell	Stainless steel	GU10 (required)	Proj: 99mm H: 149mm W: 69mm
121029 NEW	Scope 2lt PIR/Photocell	Stainless steel	2 x GU10 (required)	Proj: 99mm H: 215mm W: 69mm
121031 NEW	Scope 1lt PIR/Photocell	Matt black	GU10 (required)	Proj: 99mm H: 149mm W: 69mm
121033 NEW	Scope 2lt PIR/Photocell	Matt black	2 x GU10 (required)	Proj: 99mm H: 215mm W: 69mm



DESIGNED FOR
LED LAMPS



MULTIPLE OPTIONS
AVAILABLE



MULTIPLE
FINISHES



ANTI CORROSION
STAINLESS STEEL 304

PALIN

Stylish and modern exterior wall lights

The Palin range gives a stunning designer look at an affordable price. It boasts a variety of options such as wall and spotlights as well as PIR versions. Available in brushed stainless steel (304 & 316), white, black and anthracite grey finishes.



PALIN MARINE GRADE

Marine grade fittings suited to coastal environments

 **2YR**
WARRANTY

 **CLASS 1**

 **DIMMABLE**

 **IP65**
RATED

 **MARINE**
GRADE

LED
COMPATIBLE

MANUAL
OVERRIDE
PIR



101351

- Constructed from stainless steel (316) & glass
- PIR versions: built-in manual override PIR



101349

101350

101352

Code	Description	Finish	Lamp	Dimensions
101349	Palin 1lt Wall Marine Grade	Brushed stainless steel	GU10 (required)	Proj: 93mm H: 119mm W: 85mm
101350	Palin 2lt Wall Marine Grade	Brushed stainless steel	2 x GU10 (required)	Proj: 93mm H: 158mm W: 85mm
101351	Palin PIR 1lt Wall Marine Grade	Brushed stainless steel	GU10 (required)	Proj: 108mm H: 150mm W: 70mm
101352	Palin PIR 2lt Wall Marine Grade	Brushed stainless steel	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm

Order online www.saxbytrade.com

PALIN 1LT WALL & PIR

Stylish and modern exterior wall lights with a designer look

 **2YR**
WARRANTY

 **CLASS 1**

 **DIMMABLE**

 **IP44**
RATED

LED
COMPATIBLE

MANUAL
OVERRIDE
PIR



75431



75435



75442



75434



13801



75441



75099



77906

- Constructed from stainless steel (304) & glass
- PIR versions: built-in manual override PIR

Code	Description	Finish	Lamp	Dimensions
75431	Palin PIR 1lt Wall	Stainless steel	GU10 (required)	Proj: 108mm H: 150mm W: 70mm
75435	Palin PIR 1lt Wall	Black	GU10 (required)	Proj: 108mm H: 150mm W: 70mm
75442	Palin PIR 1lt Wall	White	GU10 (required)	Proj: 108mm H: 150mm W: 70mm
75099	Palin PIR 1lt Wall	Anthracite grey	GU10 (required)	Proj: 108mm H: 150mm W: 70mm
13801	Palin 1lt Wall	Stainless steel	GU10 (required)	Proj: 94mm H: 119mm W: 85mm
75434	Palin 1lt Wall	Black	GU10 (required)	Proj: 94mm H: 119mm W: 85mm
75441	Palin 1lt Wall	White	GU10 (required)	Proj: 94mm H: 119mm W: 85mm
77906	Palin 1lt Wall	Anthracite grey	GU10 (required)	Proj: 94mm H: 119mm W: 85mm

EXTERIOR COLLECTION

PALIN 2LT WALL & PIR

Stylish and modern exterior wall lights with a designer look


2YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED

LED
COMPATIBLE

MANUAL
OVERRIDE
PIR



75430



75432

- Constructed from stainless steel (304) & glass
- PIR versions: built-in manual override PIR



13802



94792



75439



75433



94793



75440

Code	Description	Finish	Lamp	Dimensions
75433	Palin PIR 2lt Wall	Black	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm
75430	Palin PIR 2lt Wall	Stainless steel	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm
94793	Palin PIR 2lt Wall	Anthracite grey	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm
75440	Palin PIR 2lt Wall	White	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm
13802	Palin 2lt Wall	Stainless steel	2 x GU10 (required)	Proj: 94mm H: 158mm W: 85mm
75432	Palin 2lt Wall	Black	2 x GU10 (required)	Proj: 94mm H: 158mm W: 85mm
75439	Palin 2lt Wall	White	2 x GU10 (required)	Proj: 94mm H: 158mm W: 85mm
94792	Palin 2lt Wall	Anthracite grey	2 x GU10 (required)	Proj: 94mm H: 158mm W: 85mm

Order online www.saxbytrade.com

PALIN 2LT WALL PHOTOCELL

Stylish and modern exterior wall lights with a designer look


2YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED

LED
COMPATIBLE

PHOTOCELL



78415



95555



90130

- Constructed from stainless steel (304) & glass
- Complete with built in Photocell! 10±5 lux ON ,30±10lux off

Code	Description	Finish	Lamp	Dimensions
78415	Palin Photocell 2lt Wall	Anthracite grey	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm
95555	Palin Photocell 2lt Wall	Black	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm
90130	Palin Photocell 2lt Wall	Stainless steel	2 x GU10 (required)	Proj: 108mm H: 210mm W: 70mm

EXTERIOR COLLECTION

PALIN SPIKE

Stylish and modern exterior range with a designer look


2YR
WARRANTY


CLASS 1



DIMMABLE


IP44
RATED


100°
TILT

LED
COMPATIBLE

3M
PRE WIRED
CABLE

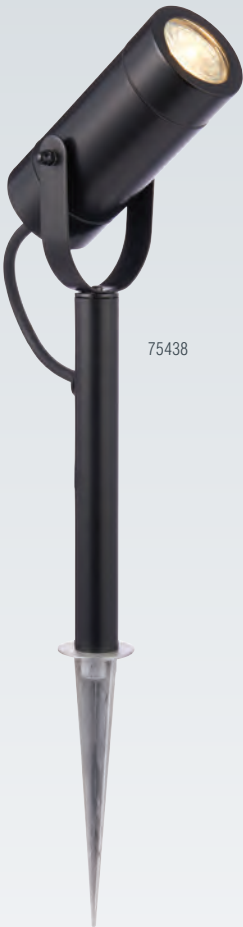

75438

13914



- Constructed from stainless steel (304) & glass

Code	Description	Finish	Lamp	Dimensions
13914	Palin 310mm Spike	Stainless steel	GU10 (required)	H: 365mm W: 92mm D: 170mm
75438	Palin 310mm Spike	Black	GU10 (required)	H: 365mm W: 92mm D: 170mm

Order online www.saxbytrade.com

PALIN ADJUSTABLE WALL SPOT

Stylish and modern exterior wall lights with a designer look



LED
COMPATIBLE



75448



75444



75449



75437



78417



75443



75436



78416

- Constructed from stainless steel (304) & glass

Code	Description	Finish	Lamp	Dimensions
75448	Palin Wall Spot	Stainless steel	GU10 (required)	Proj: 160mm Dia: 85mm H: 148mm
75436	Palin Wall Spot	Black	GU10 (required)	Proj: 160mm Dia: 85mm H: 148mm
75443	Palin Wall Spot	White	GU10 (required)	Proj: 160mm Dia: 85mm H: 148mm
78416	Palin Wall Spot	Anthracite grey	GU10 (required)	Proj: 160mm Dia: 85mm H: 148mm
75449	Palin 2lt Wall Spot	Stainless steel	2 x GU10 (required)	Proj: 165mm W: 220mm H: 125mm
75437	Palin 2lt Wall Spot	Black	2 x GU10 (required)	Proj: 165mm W: 220mm H: 125mm
75444	Palin 2lt Wall Spot	White	2 x GU10 (required)	Proj: 165mm W: 220mm H: 125mm
78417	Palin 2lt Wall Spot	Anthracite grey	2 x GU10 (required)	Proj: 165mm W: 220mm H: 125mm

EXTERIOR COLLECTION

PALIN XL

Stylish and modern exterior wall lights with a designer look


2YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED

LED
COMPATIBLE



- Brushed stainless steel & clear glass
- Constructed from stainless steel (304) & glass

Code	Description	Finish	Lamp	Dimensions
98437	Palin XL	Stainless steel	2 x GU10 (required)	Proj: 106mm H: 206mm W: 76mm
98438	Palin XL	Black	2 x GU10 (required)	Proj: 106mm H: 206mm W: 76mm

Order online www.saxbytrade.com

ATLANTIS

Marine grade fittings suited to coastal or industrial environments


2YR
WARRANTY


CLASS 1


DIMMABLE


MARINE
GRADE

MANUAL
OVERRIDE
PIR


14017


73446


14016


75429


73445


14015

- Constructed from marine grade stainless steel (316L) & glass
- PIR versions: complete with built-in manual override PIR

Code	Description	Lamp	Dimensions
14016	Atlantis 1lt Wall	 GU10 (required)	Proj: 96mm H: 108mm W: 78mm
14015	Atlantis 2lt Wall	 2 x GU10 (required)	Proj: 96mm H: 175mm W: 78mm
75429	Atlantis PIR 1lt Wall	 GU10 (required)	Proj: 96mm H: 152mm W: 69mm
73445	Atlantis PIR 2lt Wall	 2 x GU10 (required)	Proj: 109mm H: 219mm W: 69mm
14017	Atlantis 1lt Wall Spot	 GU10 (required)	Proj: 150mm Dia: 78mm H: 133mm
73446	Atlantis 2lt Wall Spot	 2 x GU10 (required)	Proj: 149mm Dia: 121mm H: 152.5mm

EXTERIOR COLLECTION

244

ATLANTIS

Marine grade fittings suited to coastal or industrial environments



- Constructed from marine grade stainless steel (316L) & glass

Code	Description	Lamp	Dimensions
14018	Atlantis Spike	GU10 (required)	H: 315mm Dia: 63mm
70847	Atlantis 280mm Post	2 x GU10 (required)	H: 280mm W: 193mm D: 105mm
70848	Atlantis 450mm Post	2 x GU10 (required)	H: 450mm W: 193mm D: 105mm

Order online www.saxbytrade.com

ODYSSEY

Premium range of exterior wall fittings with PIR options

 **2YR**
WARRANTY

 **CLASS 1**

 **DIMMABLE**

 **IP65**
RATED

LED
COMPATIBLE

**MANUAL
OVERRIDE
PIR**

97821



97822



ST5009SS



ST5009BK



ST5008S



ST5008BK



ST5010S



78667

- Constructed from stainless steel (304) or aluminium alloy & glass

Code	Description	Finish	Lamp	Dimensions
97821	Odyssey PIR 2lt Wall	Brushed stainless steel	GU10 (required)	Proj: 109mm H: 217mm W: 69mm
97822	Odyssey PIR 2lt Wall	Satin black	GU10 (required)	Proj: 109mm H: 210mm W: 69mm
ST5009SS	Odyssey 1lt Wall	Brushed stainless steel	GU10 (required)	Proj: 96mm H: 108mm W: 78mm
ST5009BK	Odyssey 1lt Wall	Satin black	GU10 (required)	Proj: 99.5mm H: 112mm W: 78mm
ST5008S	Odyssey 2lt Wall	Brushed stainless steel	GU10 (required)	Proj: 96mm H: 175mm W: 78mm
ST5008BK	Odyssey 2lt Wall	Satin black	GU10 (required)	Proj: 99.5mm H: 157mm W: 78mm
ST5010S	Odyssey 1lt Wall Spot	Brushed stainless steel	GU10 (required)	Proj: 150mm Dia: 78mm W: 133mm
78667	Odyssey 1lt Wall Spot	Satin black	GU10 (required)	Proj: 158mm Dia: 78mm W: 137mm

EXTERIOR COLLECTION

ODYSSEY SPIKE

Premium range of spike lights


2YR
WARRANTY


CLASS 1


DIMMABLE


IP65
RATED

LED
COMPATIBLE

3M
PRE WIRED
CABLE



- Constructed from stainless steel (304) & glass

Code	Description	Finish	Lamp	Dimensions
98442	Odyssey Spike	Satin black	GU10 (required)	H: 318mm Dia: 63mm
ST5011	Odyssey Spike	Brushed stainless steel	GU10 (required)	H: 314.5mm Dia: 63mm

Order online www.saxbytrade.com

ICARUS

Hard wearing, impact resistant exterior wall lights



81011



- Black polypropylene & clear polycarbonate finish
- PIR versions: built-in manual override PIR
- Suitable for locations in or near marine environments

81008



81010



81009




Code	Description	Finish	Lamp	Dimensions
81008	Icarus 1lt Wall	Black	GU10 (required)	Proj: 89mm H: 122mm W: 80mm
81010	Icarus PIR 1lt Wall	Black	GU10 (required)	Proj: 95mm H: 152mm W: 71mm
81009	Icarus 2lt Wall	Black	2 x GU10 (required)	Proj: 86mm H: 160mm W: 80mm
81011	Icarus PIR 2lt Wall	Black	2 x GU10 (required)	Proj: 95mm H: 212mm W: 71mm

EXTERIOR COLLECTION



STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

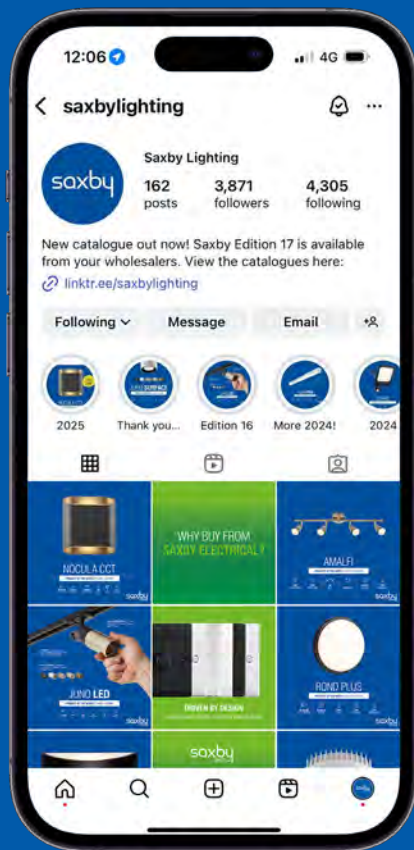

Follow us on Facebook,
X, Instagram and LinkedIn





- Constructed from marine grade stainless steel (316L) & polycarbonate
- E27 lamps must have a diameter of 55mm or less to use in this product

- We recommend to use with Lamp: 113969 (Additional spec can be found on page 365)

Code	Description	Lamp	Dimensions
49909	Equinox 1lt Wall	E27 Stick (required)	Proj: 178mm H: 295mm W: 116mm
49910	Equinox Post	E27 Stick (required)	H: 500mm Dia: 156mm
49911	Equinox Bollard	E27 Stick (required)	H: 800mm Dia: 156mm
119098	NEW Equinox 1m Bollard	E27 Stick (required)	H: 1000mm Dia: 156mm
119345	NEW Equinox & Roko Root Kit	-	-

TANGO

Contemporary collection of exterior fittings


2YR
WARRANTY


CLASS 1


IP44
RATED

LED
COMPATIBLE

MANUAL
OVERRIDE
PIR



- Constructed from stainless steel (304) & polycarbonate

- We recommend to use with Lamp: 113969 (Additional spec can be found on page 365)

Code	Description	Lamp	Dimensions
13921	Tango 1lt Wall	E27 (required)	Proj: 160mm H: 260mm W: 102mm
92532	Tango PIR 1lt Wall	E27 (required)	Proj: 160mm H: 269mm W: 102mm
13922	Tango Post	E27 (required)	H: 450mm Dia: 138mm
13923	Tango Bollard	E27 (required)	H: 800mm Dia: 138mm
81012	Tango Bollard 1m	E27 (required)	H: 1000mm Dia: 138mm
81013	Tango & Bliss Root Kit	-	H: 160mm Dia: 121mm

EXTERIOR COLLECTION


2YR
WARRANTY


CLASS 1


IP44
RATED

LED
COMPATIBLE



- Constructed from stainless steel (304) & polycarbonate

- We recommend to use with Lamp: 113969 (Additional spec can be found on page 365)

Code	Description	Lamp	Dimensions
13798	Bliss 1lt Wall	E27 (required)	Proj: 170mm H: 220mm W: 100mm
92531	Bliss Post	E27 (required)	H: 500mm Dia: 140mm
13799	Bliss Bollard	E27 (required)	H: 800mm Dia: 140mm
81013	Bliss & Tango Root Kit	-	H: 160mm Dia: 121mm

ROKO

Marine grade fittings suited to coastal or industrial environments



2YR
WARRANTY



CLASS 1



IP44
RATED



MARINE
GRADE

LED
COMPATIBLE



67701



67702



67703



67704



- Constructed from marine grade stainless steel (316) & polycarbonate

Code	Description	Lamp	Dimensions
67701	Roko 1lt Wall	GU10 (required)	Proj: 195mm H: 228mm W: 160mm
67702	Roko PIR 1lt Wall	GU10 (required)	Proj: 195mm H: 238mm W: 160mm
67703	Roko Post	GU10 (required)	H: 500mm Dia: 160mm
67704	Roko Bollard	GU10 (required)	H: 1000mm Dia: 160mm
119345	NEW Roko & Equinox Root Kit	-	-

EXTERIOR COLLECTION

High quality exterior LED lighting, matching range items available

3YR
WARRANTY

CLASS 1

SMD

IP44
RATED

UP TO
320
LUMENS

MANUAL
OVERRIDE
PIR

92533

92534

13929

13928

• Constructed from stainless steel (304) & polycarbonate

Code	Description	W	K	LM	LM/W	Dimensions
13928	Pyramid 1lt Wall	4.3W	6500	300	70	Proj: 130mm H: 145mm W: 85mm
92533	Pyramid PIR 1lt Wall	4.3W	6500	320	74	Proj: 130mm H: 165mm W: 85mm
13929	Pyramid Post	4.3W	6500	320	74	H: 500mm Dia: 118mm
92534	Pyramid Bollard	4.3W	6500	300	70	H: 800mm Dia: 118mm

TRIBECA CCT

Premium collection of robust fittings


3YR
WARRANTY


CLASS 1


SMD


IP54
RATED

300
LUMENS



EL-40074



113478

- Constructed from die cast aluminium alloy & frosted acrylic
- Textured grey finish

EL-40076



EL-40075



Code	Description	W	K	LM	LM/W	Dimensions
EL-40074	Tribeca CCT 1lt Wall	8W	3000/4000/6000	300	38	Proj: 165.5mm H: 200mm W: 129mm
EL-40075	Tribeca CCT Post	8W	3000/4000/6000	300	38	H: 500mm W: 127mm D: 125mm
EL-40076	Tribeca CCT Bollard	8W	3000/4000/6000	300	38	H: 800mm W: 127mm D: 125mm
113478	Tribeca CCT Root Kit	-	-	-	-	H: 150mm D: 87mm

EXTERIOR COLLECTION

 **2YR**
WARRANTY

 **CLASS 1**

 **DIMMABLE**


 **IP44**
RATED

PIR
OPTION

98439



99756



- Constructed from stainless steel (304) & polycarbonate
- Complete with built in manual override PIR

Code	Description	Lamp	Dimensions
98439	Hayden Wall	E27 (required)	Proj: 136mm H: 230mm W: 89mm
99756	Hayden PIR	 E27 (required)	Proj: 145mm H: 262mm W: 89mm

SENTINEL CCT

Versatile outdoor security light


3YR
WARRANTY


CLASS 1


SMD


IP44
RATED


PHOTOCELL
SENSOR


PIR
SENSOR

1500
LUMENS



- Constructed from black PC & die cast aluminium alloy
- 180° detection angle, 12m maximum range with a 10±5 sec - 4± 1 min timer function plus daylight function

Code	Description	W	K	LM	LM/W	Dimensions
75272	Sentinel CCT	2 x 10W	3000/4000/6000	1500	75	Proj: 147mm H: 164mm W: 195mm

EXTERIOR WALL


CLASS 2


IP54
RATED

450
LUMENS

PIR
OPTION



75930

75931



- Constructed from stainless steel (304) & polypropylene

Code	Description	Lamp	K	LM	LM/W	Dimensions
75930	Bianco LED CCT PIR 1lt Wall	 7.5W LED module (SMD)	3000/4000/6000	450	60	Proj: 91mm H: 265mm W: 213mm
75931	Bianco LED CCT PIR 1lt Wall	 7.5W LED module (SMD)	3000/4000/6000	450	60	Proj: 103mm H: 265mm W: 213mm
ST031F	Bianco 1lt Wall IP44	 E27 GLS (required)	-	-	-	Proj: 91mm H: 291mm W: 216mm
ST031FPIR	Bianco PIR 1lt Wall IP44	 E27 GLS (required)	-	-	-	Proj: 92mm H: 300mm W: 216mm





UP TO
950
LUMENS

PIR
OPTION

67686



67685



67687



- Constructed from die cast aluminium alloy & clear glass
- Textured dark matt anthracite finish
- All use SMD apart from 67687 which uses COB

Code	Description	W	K	LM	LM/W	Dimensions
67685	Morti Single	11W	4000	950	86	Proj: 64mm H: 102mm W: 85mm
67686	Morti PIR	11W	4000	950	86	Proj: 64mm H: 151mm W: 85mm
67687	Morti Twin CCT	10.5W	3000/4000/6500	640	61	Proj: 57mm H: 162mm W: 90mm

NOCULA CCT

Sturdy, stylish and modern up/down wall light



3YR
WARRANTY



CLASS 1



COB



IP54
RATED



5
SDCM

770
LUMENS





3000K



4000K



6500K

- Constructed from die cast aluminium alloy & clear glass
- Matt black finish

Code	Description	W	K	LM	LM/W	Dimensions
114574	Nocula CCT	2 x 5W	3000/4000/6500	770	77	Proj: 63.7mm H: 180mm W: 160mm

EXTERIOR WALL

262

VULCAN CCT

Die cast aluminium wall fitting; horizontal and vertical mounting options


3YR
WARRANTY


CLASS 1


COB


IP65
RATED


IK08
RATED


120°
BEAM

UP TO
880
LUMENS



- Constructed from die cast aluminium alloy & opal polycarbonate
- Textured matt white/black finish

Code	Description	Finish	W	K	LM	LM/W	Dimensions
61865	Vulcan 1lt Wall	Matt black	12.5W	3000/4000/6500	760	61	Proj: 98mm H: 120mm W: 300mm
61866	Vulcan 1lt Wall	Matt white	12.5W	3000/4000/6500	880	70	Proj: 98mm H: 120mm W: 300mm

Order online www.saxbytrade.com

GLOVER CCT

Stylish outdoor collection with adjustable beam angle

NEW
OPTIONS


3YR
WARRANTY


CLASS 1

UP TO
950
LUMENS



- Constructed from aluminium alloy & clear glass
- All use SMD apart from 120349 which uses COB
- Textured black finish



Code	Description		K	LM	LM/W	Dimensions
97824	Glover CCT Square	 IP44	3000/4000/6500	610	55	H: 100mm W: 100mm D: 100mm
79196	Glover CCT Rectangular	 IP44	3000/4000/6500	610	55	Proj: 72.7mm H: 150mm W: 71.5mm
120374 NEW	Glover CCT Twin	 IP65	3000/4000/6500	950	48	Proj: 100mm H: 100mm W: 200mm
120810 NEW	Glover CCT Square PIR/Photocell	 IP54	3000/4000/6500	610	61	Proj: 102mm H: 151mm W: 100mm
120349 NEW	Glover CCT Bollard	 IP65	3000/4000/6500	300	33	H: 800mm W: 153mm D: 143mm

EXTERIOR WALL



WARE

Corner wall lights to transform any wall or entrance


2YR
WARRANTY


CLASS 2


DIMMABLE


IP44
RATED

CORNER
MOUNT



- Constructed from polycarbonate & glass

Code	Description	Lamp	Finish	Dimensions
EL-40088	Ware 1lt Wall	E27 GLS (required)	Black pc & white glass	Proj: 255mm H: 207mm W: 162.5mm

EXTERIOR WALL

NEW
OPTION

BRETON

Contemporary box style wall light with outer glass


3YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED

PIR
OPTION



- Constructed from stainless steel (304) & glass
- PIR version: built in manual override PIR
- 10 lux - 2000 lux. 110° detection angle, 12m maximum range with a 5 sec - 5 min timer function

Code	Description	Finish	Lamp	Dimensions
78757	Breton 1lt Wall	Matt black	E27 GLS (required)	Proj: 112mm H: 238mm W: 116mm
94348	Breton PIR	Matt black	E27 GLS (required)	Proj: 112mm H: 238mm W: 120mm
118838	NEW Breton Twin	Matt black	2 x E27 (required)	Proj: 112mm H: 238mm W: 181mm

Order online www.saxbytrade.com


2YR
WARRANTY


CLASS 1


IP44
RATED

PIR
OPTION

4479782



4478182



- Constructed from stainless steel (304) & polycarbonate
- PIR version: 110° detection angle 8m maximum range min 5 sec - 5 min timer function

Code	Description	Lamp	Dimensions
4478182	York 1lt Wall	E27 GLS (required)	Proj: 238mm H: 340mm W: 210mm
4479782	York PIR 1lt Wall	 E27 GLS (required)	Proj: 240mm H: 365mm W: 210mm

INOVA PIR

Exterior wall light suitable for lighting paths and doorways


2YR
WARRANTY


CLASS 1


IP44
RATED


PIR
SENSOR

PIR



- Constructed from stainless steel (304) & polycarbonate
- 110° detection angle, 8m maximum range with a 5 sec - 5 min timer function

Code	Description	Finish	Lamp	Dimensions
49945	Inova PIR 1lt Wall	Brushed stainless steel	E27 GLS (required)	Proj: 255mm H: 380mm W: 240mm
49946	Inova PIR 1lt Wall	Matt black	E27 GLS (required)	Proj: 255mm H: 380mm W: 240mm

Order online www.saxbytrade.com

PAGODA PIR

Exterior wall light designed for any modern environment


2YR
WARRANTY


CLASS 1


IP44
RATED


PIR
SENSOR


PHOTOCELL
SENSOR

PIR/
PHOTOCELL



- Constructed from stainless steel (304) & polycarbonate
- 10 lux on, 10 lux off. 110° detection angle, 8m maximum range with a 5 sec - 5 min timer function
- 12 x 0.05W cool white LED capsules included

Code	Description	Lamp	Dimensions
13924	Pagoda PIR 1lt Wall	E27 (required) & 12 x 0.05W LED (included)	Proj: 215mm H: 335mm W: 170mm

EXTERIOR WALL

TRADITIONAL

Robust die cast exterior wall light; standard and PIR options available


2YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED

PIR
OPTION



1818S

- Constructed from die cast aluminium alloy & polycarbonate
- Satin black finish
- Maximum 15W LED lamp required
- PIR version: 120° detection angle, 8m maximum range with a 5 sec - 8 min timer function

1818PIR



Code	Description	Lamp	Dimensions
1818S	Traditional Half Lantern	E27 GLS (required)	Proj: 126mm H: 400mm W: 215mm
1818PIR	Traditional PIR Half Lantern	E27 GLS (required)	Proj: 126mm H: 400mm W: 215mm

Order online www.saxbytrade.com

HALBURY PIR

Traditional outdoor wall light in a choice of finishes


3YR
WARRANTY


CLASS 2


SMD


IP44
RATED


IK08
RATED

500
LUMENS

PIR



- Frosted polycarbonate
- 20 lux on 2000 lux off
- 130° detection angle 8 maximum range with a 5 sec - 5 min timer function

Code	Description	Finish	W	K	LM	LM/W	Dimensions
54554	Halbury PIR 1lt Wall	Matt white	7W	4000	500	71	Proj: 98mm H: 365.5mm W: 180mm
54553	Halbury PIR 1lt Wall	Matt black	7W	4000	500	71	Proj: 98mm H: 365.5mm W: 180mm

EXTERIOR WALL

NEW
PRODUCT

EVESHAM

Practical and traditional wall light


3YR
WARRANTY


CLASS 2


SMD


IP44
RATED

UP TO
500
LUMENS

PIR
OPTION



- Constructed from polycarbonate

Code	Description	Finish	W	K	LM	LM/W	Dimensions
78617	NEW Evesham Wall	Matt black	7W	3000/4000/6000	500	71	Proj: 230mm H: 380mm W: 170mm
54555	NEW Evesham Wall PIR	Matt black	7W	4000	400	57	Proj: 230mm H: 380mm W: 170mm

Order online www.saxbytrade.com

BAYSWATER

Coach lantern with versatile mounting options


2YR
WARRANTY


CLASS 2


DIMMABLE


IP44
RATED

TWO
MOUNT
OPTIONS

LED
COMPATIBLE



- Constructed from polypropylene & glass



Can be mounted up or down

Code	Description	Finish	Lamp	Dimensions
40045	Bayswater 1lt Wall	Black	E27 GLS (required)	Proj: 212mm H: 356mm W: 171mm

EXTERIOR WALL



2YR
WARRANTY



CLASS 1



DIMMABLE



IP44
RATED

LED
COMPATIBLE



- Constructed from die cast aluminium alloy & polycarbonate
- Matt black finish
- Photocell version: 50 ± 10 lux on, 100 ± 10 lux off

Code	Description	Lamp	Dimensions
CH200E27BK	Louvre Bollard	E27 GLS (required)	H: 1000mm Dia: 170mm
97853	Louvre Photocell Bollard	E27 GLS (required)	H: 1000mm Dia: 170mm
119100	NEW Louvre PIR Bollard	E27 GLS (required)	H: 1000mm Dia: 170mm
CH201E27BK	Louvre Post	E27 GLS (required)	H: 650mm Dia: 170mm
81014	Louvre Root Kit	-	H: 155mm Dia: 143mm

DAX CCT

Robust die cast exterior bollard using the latest in colour changing technology


5YR
WARRANTY


CLASS 1


SMD


IP65
RATED


IK08
RATED


1350
LUMENS



- Constructed from die cast aluminium alloy & polycarbonate
- Textured black finish



Root kit included

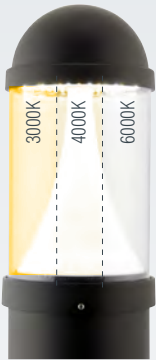

CCT switchable

Code	Description	W	K	LM	LM/W	Dimensions
92310	Dax CCT Bollard	20W	3000/4000/6000	1350	68	H: 1000mm Dia: 181mm

EXTERIOR BOLLARD

High quality professional bollard suitable for commercial use



13822



119099



Root kit

- Constructed from die cast aluminium alloy & polycarbonate

Code	Description	Finish	Lamp	Dimensions
13822	Zone Bollard	Textured black	E27 (required)	H: 980mm Dia: 170mm
119099	NEW Zone Bollard Photocell	 Textured black	E27 (required)	H: 980mm Dia: 170mm
80775	Zone Root Kit	-	-	H: 150mm Dia: 134mm



MULTI-WATTAGES
AVAILABLE



**PLUG
AND PLAY**



**IP65
RATED**



SENSORS
AVAILABLE

SALDE

All in one floodlight solution

The Salde LED floodlight is Saxby's signature range. Its unique design offers stand-alone floodlight installation or optional Plug & Play PIR, photocell and microwave sensors controls – all with an IP65 rating. The front lens has a prismatic centre for enhanced LED lighting control. A truly professional range offering mix and match options to cover all types of installations.


3YR
WARRANTY


CLASS 1


SMD


IP65
RATED

UP TO
4000
LUMENS

0.8M
PRE WIRED
CABLE

CCT
FROM 2026



- Plug & Play accessories available (PIR, Microwave sensor, Photocell)
- Angled mounting bracket
- Driverless AC-LED technology

Code	Description	Finish	W	K	LM	LM/W	Dimensions
91860	Salde	Matt black	10W	4000	800	80	Proj: 32mm H: 173mm W: 105mm
91861	Salde	Matt black	20W	4000	1600	80	Proj: 33mm H: 186mm W: 126mm
91862	Salde	Matt black	30W	4000	2400	80	Proj: 32mm H: 206mm W: 155mm
91863	Salde	Matt black	50W	4000	4000	80	Proj: 32mm H: 235mm W: 209mm

SALDE

Complete floodlight solution with plug and play sensor options


3YR
WARRANTY


CLASS 1


SMD


IP65
RATED

UP TO
4000
LUMENS

0.8M
PRE WIRED
CABLE

CCT
FROM 2026



- Plug & Play accessories available (PIR, Microwave sensor, Photocell)
- Angled mounting bracket
- Driverless AC-LED technology

Code	Description	Finish	W	K	LM	LM/W	Dimensions
98443	Salde	Matt white	10W	4000	800	80	Proj: 32mm H: 173mm W: 105mm
98444	Salde	Matt white	20W	4000	1600	80	Proj: 33mm H: 186mm W: 126mm
98445	Salde	Matt white	30W	4000	2400	80	Proj: 32mm H: 206mm W: 155mm
98446	Salde	Matt white	50W	4000	4000	80	Proj: 32mm H: 235mm W: 209mm

EXTERIOR FLOODLIGHT

SALDE ACCESSORIES

Plug and play accessories, with an IP65 rating


3YR
WARRANTY

IP65
RATED


MANUAL
OVERRIDE
PIR




78970



Remove cap



Remove pin



Add sensor

Code	Description	Finish	Dimensions
98447	Salde PIR Accessory	Matt white	Proj: 49.8mm H: 75mm W: 64mm
91864	Salde PIR Accessory	Matt black	Proj: 49.8mm H: 75mm W: 64mm
91865	Salde MW Accessory	Matt black	Proj: 46.3mm H: 75mm W: 64mm
91866	Salde Photocell Accessory	Matt black	Proj: 46.3mm H: 75mm W: 64mm
78970	Earth Spike	Matt black	H: 170mm Dia: 45mm

Order online www.saxbytrade.com

SALDE TWIN SPOT CCT

Complete security solution with plug and play sensor options


3YR
WARRANTY


CLASS 1


COB


IP54
RATED


90°
TILT

1800
LUMENS



91864



91865




91866



Code	Description	Finish	W	K	LM	LM/W	Dimensions
99544	Salde Twin Spot CCT	Matt black	2 x 10W	3000/4000/6000	1800	90	Proj: 175mm H: 137mm W: 215mm
91864	Salde PIR Accessory	Matt black	-	-	-	-	Proj: 49.8mm H: 75mm W: 64mm
91865	Salde MW Accessory	Matt black	-	-	-	-	Proj: 46.3mm H: 75mm W: 64mm
91866	Salde Photocell Accessory	Matt black	-	-	-	-	Proj: 46.3mm H: 75mm W: 64mm

EXTERIOR FLOODLIGHT

STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

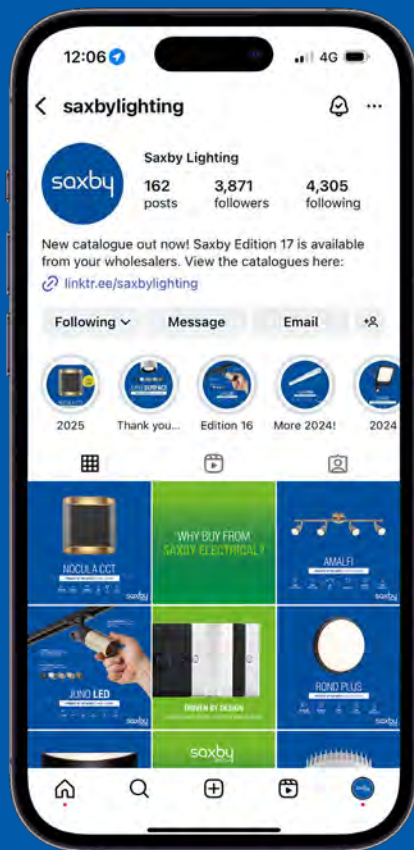

Follow us on Facebook,
X, Instagram and LinkedIn





MULTI WATTAGES
AVAILABLE



PREMIUM
CONSTRUCTION



IP65
RATED



PIR OPTIONS
AVAILABLE

GUARD

Saxby's signature floodlight solution with PIR options

Introducing Guard: the signature floodlight solution from Saxby. Crafted with precision and passion, the Guard floodlights redefine outdoor lighting, ensuring safety, security, and stunning aesthetics. With a wide-angle beam that effortlessly bathes your space in radiant light, the Guard floodlights eliminate shadows and dark corners, providing comprehensive coverage that leaves no place for darkness to hide.

STYLE MEETS SECURITY

From 10W - 200W. Suitable for all applications.



PREMIUM CONSTRUCTION

Constructed from diecast aluminium housing.

WEATHER RESISTANT

IP65 rated against dust & moisture.

BREATHER GLAND

The breather gland helps to avoid condensation build up (200W only).

GUARD

Saxby's signature floodlight solution



3YR
WARRANTY



CLASS 1



SMD



IP65
RATED



IK08
RATED

UP TO
18000
LUMENS

ANGLED
BRACKET

0.8M
PRE WIRED
CABLE



107635



- Matt black finish

107632

107633

107634

107636

107637

107638

Code	Description	W	K	LM	LM/W	Dimensions
107632	Guard	10W	4000	900	90	Proj: 21.3mm H: 106.3mm W: 97.4mm
107633	Guard	20W	4000	1800	90	Proj: 22.8mm H: 126.2mm W: 121.3mm
107634	Guard	30W	4000	2700	90	Proj: 31.4mm H: 165mm W: 154mm
107635	Guard	50W	4000	4500	90	Proj: 31.8mm H: 200.9mm W: 182.8mm
107636	Guard	100W	4000	9000	90	Proj: 33mm H: 239.3mm W: 216.5mm
107637	Guard	150W	4000	13500	90	Proj: 33.1mm H: 272.5mm W: 249.4mm
107638	Guard	200W	4000	18000	90	Proj: 33.1mm H: 313.5mm W: 283.7mm

EXTERIOR FLOODLIGHT

GUARD PIR OVERRIDE

Saxby's signature floodlight solution


3YR
WARRANTY


CLASS 1


SMD


IP65
RATED


IK08
RATED

UP TO
9000
LUMENS

ANGLED
BRACKET

0.8M
PRE WIRED
CABLE

MANUAL
OVERRIDE
PIR



108675

- Matt black finish



108672

108673

108674

108601

Code	Description	W	K	LM	LM/W	Dimensions
108672	Guard PIR	10W	4000	900	90	Proj: 54.1mm H: 168.6mm W: 94.7mm
108673	Guard PIR	20W	4000	1800	90	Proj: 54.1mm H: 189.9mm W: 121.3mm
108674	Guard PIR	30W	4000	2700	90	Proj: 55.2mm H: 227.5mm W: 154mm
108675	Guard PIR	50W	4000	4500	90	Proj: 57mm H: 262.6mm W: 182.3mm
108601	Guard PIR	100W	4000	9000	90	Proj: 57mm H: 262.6mm W: 182.3mm

Order online www.saxbytrade.com



3K/4K/6.5K
CCT SWITCH



ASYMMETRIC
BEAM



PREMIUM
CONSTRUCTION



IK10
RATED

FORTIS

Powerful range of asymmetric floodlights

The Fortis LED Floodlight range delivers outstanding performance with a powerful lumen output of up to 24000 at an impressive 120lm/W. Designed with precision asymmetric optics, Fortis provides targeted, efficient illumination exactly where it's needed, reducing wasted light and glare. Each unit comes pre-wired with 0.8m of cable and includes an angled bracket for fast, hassle-free installation. A convenient CCT switch lets you easily adjust the colour temperature between 3000K, 4000K & 6500K at the flick of a switch to suit your space. It's IK10 impact resistant and IP65 weatherproof, ensuring long-lasting reliability in all environments.



UP TO
24000
LUMENS

120
LM/W

0.8M
PRE WIRED
CABLE

ANGLED
BRACKET



118608

- Constructed from die cast aluminium alloy & polycarbonate
- Matt black & clear pc
- Complete with integrated control gear



118609



118610

Code	Description	W	K	LM	LM/W	Dimensions
118608 NEW	Fortis	100W	3000/4000/6500	12000	120	Proj: 36mm H: 263mm W: 227mm
118609 NEW	Fortis	150W	3000/4000/6500	18000	120	Proj: 38mm H: 302mm W: 263mm
118610 NEW	Fortis	200W	3000/4000/6500	24000	120	Proj: 39mm H: 346mm W: 285mm

MOTION PIR

Tough, vandal resistant security PIR bulkhead in LED and non-LED options


5YR
WARRANTY


CLASS 1


SMD


IP44
RATED


PIR
SENSOR

600
LUMENS

PIR
OVERRIDE



- Constructed from polycarbonate
- 120° detection angle 10m maximum range with a 5 sec - 5 min timer function
- Proj: 112mm H: 276mm W: 113mm

Code	Description	Finish	W	Lamp	K	LM	LM/W
73717	Motion LED CCT PIR 1lt Wall	Gloss white	6W	-	3000/4000/6000	600	100
73716	Motion LED CCT PIR 1lt Wall	Black	6W	-	3000/4000/6000	600	100
48740	Motion PIR 1lt Wall	 Gloss white	-	E27 (required)	-	-	-
48739	Motion PIR 1lt Wall	 Black	-	E27 (required)	-	-	-

EXTERIOR BULKHEAD






LUIK

Tough & robust bulkhead with customisable options

The Luik is a tough and robust bulkhead luminaire, constructed from die-cast aluminium with a durable powder coating finish and a polycarbonate diffuser. The light fitting also benefits from an IP65 rating and an IK10 impact rating. Easy to install, available in plain, eyelid and grill bezel, with options of emergency and microwave sensor. The Luik is ideally suited for public buildings, car parks, industrial facilities, in both exterior and interior applications. Available in a choice of finishes.

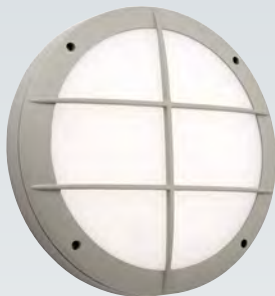

- Die cast aluminium alloy & polycarbonate

CREATE YOUR PERFECT LUIK BULKHEAD

- Firstly choose your style and colour from our plain, eyelid and grill options, which are available in black, white or grey.
- Then pick your gear tray, the options are standard, microwave, emergency or microwave emergency.

1. Select your casing style & colour...

Code	Description	Finish	Complete Product Lumen	Dimensions
61646	Luik Plain Casing	Black	1210	Proj: 64mm Dia: 359mm
61648	Luik Eyelid Casing	Black	770	Proj: 68mm Dia: 359mm
61650	Luik Grill Casing	Black	1010	Proj: 74mm Dia: 359mm
61647	Luik Plain Casing	Grey	1210	Proj: 64mm Dia: 359mm
61649	Luik Eyelid Casing	Grey	770	Proj: 68mm Dia: 359mm
61651	Luik Grill Casing	Grey	1010	Proj: 74mm Dia: 359mm
69231	Luik Plain Casing	White	1210	Proj: 64mm Dia: 359mm
69232	Luik Eyelid Casing	White	770	Proj: 68mm Dia: 359mm

2. Now select your tray...

Code	Description	W	K	Dimensions
61652	Luik Gear Tray	9W/14W/18W	3000/4000/6000	H: 28mm Dia: 282mm
61653	Luik EM Gear Tray	9W/14W/18W	3000/4000/6000	H: 28.5mm Dia: 282mm
72180	Luik Microwave Gear Tray	9W/14W/18W	3000/4000/6000	H: 31.5mm Dia: 282mm
72181	Luik Microwave EM Gear Tray	9W/14W/18W	3000/4000/6000	H: 31.5mm Dia: 282mm

LUCCA CCT

Robust die cast functional exterior wall packs for commercial applications

5YR
WARRANTY

CLASS 2

SMD

IP65
RATED

IK10
RATED

120°
BEAM

UP TO
3000
LUMENS



3000K



4000K



6000K

- Constructed from polycarbonate
- Matt black finish
- 114572 uses LiFePO4 battery



CCT switch



Photocell sensor

Code	Description	W	K	LM	LM/W	Dimensions
114569	Lucca CCT	20W/30W	3000/4000/6000	2000/3000	100	Proj: 110mm H: 306mm W: 265mm
114570	Lucca CCT Microwave	20W/30W	3000/4000/6000	2000/3000	100	Proj: 110mm H: 306mm W: 265mm
114571	Lucca CCT Photocell	20W/30W	3000/4000/6000	2000/3000	100	Proj: 110mm H: 306mm W: 265mm
114572	Lucca CCT EM Pack	-	-	-	-	H: 30mm W: 40mm L: 149mm

EXTERIOR WALL PACK

LUCCA MINI

Compact and functional exterior wall pack

5YR
WARRANTY

CLASS 2

SMD

IP65
RATED

IK08
RATED

120°
BEAM

1500
LUMENS

CCT
FROM 2026



- Black polycarbonate finish

Code	Description		W	K	LM	LM/W	Dimensions
77914	Lucca Mini		15W	4000	1500	100	Proj: 73mm H: 275mm W: 185mm
77915	Lucca Mini MW		15W	4000	1500	100	Proj: 73mm H: 275mm W: 185mm
77916	Lucca Mini Photocell		15W	4000	1500	100	Proj: 73mm H: 275mm W: 185mm

Order online www.saxbytrade.com



CCT
SWITCH



WATTAGE
SWITCH



PUSH FIT
TERMINALS



20MM
CONDUIT ENTRY

FORGE

High performance 4CCT wall packs with robust housing

Forge is a robust and versatile exterior wall pack designed for performance and ease of installation. Featuring loop-in/loop-out wiring, a push-fit terminal block, multi-wattage and four colour switches and 20mm conduit entry points, it offers maximum flexibility straight out of the box. It also boasts durable IP65 and IK10 rated construction and a wide 120° beam angle. Available in two sizes with optional photocell functionality, it's the ideal solution for lighting pathways, perimeters, and commercial exteriors.



UP TO
3240
LUMENS

135
LM/W



121021



121022




121023



121024

- Constructed from polycarbonate
- Matt black textured & clear pc
- Fully adjustable 5-400lux
- Forge: Proj: 134mm H: 228mm W: 251mm
- Forge XL: Proj: 161mm H: 276mm W: 302mm



Conduit entry



Fast fix

Code	Description	W	K	LM	LM/W
121021	NEW Forge	8W/14W	2700/3000/4000/6000	1080/1890	135
121022	NEW Forge Photocell	8W/14W	2700/3000/4000/6000	1080/1890	135
121023	NEW Forge XL	16W/20W/24W	2700/3000/4000/6000	2160/2700/3240	135
121024	NEW Forge XL Photocell	16W/20W/24W	2700/3000/4000/6000	2160/2700/3240	135

SERAN

Slimline LED bulkheads suitable for both commercial and domestic use


5YR
WARRANTY


CLASS 2


SMD


IP65
RATED


IK08
RATED


120°
BEAM

UP TO
1000
LUMENS



55690

- Constructed from polycarbonate

Code	Description	Finish	W	K	LM	LM/W	Dimensions
55689	Seran Plain	Matt black	12W	6000	1000	83	Proj: 90mm Dia: 300mm
55690	Seran Eyelid	Matt black	12W	6000	800	67	Proj: 93mm Dia: 300mm

EXTERIOR BULKHEAD

298

Budget LED bulkhead with weatherproof conduit entry at the top and bottom

3YR
WARRANTY

CLASS 2

SMD

IP65
RATED

120°
BEAM

1200
LUMENS



- Constructed from polycarbonate
- Clear prismatic & black pc



Fast fix

Code	Description	W	K	LM	LM/W	Dimensions
113565	Avit CCT	10W	3000/4000/6000	1200	120	Proj: 59mm L: 240mm W: 110mm

PILLO PLUS CCT

Tough and robust exterior bulkheads

NEW
OPTIONS


3YR
WARRANTY



CLASS 2


SMD



IP65
RATED


IK08
RATED

UP TO
1700
LUMENS



- Constructed from polycarbonate
- PIR version: 10 lux on/off. 100° detection angle, Max 6m detection range with 45 sec hold timer function, installation height Max 4m.



PIR option

Code	Description	Finish	W	K	LM	LM/W	Dimensions
108747	Pillo PLUS CCT	White	15W	3000/4000/6000	1700	113	Proj: 62mm W: 115mm Dia: 215mm
108748	Pillo PLUS CCT PIR	White	15W	3000/4000/6000	1700	113	Proj: 62mm W: 115mm Dia: 215mm
118826 NEW	Pillo PLUS CCT	Black	15W	3000/4000/6000	1500	100	Proj: 62mm W: 115mm Dia: 215mm
118827 NEW	Pillo PLUS CCT PIR	Black	15W	3000/4000/6000	1500	100	Proj: 62mm W: 115mm Dia: 215mm

EXTERIOR BULKHEAD

NEW
OPTIONS

ROND PLUS CCT

Tough and robust exterior bulkheads

 **3YR**
WARRANTY

 **CLASS 2**

 **SMD**

 **IP65**
RATED

 **IK08**
RATED


UP TO
1700
LUMENS



108745

108746

118829



PIR option

- Constructed from polycarbonate
- PIR version: 10 lux on/off. 100° detection angle, Max 6m detection range with 45 sec hold timer function, installation height Max 4m.

Code	Description	Finish	W	K	LM	LM/W	Dimensions
108745	Rond PLUS CCT	White	15W	3000/4000/6000	1700	113	Proj: 62mm Dia: 167mm
108746	Rond PLUS CCT PIR	White	15W	3000/4000/6000	1700	113	Proj: 62mm Dia: 167mm
118828	NEW Rond PLUS CCT	Black	15W	3000/4000/6000	1500	100	Proj: 62mm Dia: 167mm
118829	NEW Rond PLUS CCT PIR	Black	15W	3000/4000/6000	1500	100	Proj: 62mm Dia: 167mm

Order online www.saxbytrade.com

OUR PRODUCTS



SAFE, FAST FIX
INSTALLATION



THE RIGHT PRODUCT
FOR THE JOB



MORE FUNCTIONALITY
THE RIGHT PRICE



INDUSTRY LEADING
WARRANTIES

OUR SERVICE



SAXBY TRADE
EXCLUSIVE PORTAL



TECHNICAL SUPPORT
LIGHTING DESIGN



NEXT DAY DELIVERY
4PM CUT OFF



MARKETING
SUPPORT

SEINA STAINLESS STEEL

Brick sized guide light; no special cutting required



UP TO
160
LUMENS

EXACT
BRICK
SIZE



75527

- Constructed from marine grade stainless steel (316) & polycarbonate
- Min void: 102.5mm
- Cut out: 215 x 65mm

78637



Code	Description	W	K	LM	LM/W	Dimensions
78637	Seina CCT Plain	4.5W	2700/3000/4000/6500	160	36	Proj: 2mm H: 85mm W: 225mm
75527	Seina CCT Guide	2.5W	2700/3000/4000/6500	104	42	Proj: 2mm H: 85mm W: 225mm

Order online www.saxbytrade.com

SEINA BLACK

Brick sized guide light; no special cutting required


3YR
WARRANTY


CLASS 2



SMD


IP44
RATED

UP TO
160
LUMENS

EXACT
BRICK
SIZE

78644

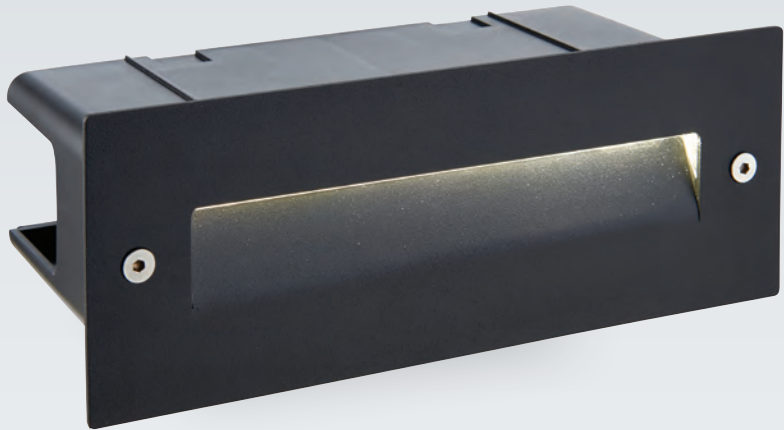

- Constructed from stainless steel (201) & polycarbonate
- Textured black finish
- Min void: 102.5mm
- Cut out: 215 x 65mm

78640



78638



Code	Description	W	K	LM	LM/W	Dimensions
78638	Seina CCT Plain	4.5W	2700/3000/4000/6500	160	36	Proj: 2mm H: 85mm W: 225mm
78640	Seina CCT Louvre	4.5W	2700/3000/4000/6500	36	8	Proj: 8mm H: 85mm W: 225mm
78644	Seina CCT Guide	2.5W	2700/3000/4000/6500	104	42	Proj: 2mm H: 85mm W: 225mm



SEINA RGB SMART

Brick sized guide light; no special cutting required



EXACT
BRICK
SIZE



- Constructed from marine grade stainless steel (316) & polycarbonate
- Suitable for location in or near a marine environment
- For more information on SaxbySmart see page 12

saxby^{INTELLIGENT LIGHTING}smart[®]



“Alexa, turn on the lights”

SaxbySmart products are compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice



Code	Description	W	Dimensions	Min void	Cut out
91962	Seina RGB Smart	3.5W	Proj: 2mm H: 85mm W: 225mm	102.5mm	215 x 65mm

Order online www.saxbytrade.com

SEVERUS CCT

Surface mounted LED guide lights which are quick and easy to fit and ideal for coastal areas

 **3YR**
WARRANTY



 **CLASS 2**

 **SMD**

 **IP65**
RATED

 **120°**
BEAM

UP TO
400
LUMENS

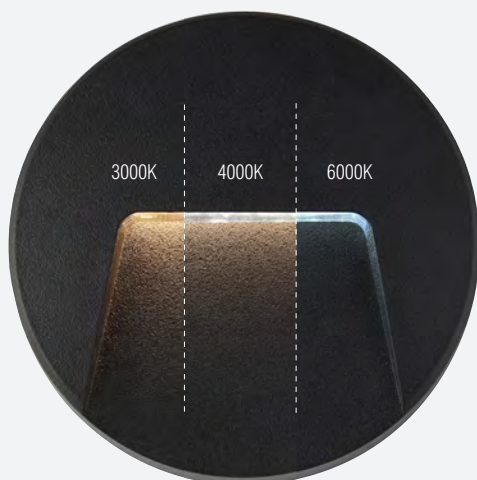


EL-40103



EL-40104




61214




61211



95285



EL-40107



61219



- Constructed from black ABS plastic & frosted polycarbonate
- Suitable for location in or near a marine environment

Code	Description	Finish	K	LM	LM/W	Dimensions
EL-40103	Severus CCT Landscape Direct 3W	Grey	3000/4000/6000	400	133	Proj: 27mm H: 80mm W: 230mm
61211	Severus CCT Landscape Direct 3W	Black	3000/4000/6000	400	133	Proj: 27mm H: 80mm W: 230mm
EL-40104	Severus CCT Landscape Indirect 2W	Grey	3000/4000/6000	100	50	Proj: 27mm H: 80mm W: 230mm
61214	Severus CCT Landscape Indirect 2W	Black	3000/4000/6000	100	50	Proj: 28mm H: 80mm W: 230mm
EL-40107	Severus CCT Square Indirect 3W	Grey	3000/4000/6000	150	50	Proj: 27mm Sq: 125mm
61219	Severus CCT Square Indirect 3W	Black	3000/4000/6000	150	50	Proj: 28mm Sq: 125mm
95285	Severus CCT Round Indirect 3W	Grey	3000/4000/6000	120	40	Proj: 33mm Dia: 135mm
99545	Severus CCT Round Indirect 3W	Black	3000/4000/6000	120	40	Proj: 33mm Dia: 135mm





INDOOR/OUTDOOR
USE



BEZEL
OPTIONS



3K/4K/6.5K
CCT SWITCH



IP65
RATED

ALBUS CCT

Functional and stylish LED guide light

The Albus CCT is a small and compact indirect low level LED wall light with an integrated CCT switch. Its sleek and modern design makes it the perfect addition to any space, either indoors or outdoors due to its IP65 rating. The Albus CCT features three colour temperatures in one unit 3000K/4000K/6500K and is supplied with a black bezel as standard. Other bezel options are available which include: matt white and silver. Each fitting comes pre wired with 20cm of cable.

ALBUS CCT

Surface mounted LED guide lights suitable for coastal areas

3YR
WARRANTY

CLASS 2


SMD

IP65
RATED


100
LUMENS

BEZEL
OPTIONS


0.2M
PRE WIRED
CABLE

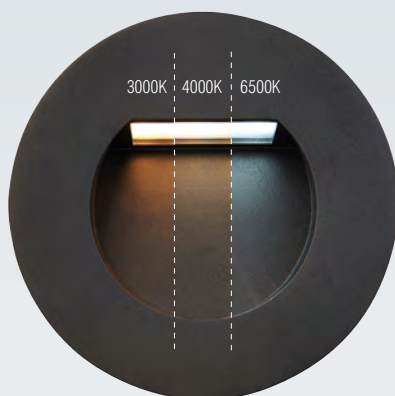


103852

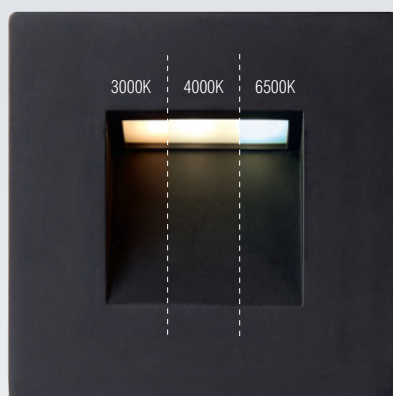

99761



103853



103854



99763



99764

- 1.5W LED module (SMD) CCT

Code	Description	K	LM	LM/W	Dimensions	Cut out
103852	Albus CCT Black 1.5W Round	3000/4000/6500	100	67	Proj: 5mm Dia: 80mm	75mm
103853	Albus CCT White Bezel Round	-	-	-	Proj: 5mm Dia: 80mm	-
103854	Albus CCT Silver Bezel Round	-	-	-	Proj: 5mm Dia: 80mm	-
99761	Albus CCT Black 1.5W Square	3000/4000/6500	100	67	Proj: 5mm H: 85mm W: 85mm	75mm
99763	Albus CCT White Bezel Square	-	-	-	Proj: 5mm Sq: 85mm	-
99764	Albus CCT Silver Bezel Square	-	-	-	Proj: 5mm Sq: 85mm	-

Order online www.saxbytrade.com

ECO

Cost-effective brick light supplied with both plain and louvre panels


2YR
WARRANTY


CLASS 1


DIMMABLE


IP44
RATED

CHOICE OF
FRONT
PANELS




- Constructed from die cast aluminium alloy & frosted glass
- Min void: 75mm



Code	Description	Finish	Lamp	Dimensions	Cut out
52213	Eco Plain & Louvre	Textured grey	E27 GLS (required)	Proj: 6mm H: 102mm W: 235mm	85 x 226mm
0L60AB	Eco Plain & Louvre	Textured black	E27 GLS (required)	Proj: 6mm H: 102mm W: 235mm	85 x 226mm

MAKING THE MOST OF

SAXBYTRADE.COM

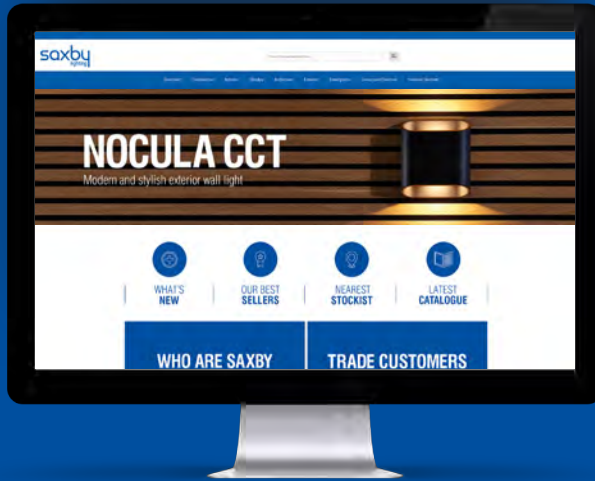

1400+
PRODUCTS



NO MINIMUM
ORDER VALUE



NEXT DAY DELIVERY
FROM STOCK



DELIVER DIRECT
TO SITE



ONLINE IMAGE
& DATA LIBRARY



NEW STOCK
ARRIVING DAILY



HUGE STOCK
HOLDING



EXPERT
SUPPORT TEAM



TECHNICAL SPEC
ACCESS



BRANCH
LOCATOR



ETHICAL &
QUALITY ASSURED



30 YEAR
EXPERIENCE



PUSH FIT
HEAD



3 SIZE
OPTIONS



MINIMUM VOID
80MM



4 COLOUR
OPTIONS

IKONPRO CCT

Unique design, easy to fit decking kits

The IkonPRO range is Saxby's extensive decking kit range in a variety of sizes and colours. Featuring the unique design of removable and interchangeable heads, to change colour you simply turn the head 180° and reinsert into the loom. The Fresnel lenses improve lumen output, diffusing the spread of light evenly. Designed to be fitted and wired during the decking build stage without the heads, the supplied rubber caps protect the fitting from the elements until the decking is complete. Each individual IP67 head then simply plug in, adding the final touches to the decking design.

IKONPRO CCT

Unique design, easy to fit, plug & play decking lights with an IP67 rating


5YR
WARRANTY


CLASS 3


SMD


IP67
RATED


WALK
OVER

UP TO
410
LUMENS

EASY
INSTALL

EXCLUSIVE
DESIGN



3000K/4000K



6500K/BLEU



- Constructed from stainless steel (304) & polycarbonate
- 10 x 0.75W LED module (SMD) CCT
- Min void: 80mm



Code	Description	Finish	K	LM	LM/W	Dimensions	Cut out
73347	IkonPRO CCT 25mm Kit	Stainless steel	3000/4000	120	16	Proj: 1mm Dia: 25mm	Dia: 20mm
73348	IkonPRO CCT 35mm Kit	Stainless steel	3000/4000	280	37	Proj: 1mm Dia: 35mm	Dia: 25mm
73349	IkonPRO CCT 45mm Kit	Stainless steel	3000/4000	410	55	Proj: 1mm Dia: 45mm	Dia: 32mm
76615	IkonPRO CCT 25mm Kit	Stainless steel	6500/Blue	120	16	Proj: 1mm Dia: 25mm	Dia: 20mm
76616	IkonPRO CCT 35mm Kit	Stainless steel	6500/Blue	280	37	Proj: 1mm Dia: 35mm	Dia: 25mm
76617	IkonPRO CCT 45mm Kit	Stainless steel	6500/Blue	410	55	Proj: 1mm Dia: 45mm	Dia: 32mm

Order online www.saxbytrade.com

IKONPRO ACCESSORIES

Unique design, easy to fit, plug and play decking light accessories



94431



94430



94434



71553





71554



- PIR presence detector - 30 lux on, 30 lux off. 115 degree 1.5m detection range, 5 minutes $\pm$ 1min off after no movement
- Twilight detector - 30 lux on, 30 lux off
- Constructed from stainless steel (304) & polycarbonate

Fitting the IkonPRO couldn't be easier....



Code	Description	Dimensions	Cut out
94430	IkonPRO CCT 25mm Added-on Head	Proj: 1mm Dia: 25mm	Dia: 20mm
94431	IkonPRO CCT 35mm Added-on Head	Proj: 1mm Dia: 35mm	Dia: 25mm
94434	5m Cable Accessory	-	-
71553	IkonPRO PIR Presence Detector	 Proj: 4mm Dia: 45mm	Dia: 32mm
71554	IkonPRO Twilight Detector	 Proj: 1mm Dia: 45mm	Dia: 32mm

EXTERIOR DECKING

IKONPRO BLACK

Unique design, easy to fit, plug and play decking lights with an IP67 rating

5YR
WARRANTY

CLASS 3

SMD

IP67
RATED

WALK
OVER

280
LUMENS

EASY
INSTALL

EXCLUSIVE
DESIGN



3000K/4000K

- Constructed from stainless steel (304) & polycarbonate
- 10 x 0.75W LED module (SMD) CCT
- Min void: 80mm

Code	Description	Finish	K	LM	LM/W	Dimensions	Cut out
99765	IkonPRO CCT 35mm Kit	Black	3000/4000	280	37	Proj: 1mm Dia: 35mm	Dia: 25mm

Order online www.saxbytrade.com

IKONPRO RGB

Unique design, easy to fit, plug & play decking lights with an IP67 rating

- 
3YR
WARRANTY
- 
CLASS 3
- 
DIMMABLE
- 
IP67
RATED
- 
WALK
OVER
- 
REMOTE
CONTROL



- Constructed from stainless steel (304) & polycarbonate
- Kit includes: 10 x LED heads, Driver, 5m Extension cable, 2 x 5 way looms, 3 Pin Plug & Wi-Fi smart connector
- Min void: 80mm

Code	Description	W	Dimensions	Cut out
59136	IkonPRO RGB 25mm Kit	10 x 0.75W	Proj: 1mm Dia: 25mm	20mm
59138	IkonPRO RGB 45mm Kit	10 x 1.5W	Proj: 1mm Dia: 45mm	32mm

EXTERIOR DECKING



IKONPRO RGB SMART

Unique design, easy to fit, plug & play smart decking lights with an IP67 rating


3YR
WARRANTY


CLASS 3


DIMMABLE


IP67
RATED


WALK
OVER

SMART
TECHNOLOGY



- Kit includes: 10 x 0.75W LED heads, 15W Driver, 5m Extension cable, 2 x 5 way looms, 3 Pin Plug & Wi-Fi smart connector
- For more information on SaxbySmart see page 12

saxbysmart[®]
INTELLIGENT LIGHTING



92019

“Alexa, turn on the lights”

SaxbySmart products are compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice



Code	Description	W	Dimensions	Cut out
91961	IkonPRO Smart 35mm Kit	10 x 0.75W	Dia: 35mm	Dia: 25mm
92019	10m Cable Accessory	-	-	-

Order online www.saxbytrade.com

IKON ROUND

Easy to install decking kits

 **3YR**
WARRANTY

 **CLASS 2**

 **SMD**

 **IP67**
RATED

 **WALK**
OVER

CCT
FROM 2026



- Constructed from stainless steel (304) & polycarbonate
- 10 x 0.45W LED module (capsule)
- Min void: 35mm



Code	Description	K	LM	LM/W	Dimensions	Cut out
13889	Ikon Round 30mm Kit	2700/3000/4000/6500	80	18	Proj: 1mm Dia: 30mm	Dia: 22mm

EXTERIOR DECKING

KIOS 2 CCT

Cost effective outdoor decking lights



2700K

3000K

BLUE

GREEN

4000K

6500K

CYAN

LIGHT BLUE

- Polished stainless steel & clear pc
- 10 x 0.45W LED module (SMD)
- 1 x 12V IP20 inline transformer with 5 metres of cable
- 10 x LED light fittings each with 1 metre of cable attached

Code	Description	K	LM	LM/W	Dimensions	Cut out
75530	Kios 2 CCT	2700/3000/4000/6500	154	34	Proj: 1mm Dia: 30mm	Dia: 22mm
94422	Kios 2 Blue CCT	Blue/Green/Cyan/Light Blue	-	-	Proj: 1mm Dia: 30mm	Dia: 22mm

Order online www.saxbytrade.com

COVE

Marine grade recessed decking light


2YR
WARRANTY


CLASS 2


SMD


IP67
RATED


MARINE
GRADE


WALK
OVER

1.5M
PRE WIRED
CABLE



3000K

4000K

6500K

BLUE



- Constructed from marine grade stainless steel (316L) & polycarbonate
- Min void: 70mm

Code	Description	W	K	LM	LM/W	Dimensions	Cut out
73463	Cove Round	0.8W	3000	50	63	Proj: 3mm Dia: 40mm	Dia: 32mm
99561	Cove Round	0.8W	4000	50	63	Proj: 3mm Dia: 40mm	Dia: 32mm
67360	Cove Round	0.8W	6500	50	63	Proj: 3mm Dia: 40mm	Dia: 32mm
92012	Cove Round	0.8W	Blue	-	-	Proj: 3mm Dia: 40mm	Dia: 32mm

EXTERIOR DECKING

2YR
WARRANTY

CLASS 2

SMD

IP67
RATED

MARINE
GRADE

WALK
OVER

1.5M
PRE WIRED
CABLE



3000K

6500K



- Constructed from marine grade stainless steel (316L) & polycarbonate
- Min void: 110mm

Code	Description	W	K	LM	LM/W	Dimensions	Cut out
73464	Hayz Round	1.2W	3000	80	67	Proj: 2mm D: 64mm Dia: 60mm	Dia: 50mm
67361	Hayz Round	1.2W	6500	80	67	Proj: 2mm D: 64mm Dia: 60mm	Dia: 50mm



BEZEL
OPTIONS



WALK
OVER



IP67
RATED



IK08
RATED

HADES

Multi-directional decking/ground light solution

The Hades is our multi directional decking/ground light solution. Using the unique design of removable and interchangeable heads you can change the light angles to suit your requirements. Choose from a 1 way, 2 way or 4 way bezel to reach your desired lighting effect. Available in 3000K and 4000K.

 **2YR**
WARRANTY

 **CLASS 2**

 **SMD**

 **IP67**
RATED

 **IK08**
RATED

 **WALK**
OVER

80
LUMENS





91954



91955



114598



Trimless screw pack

- Constructed from die cast aluminium alloy & polycarbonate
- Frosted pc & satin nickel plate
- Complete with integrated control gear



Fast fix push connectors



Code	Description	W	K	LM	LM/W	Dimensions	Cut out
91954	Hades 3000K	1.2W	3000	80	67	Proj: 2mm H: 78mm Dia: 40mm	33mm
91955	Hades 4000K	1.2W	4000	80	67	Proj: 2mm H: 78mm Dia: 40mm	33mm
91957	Hades Bezel 1-way	-	-	-	-	Proj: 10mm Dia: 45mm	-
91958	Hades Bezel 2-way	-	-	-	-	Proj: 10mm Dia: 45mm	-
91959	Hades Bezel 4-way	-	-	-	-	Proj: 10mm Dia: 45mm	-
114598	Hades Trimless Accessory	-	-	-	-	H: 47mm Dia: 64mm	46mm



3K/4K/6.5K
CCT SWITCH



WALK
OVER



DRIVE
OVER



IK10
RATED

MARKA CCT

Surface mounted, multi-directional ground light

Introducing the Marka CCT, a surface-mounted, multi-directional ground light designed for durability and versatility. Constructed from die-cast aluminium with an IK10 rating, it's tough enough for demanding commercial environments. With an IP67 rating, it's fully protected against dust and water. The Marka CCT offers three selectable colour temperatures: 3000K, 4000K, 6500K that can be easily adjusted with a flick of a switch, along with 1-way, 2-way, or 4-way light options to suit your exterior space.

3YR
WARRANTY

CLASS 1

SMD

IP67
RATED

IK10
RATED

UP TO
55
LUMENS

SURFACE
MOUNTED

1M
PRE WIRED
CABLE



114575



114576



114577

- Constructed from die cast aluminium alloy & polycarbonate
- Complete with LED driver
- Can be wall mounted



CCT switch



Push fit connector

Code	Description	W	K	LM	LM/W	Dimensions
114575	Marka CCT 1-way	2.6W	3000/4000/6500	24	9	H: 55mm Dia: 210mm
114576	Marka CCT 2-way	2 x 2.3W	3000/4000/6500	46	10	H: 55mm Dia: 210mm
114577	Marka CCT 4-way	4 x 1.4W	3000/4000/6500	55	10	H: 55mm Dia: 210mm

PILLAR MARINE GRADE

Robust ground light constructed from marine grade stainless steel


2YR
WARRANTY


CLASS 1


DIMMABLE


IP65
RATED


IK08
RATED


MARINE
GRADE

LED
COMPATIBLE

1M
PRE WIRED
CABLE



- Constructed from marine grade stainless steel (316L) & glass
- Min void: 144mm

Code	Description	Lamp	Dimensions	Cut out
52212	Pillar Round Marine Grade	GU10 (required)	Proj: 6mm H: 150mm Dia: 105mm	Dia: 102mm
52211	Pillar Square Marine Grade	GU10 (required)	Proj: 6mm H: 150mm Sq: 110mm	Dia: 102mm

EXTERIOR GROUND

PILLAR

Robust ground light constructed from stainless steel

- 
2YR
WARRANTY
- 
CLASS 1
- 
DIMMABLE
- 
IP65
RATED
- 
IK08
RATED

LED
COMPATIBLE

1M
PRE WIRED
CABLE



- Constructed from stainless steel (304) & glass



Code	Description	Finish	Lamp	Dimensions	Cut out
114578	Pillar Round	Stainless steel	GU10 (required)	Proj: 3.5mm H: 124mm Dia: 110mm	Dia: 104mm
114579	Pillar Square	Stainless steel	GU10 (required)	Proj: 3.5mm H: 124mm Sq: 110mm	Dia: 104mm
103851	Pillar Round	Matt black	GU10 (required)	Proj: 6mm H: 150mm Dia: 105mm	Dia: 102mm

Order online www.saxbytrade.com

PILLAR TILT

Robust ground light constructed from stainless steel


2YR
WARRANTY


CLASS 1


DIMMABLE


IP67
RATED


IK08
RATED

1M
PRE WIRED
CABLE



- Constructed from stainless steel (304) & glass

Code	Description	Lamp	Dimensions	Cut out	Tilt
99550	Pillar Tilt Round	GU10 (required)	Proj: 6mm H: 156mm Dia: 140mm	Dia: 135mm	25°

EXTERIOR GROUND

Strong and sturdy ground light with an adjustable light source



UP TO
1550
LUMENS

ADJUSTABLE
LIGHT
HEAD

0.5M
PRE WIRED
CABLE

--- 108mm ---



--- 141mm ---




--- 185mm ---



- Constructed from stainless steel (304) & glass

Code	Description	W	K	LM	LM/W	Dimensions	Cut out	Tilt
90962	Hoxton	6.5W	3000	600	92	Proj: 4.5mm H: 128mm Dia: 108mm	Dia: 105mm	20°
79195	Hoxton	6.5W	4000	600	92	Proj: 4.5mm H: 128mm Dia: 108mm	Dia: 105mm	20°
90964	Hoxton	13W	3000	1000	77	Proj: 4.5mm H: 158mm Dia: 141mm	Dia: 135mm	30°
90963	Hoxton	13W	4000	1000	77	Proj: 4.5mm H: 158mm Dia: 141mm	Dia: 135mm	30°
94059	Hoxton	16.5W	3000	1550	94	Proj: 4.5mm H: 186mm Dia: 185mm	Dia: 177mm	30°
94060	Hoxton	16.5W	4000	1550	94	Proj: 4.5mm H: 186mm Dia: 185mm	Dia: 177mm	30°

STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

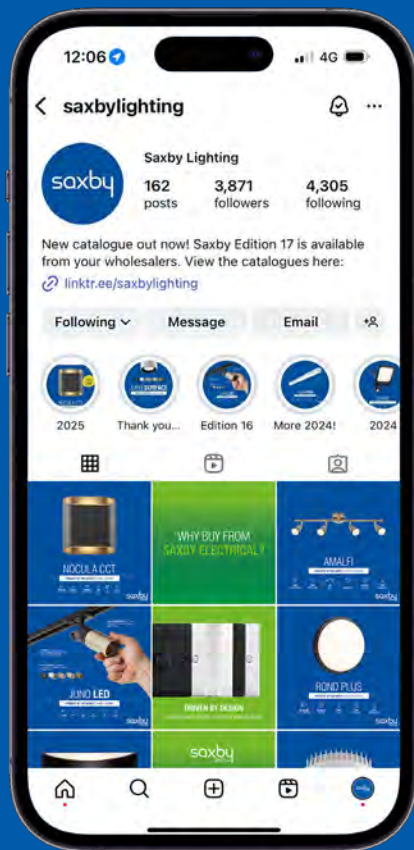

Follow us on Facebook,
X, Instagram and LinkedIn



LUMINATRA

Bright LED spike light with versatile mounting


3YR
WARRANTY


CLASS 1


COB


IP65
RATED

345
LUMENS

SPIKE/WALL
MOUNT
OPTIONS

2M
PRE WIRED
CABLE



- Constructed from aluminium alloy & polycarbonate

Code	Description	Finish	W	K	LM	LM/W	Dimensions
78636	Luminatra Spike	Black	6W	3000/4000/6000	345	58	H: 290mm Dia: 60mm

Order online www.saxbytrade.com

TRITON

Cost effective spike light solution


2YR
WARRANTY


CLASS 2


DIMMABLE


IP65
RATED

1M
PRE WIRED
CABLE



- Constructed from polycarbonate
- Frosted & black pc
- Suitable for location in or near marine environments

Code	Description	Lamp	Dimensions
99564	Triton Spike	GU10 (required)	H: 320mm W: 72mm D: 110mm

EXTERIOR SPIKE

OPAZ MV

Mains voltage robust die cast spike light


2YR
WARRANTY


CLASS 1


DIMMABLE


IP65
RATED

2M
PRE WIRED
CABLE

LED
COMPATIBLE



- Constructed from die cast aluminium alloy & glass

Code	Description	Finish	Lamp	Dimensions
POLGU10	Opaz MV Spike	Textured matt black	GU10 (required)	H: 362mm W: 122mm D: 98mm

Order online www.saxbytrade.com



EMERGENCY

We offer a wide range of emergency lighting, from guides to recessed fittings. All of a high quality and spec, to ensure effective lighting of exit paths in an emergency situation.

GUIDE	337
WALL	341
RECESSED	342
EMERGENCY KIT	346



PUSH FIT
TERMINALS



3HR
BATTERY



IP65
RATED



5YR
WARRANTY

SIGHTPRO

Robust & weatherproof emergency bulkhead

The SightPRO LED bulkhead offers versatile functionality, with the option to configure it as either a maintained or non-maintained emergency fitting to suit a wide range of installations. Powered by an energy-efficient 3.8W daylight white LED module, it delivers a bright 300-lumen output for up to 3 hours in the event of a power failure, ensuring reliable illumination when it's needed most. Designed with practicality in mind, the SightPRO is supplied with a self-adhesive emergency exit legend sign kit, providing a clear and simple solution for creating effective escape route signage.

SIGHTPRO BULKHEAD

Reliable, robust and weatherproof emergency bulkhead


5YR
WARRANTY


CLASS 2


SMD


IP65
RATED


3HR
BATTERY


EMERGENCY
MAINTAINED


EMERGENCY
NON MAINTAINED

UP TO
300
LUMENS

18M
VIEWING
DISTANCE



- 5 years warranty on battery based on operating temperature 0 - 45 degree
- Uses LiFePO4 battery



Push fit terminals



Switch for self test & manual test (108749)

Code	Description	K	LM	LM/W	Dimensions
108087	SightPRO 3.8W	6500	300	79	Proj: 64mm L: 350mm W: 110mm
108749	SightPRO 4W Self test & manual test switchable	6500	200	50	Proj: 64mm L: 350mm W: 110mm

SIGHTPRO MINI

Reliable, robust and weatherproof mini emergency bulkhead

 **5YR**
WARRANTY

 **CLASS 2**

 **SMD**

 **IP65**
RATED

 **3HR**
BATTERY

 **EMERGENCY**
MAINTAINED

 **EMERGENCY**
NON MAINTAINED

220
LUMENS

18M
VIEWING
DISTANCE



- Constructed from polycarbonate



Conduit knock out entry



Push fit connector

Code	Description	Finish	W	K	LM	LM/W	Dimensions
91358	SightPRO Mini IP65	Gloss white	3W	6500	220	73	Proj: 48mm H: 110mm L: 210mm

EMERGENCY BULKHEAD

SIGHTPRO BOX

Wall mounted emergency light suitable for all applications


5YR
WARRANTY


CLASS 2


SMD


IP20
RATED


3HR
BATTERY


EMERGENCY
MAINTAINED


EMERGENCY
NON MAINTAINED

25
LUMENS

24M
VIEWING
DISTANCE



- Constructed from steel & polycarbonate
- Manual & self-test switchable
- Uses LiFePO4 battery



Supplied with up, left & right arrows

Code	Description	Finish	W	K	LM	LM/W	Dimensions
114596	SightPRO Box	White	3.5W	6500	25	7	L: 325mm W: 34mm H: 170mm

Order online www.saxbytrade.com

SIGHTPRO 6-IN-1

LED guide fitting with 6 mounting options

**5YR**
WARRANTY

**CLASS 2**

**SMD**

**IP20**
RATED

**3HR**
BATTERY

**EMERGENCY**
MAINTAINED

**EMERGENCY**
NON MAINTAINED

110
LUMENS

24M
VIEWING
DISTANCE

ADJUSTABLE
HEIGHT



- 5 year warranty on battery based on operating temperature 0-45 degree
- Clear polycarbonate & green acrylic finish
- 108751: Min void 52mm, Cut out 335 x 57mm
- Uses LiFePO4 battery



Supplied with up, left & right arrows

Code	Description	W	K	LM	LM/W	Dimensions
108750	SightPRO 6-in-1	3.5W	6500	110	31	H: 245-545mm L: 339mm W: 42mm
108751	SightPRO 6-in-1 Recess accessory	-	-	-	-	H: 56mm L: 365mm W: 75mm
108752	SightPRO 6-in-1 Wall flag mount accessory	-	-	-	-	H: 64mm L: 150mm W: 42mm
108753	SightPRO 6-in-1 Track mount accessory	-	-	-	-	H: 66mm L: 93mm W: 32mm

SIGHTPRO TWIN SPOT

Adjustable twin spot emergency wall pack

5YR
WARRANTY

CLASS 2

SMD

IP65
RATED

3HR
BATTERY

EMERGENCY
NON MAINTAINED

600
LUMENS



- Constructed from steel & frosted polycarbonate
- Gloss white finish
- Manual & self-test switchable
- Uses LiFePO4 battery



Push fit terminals



Self test & manual test switch

Code	Description	W	K	LM	LM/W	Dimensions
114597	SightPRO Twin Spot	2 x 2W	6500	600	150	L: 265mm W: 90mm H: 240mm

Order online www.saxbytrade.com

SIGHTPRO DOWNLIGHT

High output recessed emergency downlight


5YR
WARRANTY


CLASS 2


LED
HI POWER


IP20
RATED


IK08
RATED


3HR
BATTERY


EMERGENCY
NON MAINTAINED

120
LUMENS



Twist lock bezel



- Constructed from aluminium alloy & polycarbonate
- Min void: 190mm
- Uses LiFePO4 battery

INTERCHANGEABLE BEZELS

White, silver and black bezels included



Code	Description	W	K	LM	LM/W	Dimensions	Cut out
90633	SightPRO Emergency Downlight	2W	6500	120	60	Proj: 26mm D: 60mm	50mm

EMERGENCY RECESSED

NEW
PRODUCT

SIGHTPRO 2-IN-1

High output, 2-in-1 emergency downlight

5YR
WARRANTY

CLASS 2

SMD

IP20
RATED


3HR
BATTERY

EMERGENCY
NON MAINTAINED

600
LUMENS



- Constructed from steel & frosted polycarbonate
- Gloss white finish
- Surface mount and recessed mount options
- Corridor lens included as accessory
- Manual & self-test switchable
- Uses LiFePO4 battery



Replaceable lens

Code	Description	W	K	LM	LM/W	Dimensions	Cut out
121034	NEW SightPRO 2-in-1 Downlight	2.5W	6500	215	86	Proj: 39.1mm Dia: 105mm	76mm

Order online www.saxbytrade.com

SIGHT RECESSED

Emergency recessed fitting suitable for ceilings and stairways

**3YR**
WARRANTY

CLASS 1

SMD

**IP20**
RATED

**3HR**
BATTERY

**EMERGENCY**
MAINTAINED

**EMERGENCY**
NON MAINTAINED

310
LUMENS




- Constructed from steel & polycarbonate
- Gloss white finish
- Cut hole: 392 x 112mm

Code	Description	W	K	LM	LM/W	Dimensions
72641	Sight Recessed	7.8W	6500	310	40	Proj: 11mm W: 138mm L: 410mm

EMERGENCY RECESSED

STAY UP TO DATE WITH THE LATEST PRODUCT RELEASES FROM SAXBY

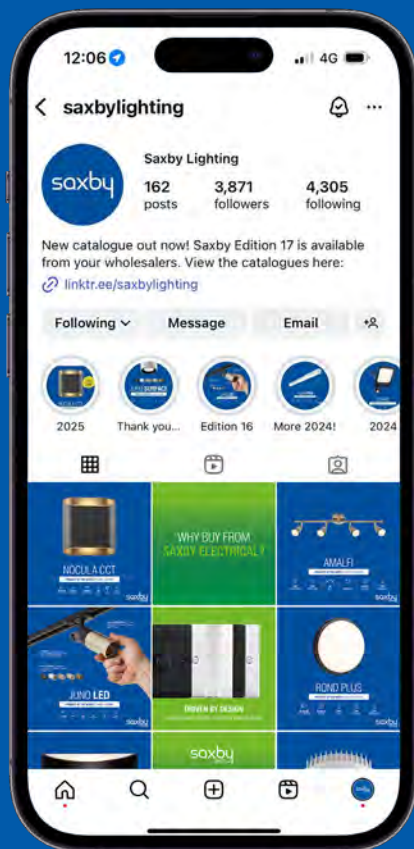

Follow us on Facebook,
X, Instagram and LinkedIn



EMERGENCY LED CONVERSION KIT

Self-test and manual test 2-in-1 emergency kit


5YR
WARRANTY


IP20
RATED


3HR
BATTERY


EMERGENCY
MAINTAINED

2-IN-1



- 5 year warranty on battery based on operating temperature 0-45 degree
- Gloss white polycarbonate film
- DC output voltage 20-55V
- Uses LiFePO4 battery




Self test & manual test switch

Code	Description	Specification	Dimensions
108097	Emergency LED Conversion Kit	6.4V 1500mAh	H: 30mm W: 43mm L: 200mm

EMERGENCY KITS

Self-contained emergency pack

347



LAMPS & ACCESSORIES

Many of our products can be utilised even further with our accessories. Everything from lamps, to drivers to sensors, all to help give you more choice to suit your lighting requirements.

GU10	350
MR16	357
GU10 SMART	358
G4	359
G9	360
B22	362
E27	363
E14	366
DIMMER	368
DRIVER	369
TRANSFORMER	371
SENSOR	372
CONNECTOR	381

GU10 4W

See product pages and Saxbytrade.com for full range of lamps

**2YR**
WARRANTY

DIMMABLE

**36°**
BEAM

USE IN
ENCLOSED
CAN



**WARM**

345
LUMENS

86
LM/W

**COOL**

345
LUMENS

86
LM/W

Code	Description	K	LM	LM/W	Dimensions
114564	GU10 LED 4W	2700	345	86	H: 56mm Dia: 50mm
114565	GU10 LED 4W	4000	345	86	H: 56mm Dia: 50mm
114566	GU10 LED 4W DIM 	2700	345	86	H: 56mm Dia: 50mm
114567	GU10 LED 4W DIM 	4000	345	86	H: 56mm Dia: 50mm

GU10 5W

See product pages and Saxbytrade.com for full range of lamps

 **2YR**
WARRANTY

 **60°**
BEAM

USE IN
ENCLOSED
CAN



450
LUMENS

90
LM/W



470
LUMENS

94
LM/W



500
LUMENS

100
LM/W

Code	Description	K	LM	LM/W	Dimensions
112545	GU10 LED 5W	3000	450	90	H: 56mm Dia: 50mm
112546	GU10 LED 5W	4000	470	94	H: 56mm Dia: 50mm
112547	GU10 LED 5W	6500	500	100	H: 56mm Dia: 50mm
113567	GU10 LED 5W 10 Pack	3000	450	90	H: 56mm Dia: 50mm
113568	GU10 LED 5W 10 Pack	4000	470	94	H: 56mm Dia: 50mm
113569	GU10 LED 5W 10 Pack	6500	500	100	H: 56mm Dia: 50mm
112548	GU10 LED 5W DIM 	3000	450	90	H: 56mm Dia: 50mm
112549	GU10 LED 5W DIM 	4000	470	94	H: 56mm Dia: 50mm
112550	GU10 LED 5W DIM 	6500	500	100	H: 56mm Dia: 50mm
113570	GU10 LED 5W DIM 10 Pack 	3000	450	90	H: 56mm Dia: 50mm
113571	GU10 LED 5W DIM 10 Pack 	4000	470	94	H: 56mm Dia: 50mm
113572	GU10 LED 5W DIM 10 Pack 	6500	500	100	H: 56mm Dia: 50mm

Order online www.saxbytrade.com

GU10 7W

See product pages and Saxbytrade.com for full range of lamps



USE IN
ENCLOSED
CAN



Code	Description		K	LM	LM/W	Dimensions
70257	GU10 LED SMD 60° 7W		3000	680	97	H: 54mm Dia: 50mm
70258	GU10 LED SMD 60° 7W		4000	680	97	H: 54mm Dia: 50mm
74045	GU10 LED SMD 60° 7W		6000	680	97	H: 54mm Dia: 50mm
70259	GU10 LED SMD 60° 7W		3000	550	79	H: 54mm Dia: 50mm
70260	GU10 LED SMD 60° 7W		4000	580	83	H: 54mm Dia: 50mm
74048	GU10 LED SMD 60° 7W		6000	580	83	H: 54mm Dia: 50mm

LAMPS & ACCESSORIES GU10

GU10 CCT

See product pages and Saxbytrade.com for full range of lamps


2YR
WARRANTY


60°
BEAM

600
LUMENS



2700K



4000K



6500K

Code	Description	K	LM	LM/W	Dimensions
110974	GU10 LED CCT 7W	2700/4000/6500	600	86	H: 56mm Dia: 50mm
113566	GU10 LED CCT 7W 10 pack	2700/4000/6500	600	86	H: 56mm Dia: 50mm

Order online www.saxbytrade.com

GU10 5W

See product pages and Saxbytrade.com for full range of lamps



Code	Description	K	LM	LM/W	Dimensions
78856	GU10 LED SMD 5W	3000	470	94	H: 59mm Dia: 50mm
78857	GU10 LED SMD 5W	4000	470	94	H: 59mm Dia: 50mm
78858	GU10 LED SMD 5W	6500	470	94	H: 59mm Dia: 50mm

GU10 LAMPS

See product pages and Saxbytrade.com for full range of lamps



Code	Description		K	LM	LM/W	Dimensions
103026	GU10 LED SMD 8W		3000	800	100	H: 54mm Dia: 50mm
103027	GU10 LED SMD 8W		4000	800	100	H: 54mm Dia: 50mm
78859	GU10 LED SMD 6W		3000	435	73	H: 54mm Dia: 50mm
78860	GU10 LED SMD 6W		4000	435	73	H: 54mm Dia: 50mm
78861	GU10 LED SMD 6W		6500	435	73	H: 54mm Dia: 50mm
78862	GU10 LED SMD 6W		3000	470	78	H: 54mm Dia: 50mm
78863	GU10 LED SMD 6W		4000	470	78	H: 54mm Dia: 50mm
78864	GU10 LED SMD 6W		6500	470	78	H: 54mm Dia: 50mm
92537	GU10 LED SMD 5W		Blue	-	-	H: 54mm Dia: 50mm

Order online www.saxbytrade.com

GLASS GU10

See product pages and Saxbytrade.com for full range of lamps





Code	Description	K	LM	LM/W	Dimensions
90982	GU10 LED SMD 6W	3000	470	78	H: 56mm D: 50mm
90983	GU10 LED SMD 6W	4000	470	78	H: 56mm D: 50mm

LAMPS & ACCESSORIES GU10 GLASS

MR16 LAMPS

See product pages and Saxbytrade.com for full range of lamps



Code	Description	K	LM	LM/W	Dimensions
92535	MR16 LED SMD 7W	3000	550	79	H: 52mm D: 50mm
92536	MR16 LED SMD 7W	4000	550	79	H: 52mm D: 50mm

GU10 SMART

See product pages and Saxbytrade.com for full range of lamps



SMART
2700-6500K



- For more information on SaxbySmart see page 12

saxbysmart®
INTELLIGENT LIGHTING

“Alexa, turn on the lights”

SaxbySmart products are compatible with Amazon Echo and Google Home allowing you to control the lights directly using your own voice



Code	Description	K	LM	LM/W	Dimensions
91949	GU10 Smart RGB CCT 5W	2700-6500 + RGB	350	70	H: 58mm Dia: 50mm

LAMPS & ACCESSORIES GU10 SMART

G4 LAMPS

See product pages and Saxbytrade.com for full range of lamps



- Compatible with LED drivers only, not transformer

Code	Description	K	LM	LM/W	Dimensions
98435	G4 LED SMD 2W	3000	200	100	H: 37mm Dia: 10mm
98436	G4 LED SMD 2W	4000	200	100	H: 37mm Dia: 10mm

G9 LAMPS

See product pages and Saxbytrade.com for full range of lamps



USE IN
ENCLOSED
CAN



320
LUMENS

100
LM/W



200
LUMENS

100
LM/W

Code	Description		K	LM	LM/W	Dimensions
98432	G9 LED SMD 3.2W		3000	320	100	H: 50mm Dia: 16mm
98433	G9 LED SMD 3.2W		4000	320	100	H: 50mm Dia: 16mm
98434	G9 LED SMD 3.2W		6500	320	100	H: 50mm Dia: 16mm
76790	G9 LED SMD 2W		3000	200	100	H: 48mm Dia: 16mm
76791	G9 LED SMD 2W		4000	200	100	H: 48mm Dia: 16mm
81556	G9 LED SMD 2W		6500	200	100	H: 48mm Dia: 16mm

G9 LAMPS

See product pages and Saxbytrade.com for full range of lamps



 WARM & COOL	470 LUMENS	127 LM/W
---	----------------------	--------------------



 WARM, COOL & DAYLIGHT	400 LUMENS	114 LM/W
--	----------------------	--------------------

Code	Description		K	LM	LM/W	Dimensions
101619	G9 LED SMD 3.7W		3000	470	127	H: 49mm Dia: 16mm
101620	G9 LED SMD 3.7W		4000	470	127	H: 49mm Dia: 16mm
81019	G9 LED SMD 3.5W		3000	400	114	H: 50mm Dia: 16mm
81020	G9 LED SMD 3.5W		4000	400	114	H: 50mm Dia: 16mm
81021	G9 LED SMD 3.5W		6500	400	114	H: 50mm Dia: 16mm

Order online www.saxbytrade.com

B22 GLS

See product pages and Saxbytrade.com for full range of lamps

NEW

OPTIONS



806
LUMENS

101
LM/W

806
LUMENS

101
LM/W

UP TO
1100
LUMENS

UP TO
138
LM/W

Code	Description	K	LM	LM/W	Dimensions
119336 NEW	B22 LED GLS 8W	2700	806	101	H: 105mm Dia: 60mm
119337 NEW	B22 LED GLS 8W	4000	806	101	H: 105mm Dia: 60mm
119338 NEW	B22 LED GLS 8W	6500	806	101	H: 105mm Dia: 60mm
94344	B22 LED Filament GLS 6W	2700	806	134	H: 105mm Dia: 60mm
94345	B22 LED Filament GLS 7W	2700	806	115	H: 105mm Dia: 60mm
76800	B22 LED Filament GLS 8W	2700	1100	138	H: 103mm Dia: 60mm



806
LUMENS

UP TO
101
LM/W



806
LUMENS

101
LM/W



UP TO
1100
LUMENS

UP TO
138
LM/W

Code	Description	K	LM	LM/W	Dimensions
119333 NEW	E27 LED GLS 8W	2700	806	101	H: 107mm Dia: 60mm
119334 NEW	E27 LED GLS 8W	4000	806	101	H: 107mm Dia: 60mm
119335 NEW	E27 LED GLS 8W	6500	806	101	H: 107mm Dia: 60mm
76806	E27 LED GLS 8.5W	3000	806	95	H: 105mm Dia: 60mm
94342	E27 LED Filament GLS 6W	2700	806	134	H: 105mm Dia: 60mm
94343	E27 LED Filament GLS 7W	2700	806	115	H: 108mm Dia: 60mm
76799	E27 LED Filament GLS 8W	2700	1100	138	H: 105mm Dia: 60mm

E27 FILAMENT PEAR & GLOBE

See product pages and Saxbytrade.com for full range of lamps

**2YR**
WARRANTY

**DIMMABLE**



**450**
LUMENS

75
LM/W

**810**
LUMENS

116
LM/W

**810**
LUMENS

116
LM/W

Code	Description	K	LM	LM/W	Dimensions
76803	E27 LED Filament Pear 6W	1800	450	75	H: 142mm Dia: 64mm
76801	E27 LED Filament Globe 95mm 7W	2700	810	116	H: 140mm Dia: 95mm
76802	E27 LED Filament Globe 125mm 7W	2700	810	116	H: 170mm Dia: 125mm

LAMPS & ACCESSORIES E27

E27 STICK

See product pages and Saxbytrade.com for full range of lamps


2YR
WARRANTY

CCT
TECHNOLOGY




3000K



4000K



6500K



Shown in bollard

Code	Description	K	LM	LM/W	Dimensions
113969	E27 LED Stick CCT 8W	3000/4000/6500	720	90	H: 109mm Dia: 40mm

Order online www.saxbytrade.com

E14 GOLF & CANDLE

See product pages and Saxbytrade.com for full range of lamps

NEW
OPTIONS



470
LUMENS

96
LM/W



470
LUMENS

UP TO
104
LM/W

Code	Description	K	LM	LM/W	Dimensions
119339 NEW	E14 LED Candle 4.9W	2700	470	96	H: 102mm Dia: 35mm
119340 NEW	E14 LED Candle 4.9W	4000	470	96	H: 102mm Dia: 35mm
119341 NEW	E14 LED Candle 4.9W	6500	470	96	H: 102mm Dia: 35mm
119342 NEW	E14 LED Golf 4.9W	2700	470	96	H: 82mm Dia: 45mm
119343 NEW	E14 LED Golf 4.9W	4000	470	96	H: 82mm Dia: 45mm
119344 NEW	E14 LED Golf 4.9W	6500	470	96	H: 82mm Dia: 45mm
76797	E14 LED Filament Golf 4.5W	2700	470	104	H: 80mm Dia: 45mm
76798	E14 LED Filament Candle 4.5W	2700	470	104	H: 97mm Dia: 35mm
94340	E14 LED Filament Golf 4.5W	2700	470	104	H: 80mm Dia: 45mm
94341	E14 LED Filament Candle 4.5W	2700	470	104	H: 98mm Dia: 35mm

LAMPS & ACCESSORIES E14

E14 & E27 WHITE FILAMENT

See product pages and Saxbytrade.com for full range of lamps



Code	Description	K	LM	LM/W	Dimensions
120798	NEW E14 LED White Filament Golf 4.5W	2700	470	104	H: 80mm Dia: 45mm
120799	NEW E14 LED White Filament Candle 4.5W	2700	470	104	H: 97mm Dia: 35mm
120800	NEW E27 LED White Filament GLS 7W	2700	806	115	H: 108mm Dia: 60mm

E14 & E27 ULTRA EFFICIENT

See product pages and Saxbytrade.com for full range of lamps



Code	Description	K	LM	LM/W	Dimensions
120801	NEW E14 LED Filament Golf 2.2W Ultra Efficient	3000	470	214	H: 80mm Dia: 45mm
120802	NEW E14 LED Filament Candle 2.2W Ultra Efficient	3000	470	214	H: 97mm Dia: 35mm
120803	NEW E27 LED Filament GLS 3.8W Ultra Efficient	3000	806	212	H: 108mm Dia: 60mm

DIMMER MODULES

See product pages and Saxbytrade.com for recommended usage and compatibility



2YR
WARRANTY



CLASS 2



- Constructed from polycarbonate

Code	Description	Specification	Type	Dimensions
113479	Dimmer Module 100W	Max. 10 LED lamps	Trailing edge dimmer	H: 60.4mm W: 40.43mm L: 23mm
113480	Dimmer Module 250W	Max. 25 LED lamps	Trailing edge dimmer	H: 60.4mm W: 40.43mm L: 23mm

LED DRIVER CONSTANT VOLTAGE

See product pages and Saxbytrade.com for recommended usage and compatibility



43810, 47989, 79682, 98993



79328, 79329, 79335,
98994, 98995, 98996



79333, 79334, 79681



79330, 79331, 98997,
92509, 92510, 118832,
118833, 118834




118614



118615, 118616



79332



94435

Description	12V	24V	24V DIM	Dimensions
LED Driver Constant Voltage 12W	43810	98993	-	H: 22mm W: 39mm L: 98mm
LED Driver Constant Voltage 20W	47989	79682	-	H: 28mm W: 44mm L: 113mm
LED Driver Constant Voltage 25W	-	-	79332	H: 30mm W: 52mm L: 128mm
LED Driver Constant Voltage 40W	-	79328	-	H: 24mm W: 52mm L: 166mm
LED Driver Constant Voltage 50W	-	98994	79333	H: 32mm W: 61mm L: 184mm
LED Driver Constant Voltage 60W	79335	98995	-	H: 32mm W: 61mm L: 184mm
LED Driver Constant Voltage 75W	-	79329	-	H: 32mm W: 61mm L: 184mm
LED Driver Constant Voltage 100W	-	98996	79334	See product pages on saxbytrade.com
LED Driver Constant Voltage 150W	-	79681	-	H: 34mm W: 67mm L: 210mm
NEW LED Driver Constant Voltage 300W Linear 	-	118614	-	H: 28mm W: 42mm L: 296mm

Description	24V	48V	Dimensions
LED Driver Constant Voltage IP67 75W	79330	-	H: 39mm W: 64mm L: 186mm
LED Driver Constant Voltage IP67 150W	79331	118832	See product pages on saxbytrade.com
LED Driver Constant Voltage IP67 200W 	92510	118834	H: 40mm W: 72mm L: 249mm
LED Driver Constant Voltage IP67 240W	98997	-	H: 40mm W: 72mm L: 249mm
LED Driver Constant Voltage IP67 320W	92509	118833	See product pages on saxbytrade.com

Code	Description	Dimensions
118615 NEW	LED Driver Constant Voltage 12/24V 15/30W PRO 	H: 26mm W: 49mm L: 166mm
118616 NEW	LED Driver Constant Voltage 12/24V 30/60W PRO 	H: 26mm W: 49mm L: 189.5mm
94435	Cable Set	-

LED DRIVER CONSTANT CURRENT

NEW
OPTIONS

See product pages and Saxbytrade.com for recommended usage and compatibility



118617



118618



43816



46896



92722



92723



81007

- 118617 wattages: 28W/30W/32W/34W/36W/38W/40W
- 118618 wattages: 23.5W/25.5W/ 27.5W/29.5W/31.5W/34W/36W/38W/40W/42W

Code	Description		Dimensions
118617	NEW LED Driver Constant Current 28W-40W	5YR	H: 29mm W: 43mm L: 139mm
118618	NEW LED Driver Constant Current 23.5W-47W	5YR	H: 28mm W: 50.5mm L: 121mm
43816	LED Driver Constant Current 12W 350mA	2YR	H: 22mm W: 39mm L: 98mm
46896	LED Driver Constant Current 20W 350mA	2YR	H: 28mm W: 44mm L: 113mm
92722	LED Driver Constant Current 14W 200-350mA	5YR	H: 31mm W: 46mm L: 97mm
92723	LED Driver Constant Current 28W 550-700mA	5YR	H: 31mm W: 46mm L: 117mm
81007	LED Driver Constant Current 40W	5YR	H: 31mm W: 79mm L: 123mm

DALI DRIVER

See product pages and Saxbytrade.com for recommended usage and compatibility



- Output Voltage Range 9-42V

Code	Description	Wattage	Output Current	Dimensions
108754	DALI Driver	Max. 42W	700-1050mA	H: 27.5mm W: 46mm L: 145mm

12V TRANSFORMER

See product pages and Saxbytrade.com for recommended usage and compatibility



Code	Description	Finish	Dimensions
ET60R	12V Transformer 20W - 60W Dimmable	Polycarbonate	H: 20mm W: 32mm L: 118mm

Order online www.saxbytrade.com

MICROWAVE DETECTOR

See Saxbytrade.com for recommended usage and compatibility



2YR
WARRANTY



CLASS 2



MICROWAVE
SENSOR



- 360° (180° on a wall) detection angle, 8m range with a 10 sec - 15 mins timer function



Code	Description	Finish	Dimensions
90978	Microwave Detector Flush IP20	Gloss white polycarbonate	Proj: 25mm Dia: 108mm

LAMPS & ACCESSORIES SENSOR

NEW
OPTION

PIR DETECTOR 2-IN-1

See Saxbytrade.com for recommended usage and compatibility


2YR
WARRANTY


CLASS 2


PIR
SENSOR

2-IN-1



Recessed Mounted



Surface Mounted

- Installation height 2.2 - 4 meters
- Recessed and surface mounted options
- Cut hole Dia: 75mm

Code	Description	Finish	Dimensions
90977	PIR Detector 2-in-1 IP20	Gloss white polycarbonate	Dia: 93mm Proj: 36mm
118619	NEW PIR Detector 2-in-1 IP20	Black	Dia: 93mm Proj: 36mm

PRESENCE DETECTOR 2-IN-1

See Saxbytrade.com for recommended usage and compatibility


2YR
WARRANTY


CLASS 2


PIR
SENSOR

2-IN-1



Recessed Mounted



Surface Mounted

- Recessed and surface mounted options
- Cut hole Dia: 75mm

Code	Description	Finish	Dimensions
112540	Presence PIR Detector 2-in-1 IP20	Gloss white polycarbonate	Dia: 93mm Proj: 36.5mm

Order online www.saxbytrade.com

PIR SENSOR

See Saxbytrade.com for recommended usage and compatibility



2YR
WARRANTY



CLASS 2



IP65
RATED



PIR
SENSOR



- 10 lux on, 2000 lux off, 360° detection angle, 8m maximum range with a 10 sec±3sec - 7 min±2min timer function, install height :2.2-4m



Code	Description	Finish	Dimensions	Cut out
108279	PIR Sensor	White plastic	H: 48.24mm Dia: 80mm	61.5mm

LAMPS & ACCESSORIES SENSOR

PIR DETECTOR 3-IN-1

See Saxbytrade.com for recommended usage and compatibility


2YR
WARRANTY


CLASS 2


IP54
RATED


PIR
SENSOR

3-IN-1



CEILING MOUNTED



CORNER MOUNTED



WALL MOUNTED



- Constructed from polycarbonate & pmma plastic
- 10 lux on, 2000 lux off. 180° - 360° detection angle, 12m maximum range with a 10 sec - 15 min timer function

Code	Description	Finish	Dimensions
95283	PIR Detector 3-in-1	Black polycarbonate	Proj: 134.7mm H: 75.5mm W: 72.2mm

Order online www.saxbytrade.com

PIR MINI RECESSED

See Saxbytrade.com for recommended usage and compatibility



2YR
WARRANTY



CLASS 2



PIR
SENSOR



- 10 lux on, 2000 lux off, 360° detection angle, 6m maximum range with a 10 sec±3sec - 7min±2min timer function, install height :2.2-4m

**INTERCHANGEABLE
BEZELS**

White, silver and black bezels included



Code	Description	Finish	Dimensions	Cut out
108278	PIR Mini Recessed	White plastic	H: 61mm Dia: 50mm	40mm

LAMPS & ACCESSORIES SENSOR

PIR MINI

See Saxbytrade.com for recommended usage and compatibility



- Constructed from abs plastic
- 10 lux on, 2000 lux off. 120° - 360° detection angle, 2~10m detection distance with a 10 sec - 7 min timer function

Code	Description	Finish	Dimensions
95284	PIR Mini	White abs plastic	Proj: 56mm W: 44mm H: 35mm

Order online www.saxbytrade.com

PIR SECURITY DETECTORS

See Saxbytrade.com for recommended usage and compatibility



2YR
WARRANTY



CLASS 2



IP44
RATED



PIR
SENSOR



- 180° detection angle, 12m maximum range with a 10 sec - 7 min timer function
- 2000W incandescent and 1000W LED maximum
- 10lux - 2000lux adjustable
- Installation height 1.8 - 2.5 metres

Code	Description	Finish	Dimensions
90974	PIR Security Detector Wall	Black ABS plastic	Proj: 77mm H: 70mm W: 55mm
90975	PIR Security Detector Wall	White ABS plastic	Proj: 77mm H: 70mm W: 55mm

LAMPS & ACCESSORIES SENSOR

PHOTOCELL

See Saxbytrade.com for recommended usage and compatibility


2YR
WARRANTY


CLASS 2


IP44
RATED



- 10 - 100 lux on, 40 - 250 lux off
- Rated current 10A

Code	Description	Finish	Dimensions
90981	Photocell Sensor	Black ABS	Dia: 86mm H: 130mm

Order online www.saxbytrade.com

TWILIGHT DETECTOR

See Saxbytrade.com for recommended usage and compatibility


2YR
WARRANTY


CLASS 2


IP44
RATED



- Fully adjustable 5 - 300lux
- Rated current 15A

Code	Description	Finish	Dimensions
90979	Twilight Detector Wall	Black ABS plastic	Proj: 27.5mm H: 102mm W: 70mm
90980	Twilight Detector Wall	White ABS plastic	Proj: 27.5mm H: 102mm W: 70mm

LAMPS & ACCESSORIES SENSOR

INLINE IP68 CONNECTOR

See Saxbytrade.com for recommended usage and compatibility


2YR
WARRANTY


CLASS 2


IP68
RATED



- Suitable cable size 0.5 - 2.5mm

Code	Description	Finish	Dimensions
90131	Inline IP68 Connector Straight	Black nylon	L: 84mm Dia: 26mm
90132	Inline IP68 Connector Tee	Black nylon	L: 110mm H: 26mm W: 70mm

Order online www.saxbytrade.com



TECHNICAL & INDEX

TECHNICAL	384
T&C'S	391
INDEX	392

Icons Guide


Each of our products have appropriate icons displayed against them. Our handy icon guide helps to explain what each of our icons mean.

 5YR WARRANTY	1, 2, 3 or 5 year warranty, refer to T&Cs	 MARINE GRADE	High grade stainless steel, suitable for marine environment
 CLASS 1	Class 1, earthed product	 DIMMABLE	Dimmable with a compatible lamp/dimmer switch
 CLASS 2	Class 2, double insulated product	 80 CRI	Color Rendering Index
 CLASS 3	Class 3, super extra low voltage product (driver required)	 6 SDCM	Standard Deviation Colour Matching
 SMD	Surface mounted device LED chip	 MOTION SENSOR	Sensor detecting motion
 COB	Chip on board LED chip	 PIR SENSOR	Sensor detecting heat energy
 FIRE RATED 30,60,90 MINS	Suitable for use in 30, 60 or 90 minute fire rated ceilings	 MICROWAVE SENSOR	Sensor detecting movement via radiation waves
 STEEL WEB JOIST CERTIFIED	Steel web joist certified	 PHOTOCELL SENSOR	Dusk to dawn sensor
 I-JOIST CERTIFIED	I-Joist certified	 REMOTE CONTROL	Includes a remote control device
 COVER IN INSULATION	Can lay thermal insulation on top	 ROCKER SWITCH	Type of switch to turn on/off
 IP65 RATED	Denotes IP rating (see page 386)	 PULL CORD	Pull cord or string switch
 IK10 RATED	Meets EN 62262 impact resistance	 TOGGLE SWITCH	Type of switch to turn on/off
 3HR BATTERY	3 hour battery charge	 DE-MIST PAD	Built in feature preventing condensation & mist
 EMERGENCY MAINTAINED	Emergency Maintained	 SHAVER SOCKET	Integrated shaver socket
 EMERGENCY NON MAINTAINED	Emergency Non Maintained	 60° BEAM	60° beam angle
 WALK OVER	Can be walked over	 30° TILT	30° tilt angle
 DRIVE OVER	Can be driven over	 355° ROTATION	355° rotation angle

Lamp Temperature

When thinking about lamp and fitting choice it's important to understand that every light source has two distinct elements. The first part is brightness which is measured in lumens; this is a measure of the amount of light that it will give out.

The second part is the colour temperature, which is measured in kelvin and indicates how cool or warm the light is. Warmer fittings and lamps have low kelvin numbers, whereas cooler lamps and fittings will have a kelvin that is high. Choosing the right fitting or lamp helps to create the right effect within your chosen room.

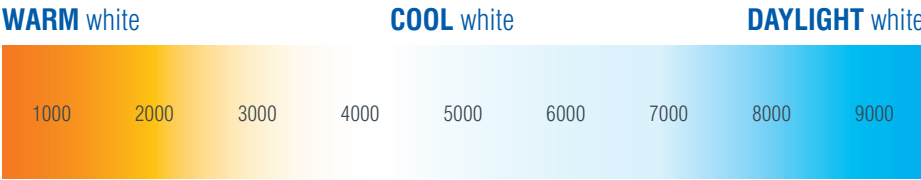

WARM white (<3800k)



Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas.

COOL white (3900k to 5800k)



Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in modern contemporary kitchens and bathrooms to complement the décor.

DAYLIGHT white (>5900k)



Perfect for industrial and healthcare applications where the most natural lighting is required.

Finding your LED equivalent

LED	3W	5W	7W	9W	12W
INCANDESCENT	25W	40W	60W	75W	100W
HALOGEN	18W	28W	42W	55W	70W
LUMENS	200	400	600	800	1000
CFL	5W	8W	12W	15W	20W

Ingress Protection (IP) Rating

Each light within our brochure has been given an appropriate IP rating; this relates to the degree of protection the light provides against solid object and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and exterior environments. Written as IPxx, the first x defines the level of protection offered from dust; the second x defines the level of protection offered from moisture. The higher the numbers are, the better the protection will be.



INGRESS PROTECTION

IP65

SOLID OBJECT

1	Protected against a solid object greater than 50mm such as a hand
2	Protected against a solid object greater than 12.5mm such as a finger
3	Protected against a solid object greater than 2.5mm such as a screwdriver
4	Protected against a solid object greater than 1mm such as a wire
5	Dust protected. Limited ingress of dust permitted. Will not interfere with operation of the equipment
6	Dust tight. No ingress of dust

MOISTURE

1	Protected against vertical falling drops of water. Limited ingress permitted
2	Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical. Limited ingress permitted
3	Protected against sprays of water up to 60 degrees from the vertical. Limited ingress permitted
4	Protected against water splashes from all directions. Limited ingress permitted
5	Protected against jets of water. Limited ingress permitted
6	Protected against powerful jets of water. Limited ingress permitted
7	Watertight against the effects of immersion in water between 15cm and 1m for 30 minutes
8	Watertight against the effects of immersion in water under pressure for long periods

Choose the right IP rating for your location

In most cases a product with a rating of IP44 will be suitable for the majority of locations, but there are certain circumstances where a lower or higher rating would be more appropriate. For products fitted in porches or downlights fitted in soffits, the property will give a certain amount of protection and these can be rated IP23.

For commercial properties we offer wall and ground light products with improved seals that have a higher rating of IP65. Our IP67 rated products are the most resilient, and can withstand almost all weather conditions.



Benefits of LED Lighting

- ENERGY EFFICIENCY - The energy saving from an LED lamp is substantial; compared to an incandescent lamp, you will only use around 20% of the energy. They are even more efficient than fluorescent lamps too, saving 20% on the running cost for a similar light output.
- MUCH LONGER LIFESPAN - LED lamps have a much longer lifetime, on average 15 times longer than the original incandescent lamps, so they don't need to be replaced as often.
- INSTANT LIGHT - Fluorescent energy saving lamps take a long time to reach full brightness, whereas LED alternatives produce light at full intensity instantly.
- ENVIRONMENTALLY FRIENDLY - Not only do LED lamps and fittings last much longer, but they use less energy than other light sources.
- SAFE - Unlike fluorescent lamps, LED lamps do not contain mercury. This makes them easy to recycle and safe to have around the home too.

LEDs explained

Technology has progressed further, to a point where there is a direct LED equivalent to existing halogen and incandescent lamps. The future is bright too; new technology will see brighter LEDs using even less power than they currently do.

- 

SMD - An established technology now, these LEDs offer a variety of package sizes and light outputs. They are normally used in an array form, to give an even spread of light.
- 

COB - This LED has a number of separate chips embedded in phosphor and mounted on a ceramic package. This gives greatly improved lumens per watt, better cooling and superior light output.
- 

LED HI POWER - These types of LED offer superior light output, but have higher power requirements. Normally available in 1W or 3W, these require a heatsink to run at the correct temperature.
- 

RGB SMD - Red, green, blue (RGB) LEDs have three separate LEDs embedded in one chip. They allow precise selection for the ultimate in accent lighting.
- 

DOB SMD - Driver On Board is a new technology using both SMD and COB LEDs, but without an external driver. The power control circuitry is integrated onto the printed circuit board (PCB) and these are connected directly to the mains power source.

Lamp Data Explained

The lumen figures quoted in the catalogue are for guidance only. The lumen figure is for the entire product and the Lm/W can be used when selecting products which are Part L compliant.

Code	Description	K	LM	LM/W	Dimensions
78541	SirioDISC Adjustable 18W	4000	1450	81	H: 15mm Dia: 230mm

- K: 4000 Lm: 1450 Lm/W: 81

Colour Rendering Index (CRI)

This figure is a percentage and relates to the ability of the lamp or product to show accurate colours when compared to a reference light source. All of our lamps and integrated products have a CRI in excess of 80 and 65 for outdoor lighting.

Energy Saving - All products supplied with a lamp or light source must have a declared energy rating. This can be found on the packaging. The most energy efficient products are rated A+++. We also include Lm/W figures for all lamps and products with a light source so you can make an informed choice on the best product for your application.

Building regulations

Part B - This regulation refers to the fire safety requirements that new buildings must meet. Recessed products that break the fire barrier during installation must ensure that they are capable of maintaining the original barrier against fire.

Part C - This regulation covers requirements on the flow of air and moisture in a building.

Part E - This regulation also refers to recessed products and their ability to minimise sound passing through from one part of a property to another.

Part L - This regulation outlines minimum energy efficiency requirements for all commercial and domestic properties. All lights fitted must meet minimum Lm/W requirements.

Part P - This regulation refers to the safe installation of all electrical fittings and lighting and the inspection, testing and certification of a property.

Glossary

ELECTRICAL

a.c. - Is the acronym for alternating current.

d.c. - Is the acronym for direct current.

Watt - This is the amount of energy that a product consumes.

mA - This is the rate of flow of electricity, measured in amps. You would normally come across this as the output of a constant current LED driver.

Volts - The volt is a measure of electric potential. The UK mains voltage is 240V.

Constant current - This refers to the output from an LED driver, in these the current output remains the same, i.e. 350mA, and the voltage increases as the power increases.

Constant voltage - This refers to the output from an LED driver, in these the voltage output remains the same, i.e. 12V, and the current increases as the power increases.

Hertz - This is the unit of frequency. The UK mains a.c. supply voltage is set at 50Hz.

Class 1 - This fitting has basic insulation and relies on an earth connection for safety.

Class 2 - This fitting has two layers of insulation and does not require an earth connection. Often known as double insulated.

Class 3 - Sometimes known as Safety Extra Low Voltage (SELV), the operating voltage of these products is lower than 50V and is isolated from the mains supply.

kWh - 1000W of electricity used over the period of one hour.

Abbreviations

- ◆ H: Height ◆ W: Width ◆ L: Length ◆ D: Depth ◆ Proj: Projection ◆ Dia: Diameter
- ◆ Sq: Square ◆ K: Kelvin ◆ Lm: Lumens ◆ Lm/W: Lumens per Watt

Light Source

LED - Is the acronym for Light Emitting Diode.

Kelvin - This figure defines the colour temperature of visible light. The units are K.

SDCM - This is an acronym for Standard Deviation Colour Matching and is a way of measuring the differences between LEDs of the same colour. Sometimes called the MacAdam Ellipse.

Lumen - A measure of the quantity of visible light from a lamp or product.

RGB - Is the acronym for red, green and blue for an LED that can change colour .

CRI - Is the acronym for Colour Rendering Index. It relates to the ability of the lamp or product to show accurate colours when compared to a reference light source.

Lux - A measure of the intensity of light, defined as 1lm /m2.

LM80 - This is a standard for measuring the lumen depreciation of a solid state light source.

Efficiency - Lamp and luminaire efficiency is measured in Lm/W. This gives an accurate comparison between different types of fittings for energy usage.

Sensors

PIR - Also known as passive infrared, the sensor detects the heat energy that all living bodies give off. When a person walks in front of the fitting, the sensor detects the change in the radiation and turns on the light.

Photocell - Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached. The light will remain on until the light increases to another pre-set level where it will turn off.

Microwave - These have a similar operation to the PIR but work by detecting motion. They send a continuous wave of radiation out and if there is any movement in their range they detect the change in frequency and operate the light. They can be fitted internally as the microwaves will pass through some materials, and can even pass through walls.

Infra-red - These are short range movement sensors and are used for hands free operation of lights where you may have wet hands. The IR sensor is a little module with an emitter and a detector, it emits a beam of infra-red (like your TV remote), and when the beam is broken the detector will activate the sensor.

Touch (Resistive) - A resistive touch switch relies on the natural conductivity of the skin and must be used with a conductive material.

Touch (Capacitive) - Capacitive switches have the advantage of being able to work with non-conductive materials such as wood and plastics. These work by using the electrical charge (static electricity) that the human body naturally has. On touching the sensor, the electrical parameters change and the switch will operate.

Miscellaneous

IP - Is the acronym for ingress protection. The first number refers to the dust proofing and the second to the protection against water.

IK - This is the numerical classification for impact protection of outdoor light fittings.

Maintained - Emergency lights that operate as a normal light fitting and can be controlled with all the other lights in the area, however when the power fails the maintained emergency fitting will continue to operate but at a lower light level.

Non Maintained - Is normally switched off, with its batteries being continuously charged and a green LED showing fully charged. When the power fails then the fitting switches on using its battery supply. Non-maintained fittings are not part of the general lighting but are fittings such as emergency exit signs.

Terms & Conditions

Whilst every effort has been made to ensure that the information provided in this catalogue is accurate, we do not accept liability for errors or omissions in the descriptions, data, dimensions or any other information in the catalogue. No warranty, express or implied, is given that the information provided in this catalogue is error free. We try to ensure that colours and dimensions are correct at time of print, but these are given for guidance and comparison only and are subject to change without notice. Some of our products are handmade and are therefore subject to natural variation in colour and appearance. As a process of continual improvement, we reserve the right to amend and change the specification of products without notice. Prior to making any structural changes, please ensure physical confirmation of correct dimensions.

All exterior products are covered by our guarantee. Unless specifically defined as high quality marine grade stainless steel, these guarantees are null and void if the products are installed or stored within or near a marine or sea and coastal environments or where there is salt, fertilisers and/or chemical pollution in the environment.

Full terms and conditions available upon request.

Quality Statement

Our company is committed to achieving great customer satisfaction by always putting our customers at the heart of everything we do. We are continually developing our systems and processes with the ultimate aim of getting it 'right first time, every time'.

Outdoor Lighting

Our cast aluminium, stainless steel and nylon fibre products have a 2 year guarantee against corrosion. These guarantees are null and void if products are installed where there is salt, fertilisers and/or chemical pollution in the air or have been sprayed with chemical cleaners and the product has not been maintained.

Dimmer Switches

If your product is dimmable and requires a third party dimmer switch, compatibility is not guaranteed with all Saxby products. For further advice, please contact a qualified electrician or the manufacturer of the dimmer switch you intend to use. Do not use dimmer switches for tubular fluorescent lamps or energy efficient replacement compact fluorescent lamps. The dimmer switch will eventually burn out if used for these applications!

Products incorporating LEDs - A lot of our LED lamps and fittings can now be dimmed and we would recommend using a specific LED dimmer switch. Please verify with us that the product can be dimmed before consulting a qualified electrician or dimmer manufacturer for correct selection of dimmer switch.

Products incorporating Integral Low Voltage Electronic Transformers (G4 halogen lamps) - We do not generally recommend dimming these products, but if dimming is necessary, then a specialised dimmer switch may be required. Please verify with us that the product can be dimmed before consulting a qualified electrician or dimmer manufacturer for correct selection of dimmer switch.

Products Using Mains Voltage Halogen Bulbs (GU10, G9, ECO halogens and Linear Halogen Lamps) - Dimmer switches must not be overloaded. Some dimmer switches are designed to run warm and it is quite usual for the front plate to reach temperatures of approximately 50° Celsius during normal operation. When using halogen lamps make sure that the dimmer is rated at least twice the total wattage of the lamps to be dimmed, e.g. if using 3 x 50w GU10 halogen (150W), then make sure the dimmer is rated at 300W. See table below:

Maximum Load on Dimmer Switch Label	Maximum Load for Mains Halogen
300W	150W
500W	250W
1000W	500W

It is also quite normal to hear a slight buzzing sound coming from the dimmer switch in operation.

Product Code Index

Product Code	Page
10400	155
10401	153
12421	207
13759	226
13760	225
13798	253
13799	253
13801	238
13802	239
13822	277
13889	318
13914	241
13921	252
13922	252
13923	252
13924	270
13928	255
13929	255
14015	244
14016	244
14017	244
14018	245
34200	206
34483	206
39237	228
39363	213
39608	209
40045	274
42315	128
43277	138
43278	139
43279	140
43281	138
43282	139
43283	140
43810	369
43816	370
46395	145
46896	370
47989	369
48024	130
48739	290
48740	290
49145	132
49909	251
49910	251

Product Code	Page
49911	251
49945	269
49946	269
50606	149
52211	326
52212	326
52213	310
52305	167
52306	167
52329	46
52330	46
52331	46
52332	46
52333	46
52334	46
52485	48
54553	272
54554	272
54555	273
54675	207
54676	207
55689	298
55690	298
59136	316
59138	316
59850	207
59995	79
59996	79
60894	229
60899	224
60991	141
60992	141
60993	141
60995	141
60997	140
60998	138
60999	139
61000	142
61001	142
61002	142
61003	142
61211	306
61214	306
61219	306
61636	154
61638	152

Product Code	Page
61639	152
61646	293
61647	293
61648	293
61649	293
61650	293
61651	293
61652	293
61653	293
61865	263
61866	263
67360	320
67361	321
67685	261
67686	261
67687	261
67701	254
67702	254
67703	254
67704	254
69231	293
69232	293
69500	162
70257	352
70258	352
70259	352
70260	352
70417	48
70418	48
70847	245
70848	245
71553	314
71554	314
71886	130
71888	133
71889	132
71890	133
71891	133
71892	132
71893	132
71894	133
71895	133
71896	132
71899	128
72180	293
72181	293

Product Code Index

Product Code	Page
72360	227
72641	344
73347	313
73348	313
73349	313
73445	244
73446	244
73463	320
73464	321
73534	83
73536	97
73666	166
73667	165
73684	143
73685	143
73686	143
73687	143
73688	143
73689	143
73716	290
73717	290
73719	63
73720	63
73810	63
74045	352
74048	352
75099	238
75272	258
75429	244
75430	239
75431	238
75432	239
75433	239
75434	238
75435	238
75436	242
75437	242
75438	241
75439	239
75440	239
75441	238
75442	238
75443	242
75444	242
75448	242
75449	242

Product Code	Page
75527	303
75530	319
75533	96
75535	132
75536	133
75537	133
75538	132
75917	40
75922	162
75923	162
75924	162
75930	259
75931	259
76006	46
76007	46
76615	313
76616	313
76617	313
76790	360
76791	360
76797	366
76798	366
76799	363
76800	362
76801	364
76802	364
76803	364
76806	363
77897	114
77898	114
77899	114
77901	114
77902	114
77904	115
77906	238
77910	115
77911	115
77913	115
77914	295
77915	295
77916	295
78263	52
78286	115
78415	240
78416	242
78417	242

Product Code	Page
78530	49
78531	49
78532	49
78542	62
78546	75
78617	273
78636	331
78637	303
78638	304
78640	304
78644	304
78649	130
78650	129
78654	131
78655	131
78657	131
78658	131
78660	131
78661	131
78667	246
78757	267
78774	100
78856	354
78857	354
78858	354
78859	355
78860	355
78861	355
78862	355
78863	355
78864	355
78954	44
78955	44
78970	281
78978	78
79195	329
79196	264
79305	31
79328	369
79329	369
79330	369
79331	369
79332	369
79333	369
79334	369
79335	369

Product Code Index

Product Code	Page
79681	369
79682	369
79978	32
79979	32
79980	32
80247	33
80248	33
80497	201
80498	201
80499	198
80500	199
80501	200
80775	277
81007	370
81008	248
81009	248
81010	248
81011	248
81012	252
81013	252
81014	275
81019	361
81020	361
81021	361
81022	132
81023	69
81024	69
81025	69
81555	20
81556	360
81569	205
81570	205
81571	205
81572	41
81744	74
81850	74
90126	160
90127	161
90130	240
90131	381
90132	381
90633	342
90955	63
90962	329
90963	329
90964	329

Product Code	Page
90974	378
90975	378
90977	373
90978	372
90979	380
90980	380
90981	379
90982	356
90983	356
91237	74
91341	162
91358	338
91513	45
91796	214
91797	215
91860	279
91861	279
91862	279
91863	279
91864	281
91865	281
91866	281
91949	358
91952	79
91954	323
91955	323
91957	323
91958	323
91959	323
91961	317
91962	305
92012	320
92019	317
92273	70
92274	70
92276	70
92277	70
92310	276
92312	151
92313	151
92509	369
92510	369
92518	45
92519	45
92520	78
92521	78

Product Code	Page
92531	253
92532	252
92533	255
92534	255
92535	357
92536	357
92537	355
92538	44
92542	71
92543	72
92722	370
92723	370
92822	74
92823	74
94059	329
94060	329
94340	366
94341	366
94342	363
94343	363
94344	362
94345	362
94348	267
94422	319
94430	314
94431	314
94434	314
94435	369
94754	44
94792	239
94793	239
94795	49
94796	49
94797	49
94946	201
94947	198
94948	199
95283	375
95284	377
95285	306
95539	108
95540	108
95541	108
95542	108
95543	108
95544	108

Product Code Index

Product Code	Page
95545	109
95546	109
95547	109
95548	109
95549	109
95550	109
95551	109
95552	109
95553	109
95555	240
95918	46
95919	46
97732	200
97734	201
97735	201
97736	198
97737	200
97738	201
97739	198
97821	246
97822	246
97824	264
97853	275
98432	360
98433	360
98434	360
98435	359
98436	359
98437	243
98438	243
98439	257
98442	247
98443	280
98444	280
98445	280
98446	280
98447	281
98993	369
98994	369
98995	369
98996	369
98997	369
99013	182
99014	182
99022	186
99023	186

Product Code	Page
99024	186
99025	186
99030	196
99031	196
99032	187
99033	187
99034	187
99044	194
99048	195
99049	195
99052	173
99053	195
99054	179
99544	282
99545	306
99550	328
99557	45
99559	45
99561	320
99564	332
99756	257
99760	32
99761	309
99763	309
99764	309
99765	315
99816	97
99817	97
101328	138
101329	139
101330	140
101331	141
101332	142
101333	143
101334	143
101335	143
101336	89
101338	89
101342	25
101349	237
101350	237
101351	237
101352	237
101456	108
101619	361
101620	361

Product Code	Page
101624	182
101626	124
101627	124
101628	124
101629	124
101630	124
101631	124
101632	124
101633	124
101634	124
101635	124
101636	124
101637	124
102454	108
102659	182
102660	182
102661	182
102663	183
102665	199
102667	199
102669	30
102670	30
102671	30
102672	30
102730	110
102732	111
103022	88
103023	88
103026	355
103027	355
103028	41
103029	22
103030	160
103031	161
103174	21
103835	51
103836	51
103837	51
103838	51
103839	190
103840	190
103841	179
103842	179
103843	179
103847	129
103848	129

Product Code Index

Product Code	Page
103850	88
103851	327
103852	309
103853	309
103854	309
103935	110
103936	110
103937	110
103938	111
103939	111
103940	111
103941	43
103943	111
103944	347
104024	89
104025	89
106526	68
106527	68
106530	188
106531	188
106532	189
106533	189
106534	189
106537	22
107125	85
107126	85
107127	85
107131	85
107132	85
107133	85
107137	85
107138	86
107139	86
107140	86
107141	86
107142	86
107143	86
107144	110
107409	199
107632	286
107633	286
107634	286
107635	286
107636	286
107637	286
107638	286

Product Code	Page
107650	105
108087	337
108097	346
108278	376
108279	374
108281	196
108282	183
108283	195
108284	195
108285	195
108286	198
108287	200
108288	61
108289	61
108290	61
108291	61
108292	61
108293	61
108294	27
108295	27
108296	27
108297	27
108601	287
108672	287
108673	287
108674	287
108675	287
108736	127
108737	127
108738	127
108739	127
108740	127
108741	125
108742	125
108743	65
108745	301
108746	301
108747	300
108748	300
108749	337
108750	340
108751	340
108752	340
108753	340
108754	371
108763	39

Product Code	Page
108867	87
108868	87
108869	87
108870	87
108871	87
108872	87
109801	53
109804	23
109805	37
109806	36
109807	37
109808	36
110964	95
110965	116
110966	116
110967	116
110968	116
110969	116
110970	116
110972	134
110973	134
110974	353
111484	89
111569	37
111570	37
111571	37
111572	37
111573	37
111574	37
111575	37
111576	37
111577	36
111578	36
111579	36
111580	36
111581	36
111582	36
111662	99
111663	99
111664	100
111665	100
111666	100
111667	100
111668	100
111670	183
111671	195

Product Code Index

Product Code	Page
111672	179
111673	164
111674	164
111675	192
111676	192
111677	193
111678	193
111679	193
112538	105
112539	208
112540	373
112541	24
112542	24
112543	30
112544	30
112545	351
112546	351
112547	351
112548	351
112549	351
112550	351
112551	19
112626	36
113266	105
113267	184
113268	184
113269	184
113270	196
113272	36
113273	36
113274	36
113276	37
113277	37
113278	37
113279	37
113280	37
113281	37
113284	37
113285	37
113286	37
113287	37
113288	37
113289	37
113290	36
113291	36
113292	36

Product Code	Page
113293	36
113294	36
113295	36
113296	36
113297	36
113298	36
113299	36
113300	36
113301	36
113302	36
113303	36
113304	36
113305	36
113306	36
113307	36
113308	36
113309	36
113313	36
113314	36
113315	36
113316	36
113317	36
113318	36
113319	37
113320	36
113321	37
113322	36
113478	256
113479	368
113480	368
113562	105
113563	105
113564	199
113565	299
113566	353
113567	351
113568	351
113569	351
113570	351
113571	351
113572	351
113573	216
113639	23
113640	19
113685	193
113688	173

Product Code	Page
113689	173
113807	119
113952	86
113953	86
113954	86
113955	86
113956	87
113957	87
113958	87
113959	87
113960	113
113961	113
113962	113
113963	113
113964	113
113965	113
113966	113
113967	113
113968	113
113969	365
114563	59
114564	350
114565	350
114566	350
114567	350
114568	135
114569	294
114570	294
114571	294
114572	294
114573	113
114574	262
114575	325
114576	325
114577	325
114578	327
114579	327
114580	24
114581	24
114582	24
114583	24
114584	23
114585	23
114586	23
114587	23
114588	23

Product Code Index

Product Code	Page
114589	23
114590	19
114591	19
114592	19
114593	19
114594	19
114595	19
114596	339
114597	341
114598	323
115106	185
116614	183
116615	183
116744	85
117528	196
118608	289
118609	289
118610	289
118611	103
118612	103
118613	103
118614	369
118615	369
118616	369
118617	370
118618	370
118619	373
118620	219
118621	219
118622	220
118623	220
118624	223
118815	75
118816	174
118817	174
118818	173
118819	173
118820	176
118821	176
118822	172
118823	172
118824	176
118825	176
118826	300
118827	300
118828	301

Product Code	Page
118829	301
118831	196
118832	369
118833	369
118834	369
118838	267
119091	122
119092	122
119093	122
119094	122
119097	82
119098	251
119099	277
119100	275
119101	22
119102	22
119103	156
119104	157
119105	38
119327	71
119328	71
119329	73
119330	73
119331	71
119332	71
119333	363
119334	363
119335	363
119336	362
119337	362
119338	362
119339	366
119340	366
119341	366
119342	366
119343	366
119344	366
119345	251
120333	208
120334	121
120335	121
120336	121
120337	121
120338	172
120339	172
120340	178

Product Code	Page
120341	178
120342	180
120343	180
120344	181
120345	181
120346	181
120347	196
120348	196
120349	264
120374	264
120553	92
120554	92
120555	92
120798	367
120799	367
120800	367
120801	367
120802	367
120803	367
120807	32
120808	88
120809	100
120810	264
120811	230
120812	196
120813	127
120814	211
120815	210
120816	80
120961	118
120962	118
120963	146
120964	146
120965	146
120966	147
120967	147
120968	147
120996	92
120997	92
120998	92
120999	92
121000	105
121016	212
121020	117
121021	297
121022	297

Product Code Index

Product Code	Page
121023	297
121024	297
121026	235
121027	235
121028	235
121029	235
121030	235
121031	235
121032	235
121033	235
121034	343
121113	77
121114	77
121115	77
121116	77
121117	77
4478182	268
4479782	268
1818PIR	271
1818S	271
3TH113W	130
3TH139W	129
3TRAWI	132
3TRAWIS	133
3TRAWL	133
3TRAWP	133
80497-30PK	201
80501-30PK	200
CH200E27BK	275
CH201E27BK	275
EL-40074	256
EL-40075	256
EL-40076	256
EL-40088	266
EL-40103	306
EL-40104	306
EL-40107	306
ET60R	371
FH150	55
G2521013	138
G2521313	139
G2523413	140
G5503177	144
LHGU10	52
LHGU53	52
OL60AB	310

Product Code	Page
POLGU10	333
ST031F	259
ST031FPIR	259
ST5008BK	246
ST5008S	246
ST5009BK	246
ST5009SS	246
ST5010S	246
ST5011	247

Product Name Index

Product Name	Page
12V transformer	371
Albus CCT	309
Aloka CCT	82
AltumPRO Accessory	100
AltumPRO CCT	99
Amalfi	138
Aniani CCT	223
Apollo	105
Apollo CCT	105
Arezzo	143
Arezzo Track Head	129
Atlantis	244-245
Austen	80
Avit CCT	299
Axial CCT	61
Axial Rectangluar	62
B22 LED FILAMENT GLS	362
B22 LED GLS 8W	362
Batten 2-in-1 EM kit	85
Batten Plug-in EM	88
Batten Plug-in PIR sensor	88
Bayswater	274
Bianco	259
Bianco LED CCT	259
Bliss	253
Borde CCT / Dual Wattage	79
Box	155
Breton	267
Breton PIR	267
Bulkhead Conversion Plate	117
Bullett	130
Cable set	369
Cast	46
Ceto CCT	208
Circo	51
Clarus	156
CoHLED	124
CoHLED CCT	125
Conor	129
Converse	48
Core CCT	116
Core CCT Bezel	116
Cove	320
Crescent	154
Dali Driver	371
Dango	134

Product Name	Page
Dax CCT Bollard	276
Dimmer Modules	368
Downlight Bracket	32
DualLED	89
E14 LED CANDLE 4.9W	366
E14 LED FILAMENT CANDLE 4W	366
E14 LED FILAMENT GOLF 4W	366
E14 LED FILAMENT ULTRA EFFICIENT	367
E14 LED GOLF 4.9W	366
E14 LED WHITE FILAMENT	367
E27 LED FILAMENT GLOBE 125MM 7W	364
E27 LED FILAMENT GLOBE 95MM 7W	364
E27 LED FILAMENT GLS	363
E27 LED GLS	363
E27 LED PEAR 6W	364
E27 LED STICK 8W	365
Eco	310
EcoLinear	83
EM Conversion Kit	347
EM Kit	346
Endura	92
Equinox	251
Espello CCT	219
Evesham	273
Evesham PIR	273
Flexline 12V	165-167
ForcaULTRA	114
ForcaULTRA CCT Bezel	115
Forge	297
Forge XL	297
Fortis	289
Frost	212
G4 LED	359
G9 LED	360-361
Glimpse	227
Glover CCT	264
GU10 CCT 7W	353
GU10 GLASS	356
GU10 lampholders	52
GU10 LED 4.8W	350
GU10 LED 5W	351
GU10 LED 5W	354
GU10 LED 5W	355
GU10 LED 6W	355
GU10 LED 7W	352
GU10 LED 8W	355

Product Name Index

Product Name	Page
Guard	286
Guard PIR Override	287
Hades	323
Halbury PIR	272
Hayden	257
Hayz	321
Heatguard	55
Hera CCT	160
Hoxton	329
Icarus	248
Ice	213
Ikon Round	318
IkonPRO	316
IkonPRO CCT	313-315
IKONPRO RGB	317
Inline IP68 Connector	381
Inova PIR	269
Jude CCT	216
Juno LED	127
Juno LED	135
Juno LED Casing	127
Kingsley	78
Kios 2	319
Knight	205
LALO	45
LALO Tilt	45
LED Driver Constant Current	370
LED Driver Constant Current Dimmable	370
LED Driver Constant Voltage	369
LED Driver Constant Voltage 12/24V	369
LED Driver Constant Voltage 24V	369
Linus	77
Lipco	209
Louvre	275
Lucca CCT	294
Lucca Mini	295
Luik	293
Luminatra CCT	331
Lumos	146
Lumos Mini	147
Lunaro	121
Lunaro 3-Phase	122
Lustro CCT	220
Madison	149
Marka CCT	325
Microwave detector	372

Product Name	Page
Microwave Sensor	88
Mini crescent	153
Moda CCT	214
Monte	128
Morti	261
Morti CCT	261
Motion PIR	290
MotionLED CCT PIR	290
MR16 LED 7W	357
Nico CCT	224
Nocula CCT	262
Nyx CCT	161
Odyssey	246-247
Oillo	118
Omega	228
Onan	215
Opaz MV	333
OrbitalPRO	30
Ori	210
Orion Accessories	196
Orion20 48V	172
Orion65 24V	186
Orion67 48V	174
OrionFLEX 24V IP20	184
OrionPRO 24V IP20	182
OrionPRO 48V	173
OrionPRO 5M Kits	164
OrionPRO 67 48V	174
OrionPRO Neon Flex 24V IP67	188
OrionPRO RGBW 24V IP20	192
OrionRGB LED	194
OrionRGBW 24V IP20	190
OrionRGBW 48V IP20	178
OrionRGBW 48V IP67	180
Pagoda PIR	270
Palermo	144
Palin	237-243
Paragon CCT	59
Perle CCT	225
Photocell	379
Pillar	326-327
Pillar tilt	328
Pillo PLUS CCT	300
PIR	377
PIR detector	373
PIR detector	375

Product Name Index

Product Name	Page
PIR IP65	374
PIR Mini	376
PIR security detector	378
Portico	207
Portico LED CCT	207
PowerLINK Connector	53
Presence sensor 2-in-1	373
Puck CCT	119
Pure	206
Pyramid	255
Ravel	41
Reeve 2	97
Reeve Connect	96
Reeve ECO	95
Revan	230
Revelo	229
Rigel	198-201
Roko	254
Rond PLUS CCT	301
RularPLUS	85
RularPRO	86
Salde	279-281
Saxby HeroPRO	108
Saxby HeroPRO Bezel	109
Saxby HeroPRO Mini	110
Saxby HeroPRO Mini Bezel	110
Saxby HeroPRO XL	111
Saxby HeroULTRA	113
Saxby HeroULTRA Bezel	113
Saxby ShieldONE 65	37
Saxby ShieldONE 65 Bezel	37
Saxby ShieldONE 75	36
Saxby ShieldONE 75 Bezel	36
Saxby ShieldONE Accessory	36
Scope	235
Scope PIR/Photocell	235
Seina	304
Seina CCT	303-304
Sentinel CCT	258
Seran	298
Severus CCT	306
Shale CCT	145
Shield360	22
ShieldECO	27
ShieldECO 3CCT	23
ShieldECO Bezel	23

Product Name	Page
ShieldECO CCT	23
ShieldECO CCT	25
ShieldECO Trimless bezel	40
ShieldLITE	39
ShieldONE 75 Open Can	38
ShieldPRO	19
ShieldPRO Anti Glare	24
ShieldPRO Anti Glare Insert	24
ShieldPRO Bezel	19
ShieldSLIM	21
Sight Recessed	344
SightPRO	337
SightPRO	342
SightPRO 2-in-1	343
SightPRO 6-in-1	340
SightPRO Box	339
SightPRO Mini	338
SightPRO Twin Spot	341
Sirio	75
SirioDISC CCT	63
Sleek CCT	162
Smart GU10	358
Smart IKON	317
Smart Orbital	31
Smart Seina	305
Smart ShieldPRO	20
Speculo	32
Speculo	33
Spegel CCT	226
Sten	211
Stratus	69
Stratus	74
Stratus Base	68
StratusDISC adjustable CCT	65
StratusPRO	70
StratusPRO	71
StratusPRO	72
StratusPRO TPA/UGR19	71
StratusULTRA UGR19	73
Tango	252
Titan Anti-Glare	103
Toko	152
Track	131
Track Accessories	132-133
Traditional	271
Traditional PIR	271

Product Name	Page
Tribeca	256
Trimless Downlight	44
Trimless linkable	43
Triton	332
Twilight detector	380
ULTRA EM 2-in-1	113
Ultra Sensor 2-in-1	113
Visus	157
Vulcan CCT	263
Ware	266
Xeno	49
York	268
York PIR	268
Zeke	151
Zone	277

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

[illegible]

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



For more information on our warranties please see
www.saxbytrade.com



**AVAILABLE
NOW!**



www.saxbytrade.com

Saxby Lighting, Cabot Lane,
Creekmoor, Dorset BH17 7BY

Call: 033 00 555 885

Email: saxby-sales@saxbylighting.com

